73 AMATEUR RADIO

June 1998
ISSUE #393
USA $2.95
CAN $3.95

International Edition

A WGE Publication

HAMS GO DIGITAL!

Flip-Flop Tutorial
Packet BBS Basics
RS-232 Explained
Much, much more!

PROJECTS

LED X–Y Scope
PSK Data System
A/D Conversions

REVIEWS

IC–375A Transceiver
LMW 2304 MHz Transverter
Ramsey Multimeter

06
0 74820 08725 1

ICOM HAS ALL YOUR BASES COVERED

ICOM has your winning line-up for fixed, portable, and mobile operations on today's hottest amateur bands. Slide into the winner's circle with ICOM's deluxe "75" series transceivers, with a team committed to excellence from VHF to UHF communications. Each compact all-mode unit delivers maximum performance, reliability, and ease of operation. It's a championship line-up!

All "75" series transceivers are an FMer's dream rig with 99 tunable memories, four scan modes, odd offsets, packet compatibility, scanning mic and DDS system for data input. SSB/OSCAR delights include dual VFOs, PBT, crystal-resonant IF notch, noise blanker, and semi/full CW break-in. The glamorous "75" units provide ultimate mobiling flexibility.

220MHz. The 25-watt output **IC-375A** receives 216.0-236.0MHz, transmits 220.0-225.0MHz, and includes AC supply. A genuine masterpiece!

440MHz. Enjoy top-notch 430.0-450.0MHz operation wi the 25-watt **IC-475A** featuring AC supply, or go high power using the 75-watt, AC/DC-powered **IC-475H** "super rig."

6 METERS/10 METERS. Join the fun of sunspot cycle 22 openings with the superb 10-watt **IC-575A** It receives 26-56MHz, transmits 28-29.7MHz, an 50-54MHz, and includes AC supply. The **IC-575A**, a true superstar!

SUPER SCANNING
Monitor all of today's action with four scanning modes: spectrum, programmable, mode, and memory. Scans 99 memories in five seconds!

2 METERS. ICOM's 25-watt **IC-275A** VHF leader receives 138.0-174.0MHz including the public service, marine, and weather bands, and transmits 140.1-150.0MHz. Includes AC supply. The **IC-275H** is 12-volt DC-powered, produces 100 watts output, and will operate with external AC supply. Two of ICOM's heavy hitters!

ICOM HAS ALL YOUR BASES COVERED! Me the unbeatable line-up of ICOM equipment at your local ICOM dealer.

ICOM

ICOM America, Inc.
2380-116th Ave. N.E., Bellevue, WA 98004
Customer Service Hotline (206) 454-7619
3150 Premier Drive, Suite 126, Irving, TX 75063
1777 Phoenix Parkway, Suite 201, Atlanta, GA 303
ICOM CANADA, A Division of ICOM America, Inc.,
3071 - #5 Road, Unit 9, Richmond, B.C. V6X 2T4

All stated specifications are approximate and subject to char without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions. BA118

THE ALL NEW PRIVATE PATCH IV BY CSI HAS MORE COMMUNICATIONS POWER THAN EVER BEFORE

- **Initiate phone calls from your HT or mobile**
- **Receive incoming phone calls**

NEW! • **Telephone initiated control. . .**

- ✓ **Operate your base station with complete control from any telephone**
- ✓ **Change frequencies from the controlling telephone**
- ✓ **Selectively call mobiles using regenerated DTMF from any telephone**
- ✓ **Eavesdrop the channel from any telephone**
- ✓ **Use as a wire remote using ordinary dial up lines and a speaker phone as a control head.**

The new telephone initiated control capabilities are awesome. Imagine having full use and full control of your base station radio operating straight simplex or through any repeater *from any telephone!* From your desk at the office, from a pay phone, from a hotel room, etc. You can even change the operating channel from the touchpad!

Our digital VOX processor flips your conversation back and forth fully automatically. There are no buttons to press as in phone remote devices. And you are in full control 100% of the time!

The new digital dialtone detector will automatically disconnect Private Patch IV if you forget to send # (to remotely disconnect) before hanging up. This powerful feature will prevent embarassing lock-ups.

The importance of telephone initiated control for emergency or disaster communications cannot be overstated. Private Patch IV gives you full use of the radio system from any telephone. And of course you have full use of the telephone system from any mobile or HT!

To get the complete story on the powerful new Private Patch IV contact your dealer or CSI to receive your free four page brochure.

Private Patch IV will be your most important investment in communications.

✓ = **NEW FEATURE**

- ✓ * /# or multi-digit connect/disconnect
- ✓ Fully regenerated tone dialing
- Pulse dialing
- Toll protection
- Secret toll override code
- Busy signal disconnect
- ✓ Dialtone disconnect
- CW identification
- Activity timer
- Timeout timer
- ✓ Telephone initiated control
- ✓ Regenerated DTMF selective calling
- Ringout
- ✓ Ringout or Auto Answer on 1-8 rings
- Busy channel ringout inhibit
- ✓ Status messages
- ✓ Internally squelched audio
- MOV lightning protection
- ✓ Front panel status led's
- ✓ Separate CW ID level control
- ✓ 24 dip switches make all features user programmable/selectable.

- Connects to MIC and ext. speaker jack on *any* radio. Or connect internally if desired.
- Can be connected to any HT. (Even those with a two wire interface.)
- Can be operated simplex, through a repeater from a base station or connected directly to a repeater for semi-duplex operation.
- 20 minutes typical connect time
- Made in U.S.A.

OPTIONS

1. ½ second electronic voice delay
2. FCC registered coupler
3. CW ID chip

CONNECT SYSTEMS INC.
23731 Madison St.
Torrance CA 90505
Phone: (213) 373-6803

AMATEUR ELECTRONIC SUPPLY
Milwaukee WI, Wickliffe OH, Orlando FL, Clearwater FL, Las Vegas NV
BARRY ELECTRONICS CORP.
New York NY
EGE, Inc.
Woodbridge VA
ERICKSON COMMUNICATIONS
Chicago IL
HAM RADIO OUTLET
Anaheim CA, Burlingame CA Oakland CA, Phoenix AZ San Diego CA, Van Nuys CA, Atlanta GA
HENRY RADIO
Los Angeles CA
INTERNATIONAL RADIO SYSTEMS
Miami FL
JUNS ELECTRONICS
Culver City CA
MADISON ELECTRONICS SUPPLY
Houston TX
MIAMI RADIO CENTER CORP.
Miami FL
MIKES ELECTRONICS
Ft. Lauderdale, Miami FL
N&G DISTRIBUTING CORP.
Miami FL
OMNI ELECTRONICS
Laredo TX
PACE ENGINEERING
Tucson AZ
THE HAM STATION
Evansville IN
WESTCOM
San Marcos CA
CANADA:
CARTEL ELECTRONIC DISTRIBUTORS
Surrey B.C.
COM-WEST RADIO SYSTEMS, LTD.
Vancouver B.C.

CIRCLE 12 ON READER SERVICE CARD

Magnetic Attraction

Tired of paying higher and higher prices for V.H.F. magnetic mount antennas? Hustler has the solution. Two new series of antennas at suprisingly affordable prices. Built with the same quality and performance you expect from a Hustler product. Designed to offer you years of trouble-free operation. Priced to **save you money.**

FX SERIES (pictured mounted)

- 3.4 db gain | 5/8 wave
- 200 watt rating
- 15 foot coax
  PL-259 connector installed
- Magnetic mount holds to
  100 mph

Model FX-2 — 2 Meter, black & chrome
Model FX-220 — 220 MHz, black and chrome

24.95 ea.

Also Available in Black
Model FX-2B, 2 Meter
Model FX-220B, 220 MHz ..... **29.95** ea.

RX SERIES (pictured lying down)

- 3.4 db gain | 5/8 wave
- 100 watt rating
- 15 foot coax
  PL-259 connector installed
- Magnetic mount holds to 75 mph

Model RX-2, 2 meter black and chrome
Model RX-220, 220 MHz, black & chrome

19.95 ea.

Also Available in Black
Model RX-2B, 2 meter
Model RX-220B, 220 MHz ..... **24.95** ea.

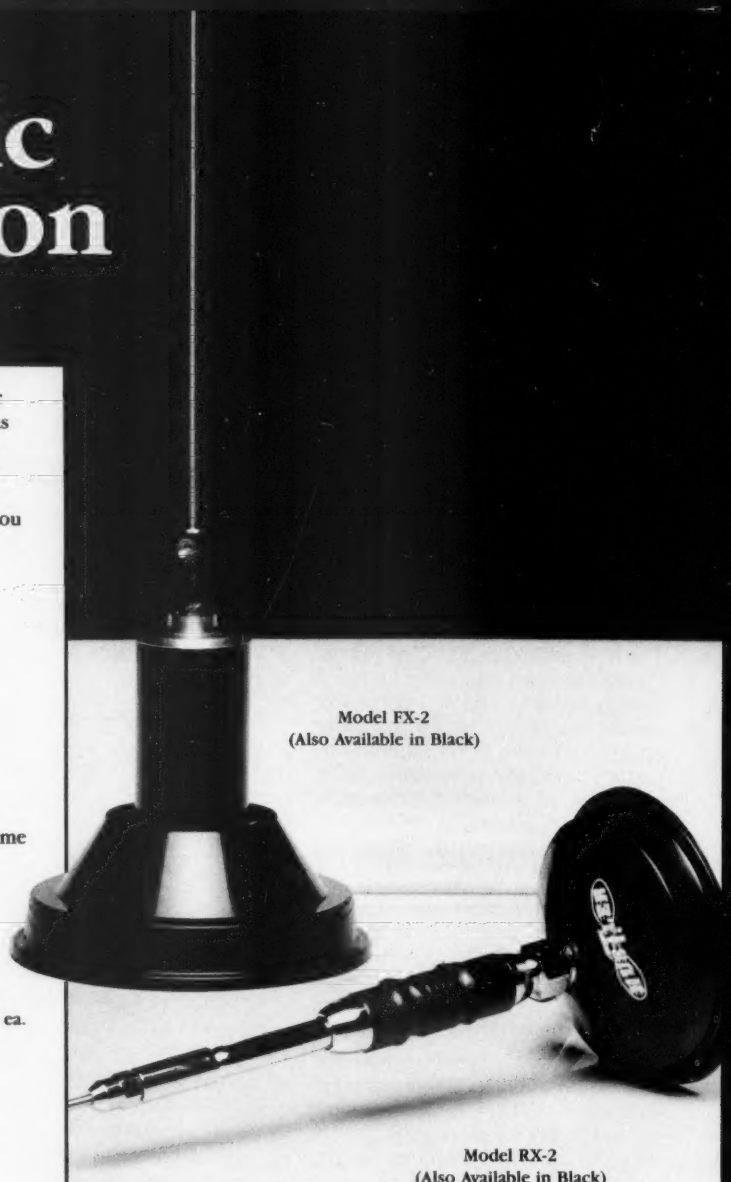

Model FX-2
(Also Available in Black)

Model RX-2
(Also Available in Black)

HUSTLER®

One Newtronics Place
Mineral Wells, Texas 76067
(817) 325-1386

CIRCLE 269 ON READER SERVICE CARD

MFJ multi-mode data controller

MFJ *shatters* the 6 mode barrier *and* the price barrier with the MFJ-1278 and gives you . . . Packet, RTTY, ASCII, CW, WEFAX, SSTV and Contest Memory Keyer . . . 7 digital modes . . . for an affordable $249.95

Amateur radio's newest multi-mode data controller -- the MFJ-1278 -- lets you join the fun on Packet, RTTY, ASCII, CW, Weather FAX, SSTV and gives you a full featured Contest Memory Keyer mode . . . you get 7 modes . . . for an affordable $249.95.

Plus you get high performance HF/VHF/CW modems, software selectable dual radio ports, precision tuning indicator, 32K RAM, AC power supply and more.

You'll find it *the most user friendly of all multi-modes.* It's menu driven for ease of use *and* command driven for speed.

A high resolution 20 LED tuning indicator lets you *tune in signals **fast** in any mode.* All you have to do is to center a single LED and *you're precisely tuned in to within 10 Hz* -- and it shows you which way to tune!

All you need to join the fun is an MFJ-1278, your rig and any computer with a serial port and terminal program.

You can use the MFJ Starter Pack to get on the air instantly. It includes computer interfacing cable, terminal software and friendly instructions . . . everything you need to get on the air fast. Order MFJ-1282 (disk)/MFJ-1283 (tape) for the C-64/128 and VIC-20 or MFJ-1284 for the IBM or compatible, $19.95 each.

Packet

Packet gives you the fastest and most reliable error-free communications of any amateur digital mode.

With MFJ's super clone of the industry standard -- the TAPR TNC-2 -- you get **genuine TAPR** software/hardware plus more -- not a "work-a-like" imitation.

Extensive tests published in *Packet Radio Magazine* ("HF Modem Performance Comparisons") prove the TAPR designed modem used in the MFJ-1278 gives better copy with proper DCD operation under all tested conditions than the other modems tested.

Hardware DCD gives you more QSOs because you get reliable carrier detection under busy, noisy or weak conditions.

A hardware HDLC gives you full duplex operation for satellite work or for use as a full duplex digipeater. And, it makes possible speeds in excess of 56K baud with a suitable external modem.

Good news for SYSOPs! New software lets the MFJ-1278 perform flawlessly as a WORLI/WA7MBL bulletin board TNC.

Baudot RTTY

You can copy all shifts and all standard speeds including 170, 425 and 800 Hz shifts and speeds from 45 to 300 baud. You can *copy not only amateur RTTY but also press, weather and other exciting traffic.*

A high performance modem lets you copy both mark and space for greatly improved copy under adverse conditions. It even tracks slightly drifting signals.

You can transmit both narrow and wide shifts. The wide shift is a standard 850 Hz shift with mark/space tones of 2125/2975 Hz. *This lets you operate MARS and standard VHF FM RTTY.*

You get both the American Western Union and the international CCITT character sets, Autostart for unattended reception and selectable "Diddle".

A receive Normal/Reverse software switch eliminates retuning and Unshift-On-Space reduces errors under poor receiving conditions.

ASCII

You can transmit and receive 7 bit ASCII using the same shifts and speeds as in the RTTY mode and using the same high performance modem. You also get Autostart and selectable "Diddle".

CW

You get a Super Morse Keyboard mode that lets you send perfect CW effortlessly from 5 to 99 WPM, including all prosigns -- it's tailor-made for traffic handlers.

A huge type ahead buffer lets you send smooth CW even if you "hunt and peck".

You can store entire QSOs in the message memories, if you wanted to! You can link and repeat any messages for automatic CQs and beaconing. Memories also work in RTTY and ASCII modes.

A tone Modulated CW mode turns your VHF FM rig into a CW transceiver for a new fun mode. It's perfect for transmitting code practice over VHF FM.

An AFSK CW mode lets you ID in CW.

The CW receive mode lets you copy from 1 to 99 WPM. Even with sloppy fists you'll be surprised at the copy you'll get with its powerful built-in software.

You also get a random code generator that'll help you copy CW faster.

Weather FAX

***You'll** be fascinated as you watch WEFAX signals blossom into full fledged weather maps on your printer.* Other interesting FAX pictures can also be printed -- such as some news photographs from wire services.

Any Epson graphics compatible printer will print a wealth of interesting pictures and maps.

Automatic sync and stop lets you set it and leave it for no hassle printing.

You can save FAX pictures and WEFAX maps to disk if your terminal program lets you save ASCII files to disk.

Pictures and maps can be *printed to screen in real time or from disk* on IBM and compatibles with the MFJ-1284 Starter Pack.

You can transmit FAX pictures right off disk and have fun exchanging and collecting them.

Slow Scan TV

The MFJ-1278 introduces you to the exciting world of slow scan TV.

You'll not only enjoy receiving pictures from thousands of SSTVers all-over-the-world but you can send your own pictures to them, too.

You can print slow scan TV pictures on any Epson graphics compatible printer. If you have an IBM PC or compatible you can print to screen in near real time or from disk with the MFJ-1284 Starter Pack.

You can transmit slow scan pictures right off disk -- there's no need to set up lights and a camera for a casual contact.

You can save slow scan pictures on disk from over-the-air QSOs if your terminal program lets you save ASCII files.

The MFJ-1278 transmits and receives 8.5, 12, 24, and 36 second black and white format SSTV pictures using two levels.

Contest Memory Keyer

***Nothing** beats the quick response of a memory keyer during a heated contest.*

You'll score valuable contest points by completing QSOs so fast you'll leave your competition behind. And you can snag rare DX by slipping in so quickly you'll catch everyone by surprise.

You get iambic operation with dot-dash memories, self-completing dots and dashes and jamproof spacing.

Message memories let you store contest RST, QTH, call, rig info -- everything you used to repeat over and over. You'll save precious time and work more QSOs.

You get automatic incrementing serial numbering. In a contest it can make the difference between winning and losing.

A weight control lets you penetrate QRM with a distinctive signal or lets your transmitter send perfect sounding CW.

More Features

Turn on your MFJ-1278 and it sets itself to match your computer baud rate. Select your operating mode and the correct modem is automatically selected.

***Plus** . . .* printing in all modes, threshold control for varying band conditions, tune-up command, lithium battery backup, RS-232 and TTL level serial ports, watch dog timer, FSK and AFSK outputs, output level control, speaker jack for both radio ports, test and calibration software, Z-80 at 4.9 MHz, 32K EPROM, and socketed ICs. FCC approved. 9x1½x9½ inches. 12 VDC or 110 VAC.

Get yours today and join the fun crowd!

FOR YOUR NEAREST DEALER
or to order call toll free
800-647-1800

One Year Unconditional Guarantee

MFJ

MFJ ENTERPRISES, INC.
Box 494, Miss. State, MS 39762
601-323-5869 **Telex:** 53-4590 MFJSTKV

MFJ . . . making quality affordable

CIRCLE 24 ON READER SERVICE CARD

Welcome, Newcomers!

Digital communications—what could be easier? Just think about it.

The simplest thing to do with an electronic device is to turn it on and off, or to change a voltage from high to low or low to high. It's easy for a man or machine to differentiate between these two conditions or **logic states**. A light turned on, for example, may mean yes, while off means no; true and false; stop and go; and so on. A simple communications system like this is called **binary**, meaning to have two parts.

In digital communications, all information is expressed in terms of ones and zeros or **bits** (binary digits). A device may interpret a high voltage as a one, and a low voltage as a zero. With two choices, the information passed in such a simple system is obviously very limited. Therefore, we need to expand the system's "vocabulary." We do this by creating digital words, or **bytes**, made up of a convenient number of bits, usually 8, 16, or 32.

Let's take a look at a system that uses two bits for a digital word. The possible choices for words are 00, 01, 10, and 11. The choice of meaning for each digital word is ours alone. We can assign, say, "yes" and "no" to 11 and 00, respectively, and "probably" and "unlikely" to 10 and 01, respectively. Or suppose we wanted to express a voltage with our new vocabulary. This gives us four choices: perhaps 0, 1, 2, and 3 volts, or even 0, 15, 30, and 45 volts. Again, the choice is ours!

Now, let's get really adventurous and try to express the alphabet and numbers 0–9 with digital words. Thus, we need enough choices for all upper and lower case letters (52) and the numbers 0–9. That makes a total of 62 choices required. How large will our digital words have to be?

Every time we add a bit onto a digital word, the possible combinations increase by a factor of two. In the last example, we went from two to four choices by adding one bit. Three-bit words give us eight choices, and so on. To accommodate 62 choices, we need digital words six bits long, which actually produces 64 choices ($2 \times 2 \times 2 \times 2 \times 2 \times 2 = 2^6 = 64$) in our digital vocabulary. Thus, we can have a fairly complete alphanumeric digital vocabulary with six-bit words, and even have enough room for a couple of punctuation characters.

There are many digital coding schemes for alphabets and special computer characters. The five-unit **Baudot** code is used in ordinary radioteletype (RTTY) transmissions. The seven-bit **ASCII** code provides 128 choices for characters, and includes many characters peculiar to computer operations.

How do we turn voice and other **analog** signals into bytes? Special integrated circuits known as analog-to-digital **(A/D) converters** sample a signal periodically, measure its voltage, and convert the voltage to digital words. At the receiver, a **D/A converter** carries out the reverse process.

Once we have data into bits, the next step is to send it over a radio link. Again, we normally only have to worry about two choices—ones and zeros. The simplest method would turn a carrier on for a one and off for a zero, much like Morse code transmission. This method is called on-off keying (OOK). A more reliable method of data transmission uses frequency shift keying **(FSK)** in which two different tones are used to represent ones and zeros. Phase-shift keying **(PSK)** is not as common on the ham bands as in the commercial world. This method takes a constant frequency signal and alters its phase (position in degrees) to send a bit or digital word. A shift of 180 degrees is known as biphase shift keying **(BPSK)**.

Electronic communications links are subject to noise, and to minimize or eliminate errors, many systems use some form of **error correction**. Some error correction methods simply identify that an error has occurred. **Parity** schemes add a bit onto the end of a byte. With **even parity**, the total number of ones in a word will be an even number. For example, if 11101100 is our data byte, the parity bit added to the end would be a one: 111011001, thus giving an even number of one bits in the whole word. If an **odd parity** scheme had been selected, the parity bit would be zero: 111011000.

If the parity does not match upon receipt, the operator or system may request a retransmission of the suspect word.

Mode A of **AMTOR** uses an automatic repeat request **(ARQ)** error correction scheme, while Mode B uses a forward error correction **(FEC)** method. With FEC, additional bits are added to each byte to more closely identify where in a word an error has occurred. FEC schemes can be very complex.

The beauty of digital communications lies in its fundamental simplicity and the ability to **interface** the outside world to electronic devices, computers, and transmission systems. Using these methods, we can exchange, store, and retrieve information in ways only dreamed about a decade ago. Amateur radio has entered a new age, and it's exciting to be a part of it. Come join us! 73

—Larry Ledlow, Jr. NA5E

Glossary for Newcomers

A/D converters—Special ICs that sample incoming waveforms (voice, video, etc) and create digital words (bytes) proportional to the voltage. **D/A converters** reverse the process and recreate the original waveform from the bytes.

AMTOR—AMateur Teleprinting Over Radio; a radio teletype system developed by Peter Martinez G3PLX based on the SITOR maritime system. Modes A and B of AMTOR use ARQ and FEC error correction, respectively.

Analog—A signal that varies its amplitude continuously over a given voltage range.

ASCII—American Standard Code for Information Interchange; a seven-unit teleprinter code designed primarily for computer applications.

Asynchronous—A method of signal transmission that does not use any reference to a time scale; i.e., data transmissions can occur at any time. Manual morse, voice, and manually operated teletype transmissions are asynchronous. **Synchronous** data is sent according to a strict time sequence so the transmitter and receiver are synchronized.

Baud rate—A measure of data transmission speed. One baud is one element or pulse, which may correspond to one or several bits each. Baud rate is NOT always equivalent to bit rate.

Baudot—A five-unit radio teletype code commonly used on the amateur bands. It does not provide for error correction.

bit—A binary digit expressed as one or zero; fundamental element of digital communications.

byte—A digital word, often made up of eight bits.

Error correction—A coding scheme that allows detection and correction of errors in a data transmission. A system may initiate an automatic repeat request, or **ARQ**, which tells the transmitter to repeat a block of data in which an error was detected. **FEC**, or forward error correction, actually builds a correction scheme into a data stream, either by adding bits to each word or by repeating each word several times to increase the chance of proper reception.

FSK—Frequency shift keying; the use of separate tones to send data bits.

Interface—The point at which data is transferred from one component to another.

modem—Modulator/demodulator; a device used to send and receive digital data.

Parity—An expression that indicates whether the number of bits in a code word is even or odd.

PSK—Phase shift keying; the use of phase changes of a constant frequency signal to send data bits. 180-degree phase shifts generate bi-phase shift keying, **BPSK**.

73 AMATEUR RADIO

JUNE 1988 Issue # 333

STAFF

PUBLISHER
Wayne Green W2NSD/1
ASSOCIATE PUBLISHER
Stuart Norwood

EDITOR-IN-CHIEF
Larry Ledlow, Jr. NA5E
SENIOR EDITOR
Bryan Hastings KA1HY
COPY EDITOR
Rebecca Niemela
EDITORIAL ASSISTANT
Linda Reneau
INTERNATIONAL EDITOR
Richard Phenix
ART DIRECTOR
Bob Dukette
GRAPHIC DESIGN MANAGER
Deborah Smith
GRAPHIC DESIGNER
Marilyn Moran
ASSOCIATES
Mike Bryce WB8VGE
Leon Fletcher N6HYK
Jim Gray W1XU
Chod Harris VP2ML
Dr. Marc Leavey WA3AJR
Brian Lloyd WB6RQN
Andy MacAllister WA5ZIB
Bill Pasternak WA6ITF
Peter Putman KT2B
Mike Stone WB8QCD
Dr. Ralph Taggart WB8DQT
Arliss Thompson W7XU

ADVERTISING
1-603-525-4201
1-800-225-5083
SALES MANAGER
Sam Greene
ADVERTISING SALES
Ed Verbin
SALES SERVICES MANAGER
Hope Currier

WGE PUBLISHING, INC.
CHIEF FINANCIAL OFFICER
Tim Pelkey
CIRCULATION DIRECTOR
Rodney Bell
TYPESETTING/PAGINATION
Bob Dukette, Systems Supervisor
Steve Jewett KA1MPM, Linda Drew, Susan Allen
GRAPHICS SERVICES
Richard Clarke, Manager
Sue B. Flanagan,
Jodi Johnson, Dale Williams
GRAPHICS PHOTOGRAPHER
Dan Croteau

Editorial Offices
WGE Center
Peterborough, NH 03458-1194
603-525-4201
Subscription Customer Service
1-800-227-7585
Foreign Subscribers call
1-603-525-4201

Wayne Green Enterprises is a division of International Data Group.

73 Amateur Radio (ISSN 0889-5309) is published monthly by WGE Publishing, Inc., a division of Wayne Green Enterprises, Inc., WGE Center, Peterborough NH 03458-1194.

Entire contents © 1988 by WGE Publishing, Inc. No part of this publication may be reproduced without written permission from the publisher.

TABLE OF CONTENTS

FEATURES



11 Flip-Flop/Latch Circuit
Welcome to digital electronics W4RNL

14 New York City School Program
Carole Perry's kids learning with radio WB2MGP

20 Digital X-Y Oscilloscope
Handy tuning scope project WA9TYU

22 Care and Feeding of PBBS
Etiquette and protocol for packeteers WA1FHB

29 UoSATs Part II
Fascination and fun with these British birds N5AHD

32 Buyer Beware
Sensible advice for buying second-hand gear WD8RCL

34 A Pulsed Bi-Phase Communications System
19.2 kB in less than a kilohertz! WA1FHB

38 Telegraph Trail Part IV
Our final chapter W6CK

40 Briefly Speaking: RS-232
The straight story on what it means W5PFG

42 Bicycle Mobile R & D Lab
Small is beautiful N4RVE

51 Digital Voice Compression
Let's talk about it WA3YQY

54 Voltage Sampling with a Computer
Practical A/D conversions ..... Magee



REVIEWS

18 Ramsey D-5100 Digital Auto-ranging Multimeter
A top flight tool for the bench WB9RRT

26 ICOM IC-375A 220 MHz Multimode Transceiver
A rig worth waiting for KT2B

DEPARTMENTS

FEEDBACK... FEEDBACK!
It's like being there—right here in our offices! How? Just take advantage of our FEEDBACK card on page 89. You'll notice a feedback number at the beginning of each article and column. We'd like you to rate what you read so that we can print what types of things you like best. And then we will draw one Feedback card each month for a free subscription to *73*.

64 Above and Beyond
88 Ad Index
83 Barter and Buy
74 Circuits
48 Dealer Directory
85 DX
49 Ham Help
78 Hamsats
81 Index: 6/88
98 Letters
6 Never Say Die
45 New Products
104 Op Ed
60 Packet Talk
76 Propagation
67 QRP
9 QRX
87 QTH DX
62 RTTY Loop
90 73 International
95 Special Events
80 Tech Tips
70 Weathersats
4 Welcome, Newcomers



Cover by Deborah Smith
Photography by Suzanne Torsheya

Number 2 on your Feedback card

NEVER SAY DIE

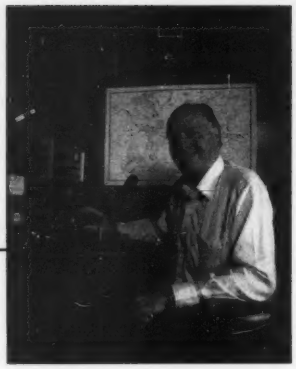

A Small World

An interesting article on cosmology in a recent *Discover* magazine mentioned a Chandra Wickramasinghe as the author of several books. Hmmm. How many Wickramasinghes can there be in the world? Could it be as common in Sri Lanka as Jones in America?

This took me back to 1959 and my flight around the world on Operation World-Wide. Lordy, that was almost 30 years ago! There I met Soma Wickramasinghe 4S7ES and her beautiful daughter Chitra during a two-day visit to Colombo, Ceylon. Soma was by far the most active ham on Ceylon. Indeed, I'd even worked her from my W2NSD home station several times.

Operation World-Wide was the brainstorm of W8PLJ, the PR director at the Pure-Pak division of Ex-Cell-O Corporation. Pure-Pak—you'll see their trade mark on almost any milk carton—was interested in doing a film of their milk container operations around the world. Since the cost of sending a film crew on such a jaunt was prohibitive, some way to cut this cost had to be found. The obvious answer was to get the government to foot the bill.

The Military Air Transport Service (MATS) provided an old C-54 left over from the Berlin Airlift operation and a crew. Pure-Pak provided the film crew. In addition to filming the milk-carton operations, the crew also would do a film on MATS for the government, thereby justifying the expense of the plane and crew. How about a ham station on the plane as it flies around the world? Great idea!

As the then-editor of *CQ*, I heard about the trip, and also found out that one of the two hams selected to go along to operate had suddenly developed a heart problem. I quickly volunteered, and the next thing I knew I was aboard the plane, leaving from McGuire Air Force Base, New Jersey, for a trip around the world.

The ham gear was the newest of new: two of five prototype Hallicrafters FPM-200 sideband solid-state transceivers, with a backup of the older Hallicrafters HT-32 and SX101 tube gear. Aboard with me were Bill Leonard W2SKE for CBS News, Hallicrafters' Bud Drobish W9QVA, Pure-Pak's W8OLJ, the film crew, the Air Force flight crew and an Air Force PR chap.

Unauspicious Start

The first stop was Newfoundland (which was still a separate country then). The two prototype rigs blew up a few hours out of New Jersey. No problem, I thought, let's fix 'em. No, said Bud, we have to ship them back to the factory to be fixed. We had no spares, no schematic or service information and all of the transistors had been soldered into the circuit boards, so repairs were out.

We didn't get that solid-state rig back until late in the trip, despite heroic efforts by Hallicrafters. The older HT-32 tube emergency rig worked fine, so Bill and I were able to talk with hams all around the world as we flew. All contacts were taped and excerpts were used on NBC's "Monitor" program.

(I even heard a contact between me and a Romanian ham on a Hallicrafters 45 rpm record a couple years later. I remember driving along Coney Island Ovenue in Brooklyn in my Porsche Speedster in which I had a Philips record player. I was listening to the Hallicrafters "Listen To The World" promotion record—and there I was! And nobody around to tell.)

The Operation World-Wide route took us in short, low altitude hops to Newfoundland, Bermuda, The Azores, Scotland, Paris, Berlin, Haderslev (Denmark), Rome, Athens, Izmir (Turkey), Alexandria (Egypt), Aden (South Yemen), Karachi, Colombo, Bangkok, Saigon (where an air raid was in progress when we arrived), Philippines, Taiwan, Okinawa, Seoul, Tokyo, Guam, Wake

Continued from page 44

QSL OF THE MONTH

To enter your QSL, mail it in an envelope to *73*, WGE Center, 70 Rte. 202 N., Peterborough NH 03458, Attn: QSL of the Month. Winners receive a one-year subscription (or extension) to *73*. Entries not in envelopes cannot be accepted.

QRM

Editorial Offices
WGE Center
Peterborough NH 03458-1194
phone: 603-525-4201

Advertising Offices
WGE Center
Peterborough NH 03458-1194
phone: 800-225-5083

Circulation Offices
WGE Center
Peterborough NH 03458-1194
phone : 603-525-4201

Manuscripts

Contributions in the form of manuscripts with drawings and/or photographs are welcome and will be considered for possible publication. We can assume no responsibility for loss or damage to any material. Please enclose a stamped, self-addressed envelope with each submission. Payment for the use of any unsolicited material will be made upon acceptance. A premium will be paid for accepted articles that have been submitted electronically (CompuServe ppn 70310,775 or MCI Mail "WGEPUB") or on disk as an IBM-compatible ASCII file. All contributions should be directed to the *73* editorial offices. "How to Write for *73*" guidelines are available upon request. US citizens must include their social security number with submitted manuscripts.

Reprints: The first copy of an article—$3.00 (each additional copy–$1.50). Write to 73 Amateur Radio Magazine, WGE Center, Rt. 202 North, Peterborough, NH 03458. ATTN: Article Reprints.

Subscription Information

One Year (12 issues) $24.97; Two Years (24 issues) $44.98. Canada, Mexico and Foreign Surface: One Year $31.75 (US Funds); Two Year $57.00 (US Funds). Foreign Airmail: One Year $39.00 (US Funds); Two Years $70.00 (US Funds). Send new or renewal notices, inquiries, and change of address to 73 Amateur Radio, P.O. Box 931, Farmingdale NY 11737. Allow 4-6 weeks for subscription and change of address processing. For Customer Service, call toll-free at 1-800-227-7585. For renewals and changes of address, please include the address label from your most recent issue of 73. For gift subscriptions, include your name and address as well as those of the gift recipients. Second class postage paid at Peterborough NH 03458, and at additional mailing offices. Canadian second class mail registration number 9566. Microfilm Edition—University Microfilm, Ann Arbor MI 48106.

Postmaster: Send address changes to 73 Amateur Radio, P.O. Box 931, Farmingdale NY 11737.

Contract: Too bad—merely reading this is a binding contract between you and the publisher. To get more pages for *73*, more advertising is necessary. To get more adveritsing, more readers are needed. You hereby agree to be an official *73* subscription agent. You will tell every ham you contact that you read about him in *73* this month so he'll rush out to buy a copy. It's just a little Green lie, so stop sweating. It'll work. He'll frantically read every word in the magazine, discovering its magnificence in the process. Look, if reason doesn't work we'll have to use subterfuge.

KENWOOD

pacesetter in Amateur Radio

220 MHz TM-321A Coming Soon!

Here's One for You!

TM-221A/321A/421A

2 m and 70 cm FM compact mobile transceivers

The all-new TM-221A, TM-321A and TM-421A FM transceivers represent the "New Generation" in Amateur radio equipment. The superior Kenwood GaAs FET front end receiver; reliable and clean RF amplifier circuits, and new features all add up to an outstanding value for mobile FM stations! The optional RC-10 handset/control unit is an exciting new accessory that will increase your mobile operating enjoyment!

- **TM-221A provides 45 W, TM-321A, 25 W. The TM-421A is the first 35 W 70 cm mobile!** All three models have adjustable 5 W low power.
- **Selectable frequency steps** for quick and easy QSY.
- **TM-221A receives from 138-173.995 MHz. This includes the weather channels!** Transmit range is 144-148 MHz. Modifiable for MARS and CAP operation. (MARS or CAP permit required.) *(Specifications guaranteed for Amateur band use only.)*
- **TM-321A covers 220-224.995 MHz. The TM-421A covers 438-449.995 MHz.**
- **Built-in front panel selection of 38 CTCSS tones.** TSU-5 programmable decoder optional.
- **Simplified front panel controls**—makes operating a snap!
- **16 key DTMF hand mic., mic. hook, mounting bracket, and DC power cable included.**
- **Kenwood non-volatile operating system.** All functions remain intact even when lithium battery back-up fails. (Lithium cell memory back-up—est. life 5 yrs.)
- **Packet radio compatible!**
- **14 full-function memory** channels store frequency, repeater offset, sub-tone frequencies, and repeater reverse information. **Repeater offset on 2 m is automatically selected.** There are **two channels** for "odd split" operation.
- **Programmable band scanning.**
- **Memory scan with memory channel lock-out.**
- **Super compact:** approx. 1-1/2"Hx5-1/2"Wx7"D.
- **New amber LCD display.**
- **Microphone test function on low power.**
- **High quality, top-mounted speaker.**
- **Rugged die-cast chassis and heat sink.**

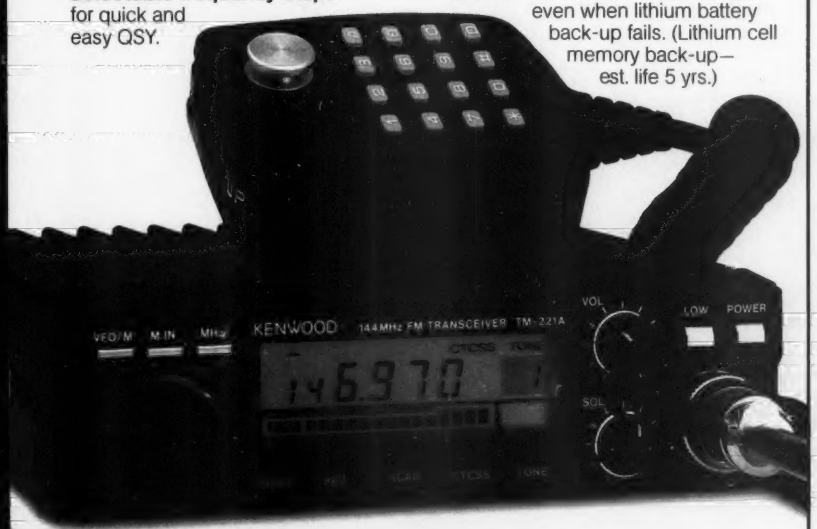

RC-10 Remote Controller

For TM-221A/321A/421A. Optional telephone-style handset remote controller RC-10 is specially designed for mobile convenience and safety. All front panel controls (except DC power and RF output selection) are controllable from the RC-10. One RC-10 can be attached to two transceivers with the optional PG-4G cable. When both transceivers are connected to the RC-10, **cross band, full duplex repeater** operation is possible. (A control operator is needed for repeater operation.)

Optional Accessories:

• **RC-10** Multi-function handset remote controller • **PG-4G** Extra control cable, allows TM-221A/TM-421A full duplex operation • **PS-50/PS-430** DC power supplies • **TSU-5** Programmable CTCSS decoder • **SW-100A** Compact SWR/power/volt meter (1.8-150 MHz) • **SW-100B** Compact SWR/power/volt meter (140-450 MHz) • **SW-200A** SWR/power meter (1.8-150 MHz) • **SW-200B** SWR/power meter (140-450 MHz) • **SWT-1** Compact 2 m antenna tuner (200 W PEP) • **SWT-2** Compact 70 cm antenna tuner (200 W PEP) • **SP-40** Compact mobile speaker • **SP-50B** Mobile speaker • **PG-2N** Extra DC cable • **PG-3B** DC line noise filter • **MC-60A, MC-80, MC-85** Base station mics. • **MC-55** (8-pin) Mobile mic. with gooseneck and time-out timer • **MA-4000** Dual band antenna with duplexer (mount not suppiied) • **MB-201** Extra mobile mount

Specifications and prices subject to change without notice or obligation.
Complete service manuals are available for all Kenwood transceivers and most accessories.

KENWOOD

KENWOOD U.S.A. CORPORATION
2201E. Dominguez St., Long Beach, CA 90810
P.O. Box 22745, Long Beach, CA 90801-5745

KENWOOD

pacesetter in Amateur Radio

220 MHz TH-315A Here Now!

This HT Has it All!

TH-215A/315A/415A

Full-featured Hand-held Transceivers

Kenwood brings you the greatest hand-held transceiver ever! More than just "big rig performance," the new TH-215A for 2 m, TH-315A for 220 MHz, and TH-415A for 70 cm pack the most features and the best performance in a handy size. And our full line of accessories will let you go from hamshack to portable to mobile with the greatest of ease!

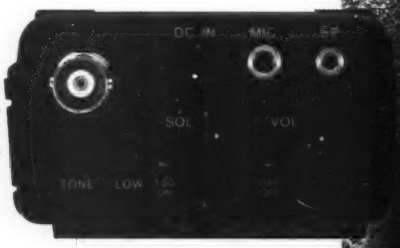

- **Wide receiver frequency range.** Receives from 141-163 MHz. Includes the weather channels! Transmit from 144-148 MHz. Modifiable to cover 141-151 MHz (MARS or CAP permit required).
- **TH-315A covers 220-225 MHz, TH-415A covers 440-449.995 MHz.**
- **5, 2.5, or 1.5 W output, depending on the power source.** Supplied battery pack (PB-2) provides 2.5 W output. Optional NiCd packs for extended operation or higher RF output available.
- **CTCSS encoder built-in.** TSU-4 CTCSS **decoder** optional.
- **10 memory channels store any offset, in 100-kHz steps.**
- **Odd split, any frequency TX or RX, in memory channel "0."**
- **Nine types of scanning!** Including new **"seek scan" and priority alert.** Also memory channel lock-out.
- **Intelligent 2-way battery saver circuit extends battery life.** Two battery-saver modes to choose, with power saver ratio selection.
- **Easy memory recall.** Simply press the channel number!
- **12 VDC input terminal for direct mobile or base station supply operation.** When 12 volts applied, RF output is 5 W! (Cable supplied!)
- **New Twist-Lok Positive-Connect™ locking battery case.**
- **Priority alert function.**
- **Monitor switch to defeat squelch.** Used to check the frequency when CTCSS encode/decode is used or when squelch is on.
- **Large, easy-to-read multi-function LCD display with night light.**
- **Audible beeper to confirm keypad operation.** The beeper has a unique tone for each key. DTMF monitor also included.
- **Supplied accessories:** Belt hook, rubber flex antenna, PB-2 standard NiCd battery pack (for 2.5 W operation), wall charger, DC cable, dust caps.

Optional Accessories:
• PB-1: 12 V, 800 mAH NiCd pack for 5 W output • PB-2: 8.4 V, 500 mAH NiCd pack (2.5 W output) • PB-3: 7.2 V, 800 mAH NiCd pack (1.5 W output) • PB-4: 7.2 V, 1600 mAH NiCd pack (1.5 W output) • BT-5 AA cell manganese/alkaline battery case • BC-7 rapid charger for PB-1, 2, 3, or 4 • BC-8 compact battery charger • SMC-30 speaker microphone • SC-12, 13 soft cases • RA-3, 5 telescoping antennas • RA-8B StubbyDuk antenna • TSU-4 CTCSS decode unit • VB-2530: 2m, 25 W amplifier (1-4 W input) • LH-4, 5 leather cases • MB-4 mobile bracket • BH-5 swivel mount • PG-2V extra DC cable • PG-3D cigarette lighter cord with filter

Complete service manuals are available for all Kenwood transceivers and most accessories. Specifications and prices are subject to change without notice or obligation.

KENWOOD

KENWOOD U.S.A. CORPORATION
2201 E. Dominguez St. Long Beach, CA 90810
P.O. Box 22745, Long Beach, CA 90801-5745

QRX . . .

EDITED BY LARRY LEDLOW, JR. NA5E

AMSAT Phase 3C

OSCAR 13 may well be a reality by the time you read this. Prospects for an on-schedule launch of the latest Phase 3 hamsat looked great at press time. A successful launch of Ariane mission V-21 on March 11 set the stage for missions V-22 and V-23 in May. If V-22 is launched according to plan, V-23 will carry Phase 3C, METEOSAT, and PANAMSAT alofton May 26.

AMSAT will release Phase 3C for general use after a three or four week checkout period.

DXers' Delight

The peak of the current solar cycle could occur much earlier than expected, according to Dr. Patrick McIntosh, Director of Solar Physics Research at NOAA's Space Environment Laboratory in Boulder, Colorado. No doubt many hams have observed the good band openings during the past spring. Dr. McIntosh suggests that if current trends continue, the solar peak could be the most intense ever recorded, surpassing even the legendary 1957 maximum!

Dr. McIntosh warns that solar predictions are risky business, but he bases his predictions on three factors: the total number of sunspots and sunspot clusters; the rate of increase of 10cm band noise; and the progression of "solar crowns," areas of intense magnetic fields, towards the solar poles.

If the scientist's prediction are correct, the next solar peak could occur as early as the end of 1988 instead of 1992.

Calling All Cars

Bill Gardner W8WG has proposed direct communications with police systems for amateur radio operators. In his recent proposal to the FCC, Mr. Gardner outlined two systems that would allow cross-service communications.

His first system would allow cross-band operation, in which both hams and police transmit on their assigned frequencies but monitor each other with "scanner receivers." The other system would establish "National Police Box Frequencies" near the edge of the ham bands (29.690, 50.005 or 52.005, 147.99, and 449.975 MHz), on which police could communicate directly with hams. The latter proposal would require a change to Part 97 to allow police access to amateur frequencies.

Part 97 Rewrite

The FCC has proposed to reorganize Part 97, the rules governing the Amateur Radio Service. Part 97 has not been rewritten since 1951, and the Commission wishes to clarify and update the "patchwork quilt" of rules. Many technology and operational changes have occured since the last reorganization of the rules, and the FCC proposal would clarify and modernize the regulations. The actual text of this Notice of Proposed Rule Making is nearly 90 pages long. The deadline for comments on PR Docket 88-139 is August 31.

No Changes to Access Charges

The FCC has quietly scrapped its plan to increase telephone rates for computer users. According to the *Wall Street Journal*, the Commission notified members of Congress that it would no longer pursue its plan to increase computer network access charges by as much as $5.50 per hour. Computer users across the nation had opposed the proposed move, which represented a potential increase in connect charges of 100 percent or more. Information service companies like Compuserve, GEnie, Delphi, and BIX also opposed the proposal, claiming the steep access charges would have put them out of business.

The decision to drop the rate increase proposal came shortly after Rep. Edward Markey (D-Mass.), chairman of the House Telecommunications Subcommittee, said he would introduce legislation to kill the access charges. The FCC also received about 10,000 letters from computer users opposing the move, a record number of comments for a telephone issue.

The FCC will continue a separate effort to assess charges of $4.50 per hour per user to hook up private telephone networks to local systems.

Senior Ham Recruitment

The ARRL has targeted non-hams aged 50 and over for recruitment into the hobby of amateur radio. A pilot program in the Tampa/St. Petersburg, Florida, area will commence this summer. In an effort to interest more retirees in ham radio, the program will primarily recruit new hams from senior citizens' organizations. If the pilot program proves successful, a nationwide effort will follow.

Data Convention

The Radio Society of Great Britain invites participants and lecturers to the RSGB Data Convention on July 22–23. As part of their 75th anniversary celebration, the Society has organized this two day event for all hams interested in various aspects of digital data transmission and reception. The convention will be held at the Harrow School, Harrow-on-the-Hill, Middlesex. Speakers from Europe and North America will make this a truly interesting meeting, perfect for beginners to experts. For more information, contact Smudge Lundegard, Saxby, Botsom Lane, West Kingsdown, Sevenoaks, Kent TN15 6BL England, or call his office at 011-44-322-613121.

Silver Anniversary

This year is the 25th anniversary of the International Mission Radio Association, Inc. (IMRA). IMRA was founded in 1963 by 50 amateur radio operators—all of them brothers and priests in a Capuchin seminary in Hudson, New Hampshire. It has grown to include not only Catholic missionaries on overseas assignments, but laity and missionaries of all denominations. IMRA hams have offered emergency help and consolation to people whose lives have been ravaged by natural disasters. The ecumenical association's 800 ham operators regularly pass traffic to and for people in remote parts of the world.

FT-727 Dual Band HT

There has been an enthusiastic response to the December 1987 *73 Magazine* product review on the Yaesu FT-727R. Those wishing more information on the 727 should call Bryan Hastings, the author of the review, at the *73* Editorial Offices, as he is often not able to answer correspondence as quickly as he would like! The phone number is (603) 525–4201, Ext. 554.

Muchas Gracias

to this month's QRX news contributors. They are *Westlink Report*, *W5YI Report*, *AMSAT Bulletin*, *Connect International*, *ARRL Letter*, *The Christian Century*, and the *Wall Street Journal*.

73 Magazine welcomes any and all news items and photos of interest to hams. Please send them to the magazine at WGE Center, Peterborough NH 03458-1194. Attn: QRX.

For the Finest in 220 MHz Repeaters, Go with the Leader—

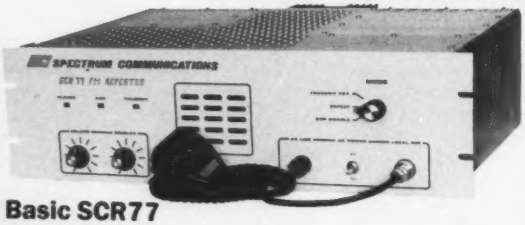

Basic SCR77

SPECTRUM

We've got the greatest design/performance "Know-how"—14 years in the business—with constant improvements in our Repeaters & Link Units!

Shown in optional cabinet.

Call or write today for details and prices!
Get your order in A.S.A.P.!
Sold Factory Direct or through Export Sales Reps. only.

For that new 220 MHz Machine—
Spectrum now makes 3 lines of VHF Repeaters—the world famous Deluxe SCR1000A, the Low Cost line of SCR77s, and the State of the Art Microprocessor Controlled SCR2000X Line of Repeaters!

The SCR77 Repeaters maintain the quality of design, components and construction which have made Spectrum gear famous *throughout* the world for years. However, all of the "bells & whistles" have been eliminated—*at a large cost savings to you!* The SCR77 is a real "workhorse" basic machine designed for those who want excellent, super-reliable performance year after year—*but no frills!*

Of course, if you do want a Full Featured/ Super Deluxe Repeater with full panel metering and controls, and a complete list of 'built-in' options, then you want our SCR1000A or the SCR2000X.

All three available with: Autopatch/Reverse Patch/Landline Control; TouchTone Control of various repeater functions; 'PL'; "Emergency Pwr./ID"; Tone & Timer Units; Sharp RX Filters; Power Amps; etc. (2M & 440 MHz Rptrs. and RF Link Units also available.)

Complete Line of VHF/UHF Rcvr. & Xmtr. Boards & Assys. also available. Plus ID, COR, DTMF Control Bds., Antennas, Duplexers, Cabinets, etc. Inquire.

SPECTRUM COMMUNICATIONS CORP.

1055 W. Germantown Pk, S10 • Norristown, PA 19403 • (215) 631-1710 • TELEX: 846-211

CIRCLE 51 ON READER SERVICE CARD

Flip-Flops and Latch Circuits

Practical flip-flop and latch circuits to build, test, and use.

by L.B. Cebik W4RNL

Why Know Flip-Flops and Latches?

The flip-flop is one of the most versatile chips in the entire digital IC family. "Flip-flop" is actually the name of a circuit configured in many different ways; for example, with transistors or gate chips. A more formal name for the circuit is the bi-stable multivibrator. The more informal name reflects the fact that modern ICs add special features to the basic circuit to make it even more flexible. It's possible to clock in data, preset the outputs, clear the outputs, and feed the output back to the input. These features allow the creation of many useful circuits.

There are many good sources of information on the basic theory of the flip-flop in its many forms. Lancaster's *Cookbooks* devote entire chapters to fundamental flip-flop operation. Times have changed since the publication of this information. Digital families now have hundreds of members, many of which perform special functions that, at one time, had to be configured with several gate and flip-flop chips. In today's world, it's necessary to know what functions basic flip-flops perform best and how to use that knowledge in selecting more complex chips tailored to special needs. Therefore, there will be little theory here.

This discussion will mainly look at practical circuits and see how hams can apply them to their designs. Some of the jobs basic flip-flops still do best are switching, dividing by two, making controllable shift registers, and controlling circuit functions. This is not all the work fit for flip-flops, but it provides an appreciation of their versatility.

Related to the flip-flop in most data-book listings is the latch. Although somewhat different in internal circuitry and function, the latch also holds a piece of data and controls circuit functions. This presentation will com-

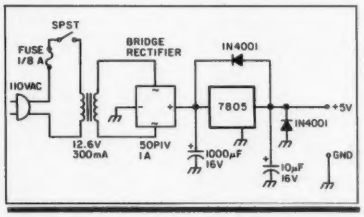

Figure 1. 5-volt test power supply.

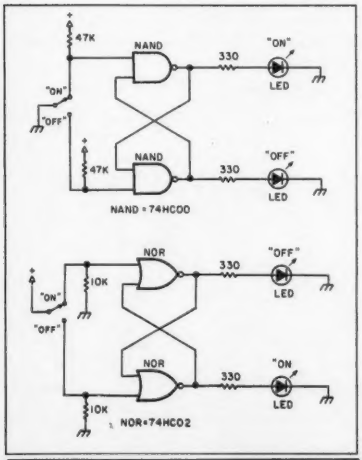

Figure 2. NAND and NOR flip-flop switches.

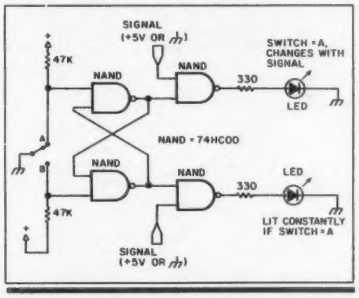

Figure 3. NAND flip-flop controlling pass/block gates.



Figure 4. LED indicator symbol to simplify drawings.

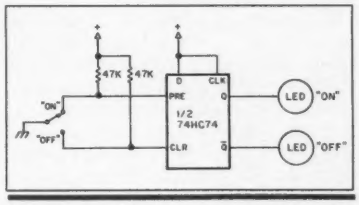

Figure 5. Flop-flop chip used as a debounced switch.

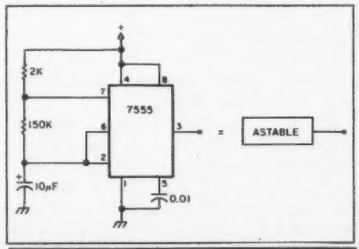

Figure 6. A handy source of slow pulses.

pare and contrast latches and flip-flops, and show which differences will make ham circuits work better.

Materials

First is an experimenter's board or IC breadboard for the tests. Second is a power supply. The simple 5-volt supply in Figure 1 will handle all the experiments. Be sure to use a heat sink on the 7805 regulator. Also, do not forget the fuse. The power supply and experimenter board make up a useful package both for this exercise and for future experiments.

Third, a small collection of parts. Four or five 74HC74 D-type flip-flops, a couple of 74HCOO NAND gates, a pair of 74C02 NOR gates, a 74HC75 latch, a few LEDs, a handful of 330Ω, 10kΩ, and 47kΩ resistors, plus some specific parts for some handy test modules will fill the bill. No soldering will go on here, since these parts will later go into real projects.

"In today's world, it's necessary to know what functions basic flip-flops perform best and how to use that knowledge in selecting more complex chips tailored to special needs."

The Basic Flip-flop

Figure 2 shows a pair of basic flip-flop circuits made from gates. As the two diagrams show, either a pair of NANDs or a pair of NORs will work fine. Because the output of one gate feeds back to an input of the other, briefly changing the rest state of one of the control lines can switch and latch the output state. Not only does the output change when the input changes, it stays that way after releasing the switch or whatever pulse system used to affect the control inputs.

This fact is useful, because it gives a debounced switch, one that does not show any of the make-break problems of mechanical switches. Figure 2 shows how to use the flip-flop with mechanical switches at the input. The rotary or toggle switch switch should be a break-before-make type, since during the brief period that the switch is disconnected between positions, the flip-flop output will remain as it was left. It changes to its new state with the first touch of the switch contacts, and it stays that way, no matter how many times the switch contacts make and break before settling into their final position. The resistors on the control input lines hold the control inputs HI or LO (as needed) when the switch is not reversing them.

The Xs in the input lines show the points where it's possible to remove the mechanical switch and resistors in order to feed control signals directly to the inputs. This mode of operation requires signals always present at the inputs as either HIs or LOs. If a no-signal condition is desired (e.g., following a tri-state buffer) then one should keep the pull-up or hold-down resistors on the control input lines.

The two basic flip-flops in Figure 2 use 74HCOO and 74HCO2 gates. It's possible to substitute regular CMOS NAND and NOR gates (with changes of pin numbers) and use the same value resistors. If using 7400-series TTL ICs or 74LSOO-series low-power TTL ICs, check the manuals for proper pull-up and hold-down resistors. However, since the 74HCOO-series combines the best features of both the 4000-series CMOS ICs (except for the wide range of operating voltages) and the 74LSOO-series, I will use them throughout these experiments.

Versatility

Notice that the flip-flop has two outputs. They are conventionally called Q and −Q, since one is always the reverse of the other. When changing a control input, both outputs change together. This feature is very useful, because some complex circuits may require a HI in one place and a LO in another, with both conditions reversed for the off, inactive, or opposite condition. Figure 3 shows an example, using gates as passing/blocking elements for pulses. When gate 1 passes, gate 2 blocks, and vice versa. The output from the flip-flop tells the gates whether to pass or block. Note that it's possible to use a single gate IC with four gates per chip to create this entire circuit. When there are unused gates and the builder needs only a control switch, the simple flip-flop is often the best way to go.

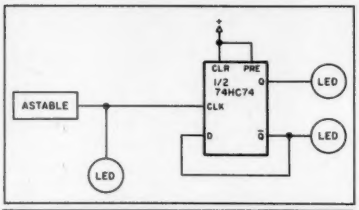

Figure 7. Basic divide-by-2 flip-flop circuit.

In Figures 2 and 3, LEDs with series 330Ω resistors are indicators. Figure 4 shows how the remaining diagrams will represent the LED indicator. By using the simplified symbol, the reader can keep his attention focused on the important aspects of the test circuit. As a convention, the LED will indicate a HI condition. When the LED is off, a LO is present. As I proceed, I shall represent some other useful test circuits in the same way.

One can do the same basic switching job of Figure 4 by using one of the designated flip-flop ICs, such as the 74HC74 D-type flip-flop shown in Figure 5. For the moment, ignore the Data and Clock inputs by tying them to the positive supply voltage line. For this chip, the Preset and Clear inputs are the control lines that correspond to those in the gate flip-flop circuit. Then take the Preset input LO to make Q HI and −Q LO, and take the Clear

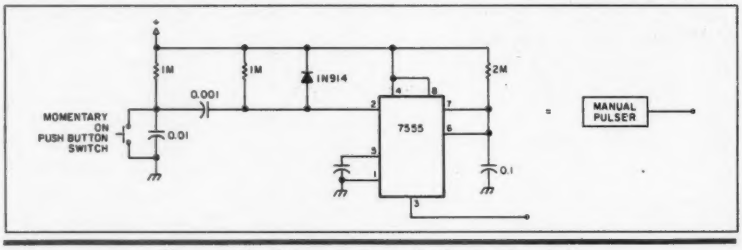

Figure 8. A handy manual pulser (pulse duration ⅓ second).

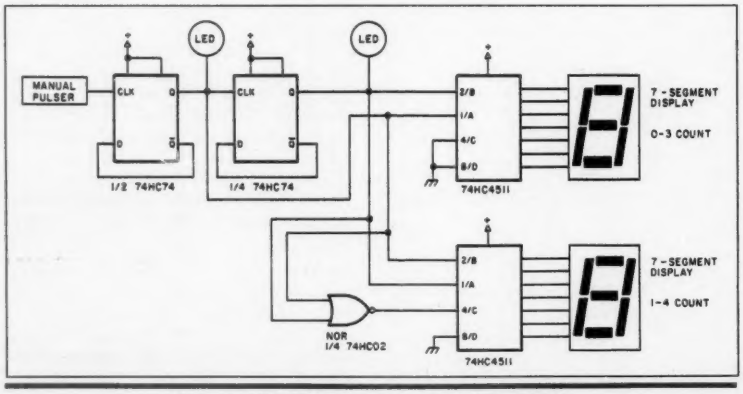

Figure 9. A flip-flop binary counter-controller-indicator.

line LO to make Q LO and −Q HI. Since the 74HC74 has two flip-flops per chip, only half a chip is used, just as the gate version of the switch.

There are other kinds of flip-flop chips, such as the J-K models, and there are multiple flip-flop chips with many individual circuits, but restricted control features. Rather than entering the confusion of trying to track many different kinds of ICs, I'll stick with the 74HC74 so the reader can try to master most of its capabilities. Then the reader can apply the lessons learned to almost any of the other variations.

Flip-flops as Dividers

The D-type flip-flop provides additional circuitry for clocking data into the chip. A pulse source will help make use of this circuitry in these experiments. The astable circuit in Figure 6 uses a 7555 to produce pulses with about a 1 second on-time and a 1 second off-time. The 74HC00-series chips here can handle frequencies well above 10 MHz, but this slow pulse rate allows the reader to see the circuit operation more clearly.

To use the Data and Clock inputs of the 74HC74, hold the Preset and Clear lines HI. Next, we must place the data (a HI or a LO) at the Data input. Finally, place a LO-to-HI transition on the Clock input line. The first step is normally done when wiring the circuit, as in Figure 7. Then, whatever the state of the Data line, when the clock goes from LO to HI, the D-state will appear at the Q output and its opposite will appear at the −Q output.

However, Figure 7 shows the −Q output wired back to the D input. The circuit also shows the 7555 astable circuit feeding pulses to the Clock input. Take a close look.

Assume that Q is LO and −Q is HI. This means that D is also HI. When the Clock pulse goes from LO to HI, the HI on D appears at Q. Then −Q goes LO, which means that D also goes LO. But nothing will happen to D's LO until the next Clock pulse changes from LO to HI. With this second pulse, Q goes LO and −Q goes HI, feeding D a HI. This cycle continues. Note that the Q and −Q outputs make one complete pulse for every two pulses from the 7555. The circuit divides the frequency of the astable by 2.

The divide-by-two circuit is very useful. Sometimes an experimenter needs both the original frequency and another frequency half as fast. In many applications, the tester can start the astable at twice the desired frequency, and use the divider circuit to bring it to just the desired value. Remember that in the 7555 circuit, the HI and LO durations are not exactly equal. If equal on and off times are important (e.g., in coded systems), the divider circuit guarantees equality.

Simple Counter

A builder can make a simple binary counter and controller by stringing together divider circuits. To operate this circuit, let's make a debounced manual pulser. Figure 8 shows a good circuit, again using the 7555. The input resistors and capacitors to the trigger pin simply guarantee that there is one pulse per finger press on the switch. I use some extra keyboard switches pulled from a defunct project for this work. Keyboard switches are among the best press-release switches available. Incidentally, I keep two or three prewired perfboard versions of both the pulse circuit and the astable circuit close at hand and just plug connecting wires into the breadboard. In the long run, that saves a lot of time.

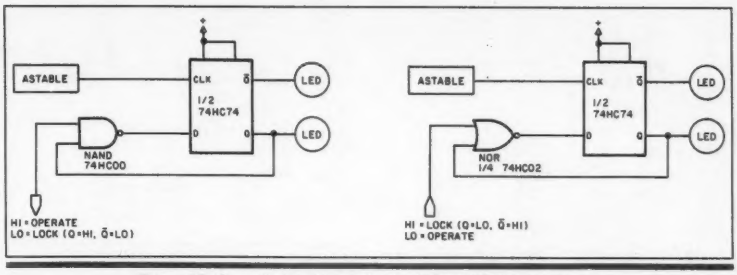

Figure 10. Controlled dividers using NAND and NOR control gates.

Figure 9 shows an example of a simple binary counter using two flip-flops in series. This starts with a debounced pulser. Note that there are four LEDs connected to some gates as a substitute for a controlled circuit. There are up to four pass/block gates or any other type of circuits among which to switch. When pressing the button, the next LED lights—or the next circuit becomes operative—with all the others off.

At the same time, a binary number between 0 and 3 is created, using the Q outputs of the two flip-flops. The experimenter can place these two outputs on the 1 and 2 inputs of a BCD driver chip that feeds a 7-segment display.

Now wire the 4 and 8 inputs low. The result is a display that reads 0-1-2-3 when pressing the button, indicating the number of the activated circuit. Figure 9 also shows some optional additional circuitry to allow the 7-segment display to read from 1 through 4. The NOR gate simply converts the flip-flop LO-LO = 0 into a HI to trigger the 4 digit.

This basic circuit is useful to about one more place for counting up to eight and controlling one of eight circuits manually. However, beyond eight, there are many more flexible binary and BCD counters, as well as programmable divide-by-N counters. There are decade counters (74HC160), dual decade counters (74HC390), 4-bit binary counters (74HC161), dual 4-bit binary counters (74HC393), divide-by-10 counters (74HC4017), up/down counters (74HC191), and 14-bit counters with a built in oscillator (74HC4060). They are all based on flip-flops, but that circuitry is buried inside the chip. One needs only to master the input and output connections and any special rules of operation to use them.

For example, some counters count on a LO-to-HI transition of the Clock input, others on the HI-to-LO transition. Most have Reset lines that instantly return the count to zero, but some need a HI to do the job, and others need a LO. When checking out these counters in data books, be sure to read all the rules.

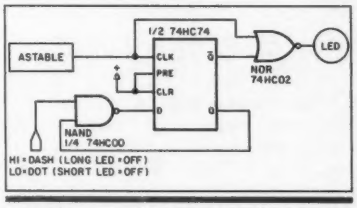

Figure 11. A controlled flip-flop divider for making Morse dashes from dots.

Controlled Dividers

So far, the divide function of D-type flip-flops have been used in an uncontrolled manner, dividing all the time. However, by adding a gate, it's possible to control just when the circuit divides. Figure 10 shows two controlled dividers, using NAND and NOR gates. Which one the experimenter uses depends upon the gates available in his circuit and whether he wants to control the process with a HI or a LO. Since the gate will reverse the level of the feedback signal, he feeds the Q output to the gate (instead of the −Q output).

Figure 11 shows an application of the controlled divider circuit to make Morse code dashes from dot pulses. When the NAND gate input is LO, its output to the D terminal is HI. The clock pulse will make Q HI and −Q LO. Since −Q goes to the NOR gate, the LO permits the gate to pass (inverted) whatever comes in the other input line. In this case, what passes are dot pulses.

When the NAND gate input is HI, its output to the D input will be the inverted Q output. If Q is HI, D is LO. The next clock pulse will make Q LO and −Q HI (with the D input seeing a HI). The −Q HI hits the NOR input and holds its output LO during both the HI and the LO part of the original clock pulse.

Now, with the start of the next clock pulse, the HI D input transfers to Q, with −Q going LO. Thus, one gate of the NOR is LO, allowing the dot pulse to pass as a dot. The result is a NOR output LO three times as long as a dot LO, while the space time (HI) is the same length as usual. By summing the dot pulse and the divider pulse, it makes perfect dashes.

Combine Figure 9 and Figure 10 elements to create a divider-controller-counter that operates only under certain conditions fed to a divider-controller gate. The possibilites are endless!

Next time: Shift register circuits.

Opening Doors for Kids

A unique classroom program in NYC

by Carole Perry WB2MGP

Seven years ago when I began "Introduction to Amateur Radio" as a course at Intermediate School 72 in Staten Island, New York, I couldn't have known the extraordinary success we would have with the children. There was no way of anticipating the tremendous parental and community support this course would inspire.

Since its inception, over 4500 students have come through this unique program. I teach ten classes each term with approximately 35 youngsters per class in sixth, seventh, and eighth grades. A large percentage of them have received licenses; all of them have left with a better feeling about themselves, having learned new skills and having been exposed to an incredible hobby. Most children going through the school system today do not have the opportunities that are available to the children in this program. In fact, when the course is over, a whole new world opens up to the youngsters.

Photo A. Carole Perry WB2MGP and her QSL.

Not a Grind

Instead of "grinding out" Novices and ramming technical jargon and formulas down the children's throats, I use ham radio to motivate the students in all other areas of the school's curriculum. Probably no other hobby can offer the multiplicity of facets to use as motivational tools in a classroom. The philosophy is to have fun and to see that having fun can mean using the radio in an intelligent and responsible manner to learn more about the rest of the world.

I always encourage the youngsters to study at home with a parent or with a sibling. Parents love the idea of sharing something new and interesting like ham radio with their children. They are always very supportive of our program.

"My special thanks to Mrs. Carole Perry for creating a program that bought my son and me closer together. Studying and being tested together was fun, and we're now both in the fantastic hobby of ham radio," wrote Mrs. Marilyn Aronson KA2SXC, mother of Michael Aronson KA2RNP.

Remarkable Progress

What is the most wonderful thing about a program like this? The course has something for everyone. Non-English speaking children have made remarkable progress in learning to speak English because of the skills involved for the telegraph key. After all, CW is a new language for everyone. So everyone in the class starts out on equal footing.

Bright students need to be challenged with exciting and stimulating material. Most of them are overstimulated by the various media to which they are exposed in conventional classroom studies, and they are underworked. Most do not want to work hard to be successful in school. Ham radio offers endless possibilities for the good student. In an age where computers are becoming a household item, these kids are delighted to learn about packet radio. I am quick to point out that hams have obvious advantages for career choices in electronics, computers or communications.

Even more "reluctant learners" recognize that they have a chance to be successful at something for the first time in their school careers. They learn to be responsible and careful in handling the equipment. They may discover skills they have in anything from soldering to designing a creative QSL card. It's my job to keep the motivation high and to make sure that every child succeeds at something.

Even though we have a Novice license pass rate of 75 to 80%, it's not the main objective of the course. My philosophy is to show the students a new and exciting way to learn things in school and to be aware of this most unusual hobby. Who knows? Someday these youngsters may be married to ham radio operators (heaven knows that requires a lot of understanding) or that they might be voting on antenna ordinances. It's important that they learn about amateur radio in a positive and responsible manner.

Photo B. A few hams from Rocci Laurie School.

Helping Others

One of the units I teach in the program deals with "Handi-Hams." This is a great opportunity for a teacher to expose the children to some of the spirit and determination hams are known best for. Joe Schwartz K2VGV is a local operator who has been very supportive of our program. Joe is a double

amputee who spends a good deal of his time in the hospital. That hasn't stopped him from making a real impact on the kids. He has invited the children from my classes to his home so he can spend time with them, one on one, showing them radio procedures. Parents go along with their children and are exposed to the wonders of ham radio as well. As anyone will agree, the children are learning more than just radio when they sit with Joe. Handi-Hams working with youngsters reflect all that is the true spirit of our hobby.

One thing I enjoy most about what I do is observing what transpires when my retired ham radio friends come to the classroom to work with the youngsters. They enrich us all by sharing their experiences and expertise with us. The children benefit manifold from these contacts, and so do the retired hams. These are human values being reenforced along with radio skills. How do you beat the winning combination of youth and curiosity coupled with the wisdom and experience of age? I've spoken with many chapters of the New York, Long Island, and New Jersey Quarter Century Wireless Association, and they have always expressed a willingness to help out with my kids.

Photo C. A variety of QSLs made by the student's.

The Next Step

About a year or so ago, I realized we had a real problem of providing a "next step" for the children who had their licenses but were no longer in my program. We lose too many Novices once they get out of "my nagging range." Ham radio is a hobby that thrives on human contact. There were just too many of these Novices out there for me to handle properly. So we began a night class at our school, taught by volunteers from the local radio clubs. It was available to parents and members of the community as well as to the children for upgrading purposes. Because of the night classes and the devotion of many Staten Island ham friends, we've managed to get about a 7–10% upgrading average.

This past spring we planned a huge reunion at a local college. For one whole day, there were exhibits and demonstrations in amateur radio for all ex-students and anyone else who's interested in learning about our hobby. We also provided services for license renewal in an attempt to get former students back into the fold.

Special Contact

On August 1, 1985, amateur radio gave me a chance to help hundreds of children and community members to participate in a once-in-a-lifetime opportunity: to contact an astronaut. For many months the children learned about space travel, NASA's objectives with space shuttles, and radio communications in space. Hundreds of hams from Staten Island and New Jersey donated endless hours of their time and expertise to help make the contact a success. The local TV and radio stations were there at our school to root us on and to record the event for the news that night. The highlight of the day came when we received astroham Tony England's (W0ORE's) picture on our school's TV monitor via slow scan TV. The entire event is still talked about with pride in our school and community.

Another nice project we've recently gotten involved in is to check into a Florida/NY net early in the morning on 20 meters. The children love identifying the "regulars" by their voices and then by their call signs. The youngsters have invited the hams from the Carolinas and Florida to visit our school when they come up North. We're all looking forward to that. We've already been fortunate enough to have a ham from Italy come to visit us in our classroom. When Dr. Giorgio Beretta I2VXJ spent the day with us, he provided us with some first hand insights into ham radio in Italy.

Our ham radio newsletter, *The Ragchewer*, gives each child a chance to contribute something and to get to see their names in print. The children do all the artwork, articles, interviews, and publishing themselves. The entire school enjoys the publication.

The next edition of *The Ragchewer* will include an article about Brother Joe AC1U from St. Anthony's in Elizabeth, New Jersey. He has provided my class with a videocassette about the IMRA (International Missionary Radio Association) and has helped to introduce yet another aspect of amateur radio into our classroom.

Photo D. A touch of class.

New Horizons

By emphasizing the human side of our hobby, I hope to provide the children with the key they will need to open the door into the most exciting and diversified hobby and service that exists today. 73

gms 403

FOUNTAIN of YOUTH for NiCad BATTERIES

- Automatically erases memory and rapidly charges NiCad batteries up to 15 Volts.
- Allows batteries a long life with maximum capacity.
- Helps restore a tired battery.
- Full 2 year warranty.
- Cost effective, saves money.
- Ponce de León never had it so good.

Control Products Unlimited, Inc.
5 Somerset Dr., Coatesville, PA 19320
(215) 383-6395

THE PX SHACK Inc.
52 STONEWYCK DR.
BELLE MEAD, N.J.
(201) 874-6013 08502
HOURS: 10AM-3PM ORDERS
7PM-10PM TECH.

TONNA ANTENNAS

50-5el	$109	432-4x21H	$466
50-7el	$TBE	220-5el	$55
144-4el	$55	220-11el	$81
144-2x4	$67	220-19el	$129
144-2x9	$111	902-23el	$67
144-9port	$77	902-4x23H	$365
144-9fix	$75	1296-23el	$67
144-13el	$83	1296-4x23H	$365
144-17el	$129	1255-23ATV	$67
435-9el	$67	1296-55el	$99
435-19el	$77	1296-4x55H	$489
432-21DX	$92	2304-25el	$89
438-21ATV	$92	POWER DIVIDERS	
435-2x19	$85	144,220,432,902 1296,2304mHZ	

TRANSVERTERS

MICROWAVE MODULES

MMT50/144	20w 2m I.F.	$489
MMT50/28S	20w 28mhz I.F.	$489
MMT144/28	10w 28mhz I.F.	$259
MMT144/28R	25wGaAsFET/DBM	$489
MMT220/28S	15w 220-25	$279
MMT432/28S	10w W/OSCAR	$369

CIRCLE 29 ON READER SERVICE CARD

MADISON SHOPPER

CALL FOR ORDERS
1 (800) 231-3057
1-713-520-7300 OR 1-713-520-0550
TEXAS ORDERS CALL COLLECT
FAX 1-713-771-7759
ALL ITEMS ARE GUARANTEED OR SALES PRICE REFUNDED

New Icom IC 781 ..... Trades wanted
Kenwood TH215A, TH25AT ..... Trade in your old HT

Kenwood TS 140S ..... Call for trade
New Kenwood TM-221A, 45W, mobile ..... Call
ICOM 28H/TTM 410.00

Icom 761 ..... 2300.00

Shure 444D 54.95
HEIL BM10 Boom Mike 69.00
HEIL HM5 Desk Mike 59.00

Isopole 144 MHz 44.95
Cushcraft 124-WB (146 MHz) 33.00
Butternut HF6V, 80-10 vertical 125.00
Hustler G7-144 ..... 119.95
KLM KT-34A 399.00
NEW KLM 1,2-44LBX 129.00
G5-RV 44.00

Larsen 2-meter on glass 49.95
New Larsen LM 490 CO 5.00
Anteco 2M, 5/8, Mag. Mount, Comp 25.00

Thousands of panel meters ..... 3.95 up CALL
8560A 95.00
Aerovox 1000 pf/500 V feedthrough caps 1.95
Transformer 120 V Pri., 1050 V/1A. (Sec. #18 Wire) 50.00
100 mfd/450V Axial Cap 2.00

831SP-PL259 Silverplate 1.25
82-61 N Male 3.00

GE 6146B 13.95
3-500Z 140.00
GE 12BY7A 7.00
6MJ6 ..... 12.95
6KD6 ..... 12.95
Cetron 572B 88.00
6JB6A 9.95
8950 ..... 18.00

AEA PK-232 with new WX FAX 299.00
Kantronics KPC II 149.00
AEA Packet Terminal ..... Call
Kantronics KAM/WX 299.00

USED EQUIPMENT
All equipment, used, clean, with 90 day warranty and 30 day trial. Six months full trade against new equipment. Sale price refunded if not satisfied.
Call for latest used gear
(800) 231-3057
TS-430S, TS-830S, TS-520S, FT101E, and Collins
Porcelain 502 Guy Insulators (1/4) 3.39

POLICIES
Minimum order $10.00. Mastercard, VISA, or C.O.D. All prices FOB Houston, except as noted. Prices subject to change without notice. Items subject to prior sale. Call anytime to check the status of your order. Texas residents add sales tax. All items full factory warranty plus Madison warranty.

Bird and Belden products in stock. Call today.

MADISON
Electronics Supply
3621 FANNIN
HOUSTON, TEXAS 77004

CIRCLE 25 ON READER SERVICE CARD

Performance Above and Beyond

AR2002

Continuous Coverage Professional Scanning Monitor Receiver
25 – 550 MHz/800 – 1300 MHz

Specifications:

Receiving mode – Narrow band FM, Wide band FM & AM
Receiver circuit – Microprocessor controlled PLL Frequency synthesized superheterodyne type with high-level doubled balanced mixer
Receiver IF – 750MHz, 45.03MHz, 5.5 MHz (WFM) and 455kHz (NFM & AM)
Sensitivity – NFM – 0.35 uV (12dB SINAD)
WFM – 1.00 uV (12dB SINAD)
AM – 1.00 uV (10dB S/N)
Selectivity – NFM – ±7.5kHz @ 6dB
±20kHz @ 70dB
WFM – ±50kHz @ 6dB
±250kHz @ 60dB
AM – ±5.0kHz @ 6dB
±10kHz @ 70dB
Number of memory channel – 20 Channels
Scan rate – 9 channels per second
Search rate – 6 seconds per MHz
Antenna connector – Standard BNC type, 50 ohm
Audio output power – 1 watt @ less than 10% TH
Power requirement – 12Vdc 540mA at 200 to 2800

AR2002
Professional Monitor Receiver
$499.00
(California res. add $29.94 tax)
Visa and MasterCard orders welcome
Prices include shipping & handling
Except UPS. C.O.D. is $3.00 extra
Purchase orders accepted from Government agencies

22511 Aspan Street, Lake Forest, CA 92630-6321
Calif/Alaska (714) 581-4900
Facsimile (714) 768-4410 (not a phone)
TOLL FREE 1-800-523-6366

ACE communications

CIRCLE 279 ON READER SERVICE CARD

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 30 PETERBOROUGH, NH 03458

POSTAGE WILL BE PAID BY ADDRESSEE

73 AMATEUR RADIO

P.O. Box 931
Farmingdale, NY 11737-9631

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 30 PETERBOROUGH, NH 03458

POSTAGE WILL BE PAID BY ADDRESSEE

73 AMATEUR RADIO

P.O. Box 931
Farmingdale, NY 11737-9631

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 30 PETERBOROUGH, NH 03458

POSTAGE WILL BE PAID BY ADDRESSEE

73 AMATEUR RADIO

P.O. Box 931
Farmingdale, NY 11737-9631

☐YES, I could use a little excitement in my hobby!

SPECIAL OFFER!

Send me 12 issues of *73* for the low subscription price of $19.97: save over $15 off the cover price! (Reg. sub rate: $24.97)

NAME _____ CALL _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

☐ AE ☐ MC ☐ VISA ☐ Check Enclosed ☐ Bill me

Card# _____ Exp. Date _____

Special offer on Foreign Rate!
Canada/Mexico $27 Foreign Surface $27–1 year (12 issues)
(US funds)

Please allow 4–6 weeks for processing of first issue. Offer valid for a limited time only. 3866A

☐YES, I could use a little excitement in my hobby!

SPECIAL OFFER!

Send me 12 issues of *73* for the low subscription price of $19.97: save over $15 off the cover price! (Reg. sub rate: $24.97)

NAME _____ CALL _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

☐ AE ☐ MC ☐ VISA ☐ Check Enclosed ☐ Bill me

Card# _____ Exp. Date _____

Special offer on Foreign Rate!
Canada/Mexico $27 Foreign Surface $27–1 year (12 issues)
(US funds)

Please allow 4–6 weeks for processing of first issue. Offer valid for a limited time only. 3866A

☐YES, I could use a little excitement in my hobby!

SPECIAL OFFER!

Send me 12 issues of *73* for the low subscription price of $19.97: save over $15 off the cover price! (Reg. sub rate: $24.97)

NAME _____ CALL _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

☐ AE ☐ MC ☐ VISA ☐ Check Enclosed ☐ Bill me

Card# _____ Exp. Date _____

Special offer on Foreign Rate!
Canada/Mexico $27 Foreign Surface $27–1 year (12 issues)
(US funds)

Please allow 4–6 weeks for processing of first issue. Offer valid for a limited time only. 3866A

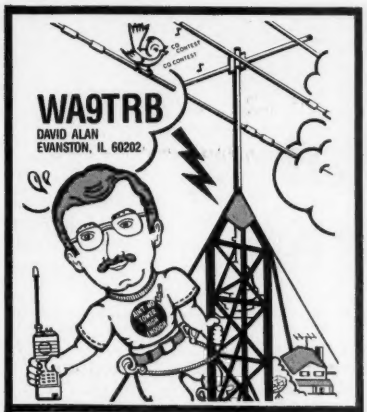

—GET MORE DX WITH THIS TOWER—

Finally a 200 ft. tower you can afford, and climb in any weather. Your neighbors will love it!

This original, personalized 8×10 black and white caricature comes "factory assembled", in a heavy acrylic frame ready to hang in your shack. Allow 4-6 weeks for delivery.

Just a clear close-up photo will allow us to put your face on the tower. Also include your call sign, name, address and a check for $35.00 made out to:

DAVID ALAN GRAPHICS
P.O. BOX 35
BATAVIA, IL 60510

—NO BUILDING PERMIT REQUIRED—

XYL version available
Photo will be returned, shipping included.

© Copyright 1988 David Alan Graphics

CIRCLE 321 ON READER SERVICE CARD

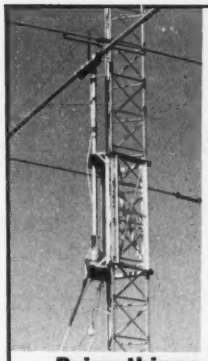

SAVE TIME and MONEY with THE HAZER

Bring things down for safety and convenience.

Never climb your tower again with this elevator system. Antennas and rotator mount on HAZER, complete system trams tower in verticle upright position. Safety lock system operates while raising or lowering. Never can fall.

Complete kit includes winch, 100 ft. of cable, hardware and instructions. For Rohn 20 and 25 G Towers.

Hazer 2 - Heavy duty alum. 12 sq. ft. load	**$297.00 ppd.**
Hazer 3 - Standard alum. 8 sq. ft. load	**$213.00 ppd.**
Hazer 4 - Heavy galv. steel 16 sq. ft. load	**$278.00 ppd.**
Ball Thrust bearing TB-25 for any of above	**$49.50 ppd.**

KENPRO Antenna Rotors

KR-400	11 sq. ft. Azimuth Rotor	$214.95 ppd.
KR-600	19 sq. ft. Azimuth Rotor	$299.95 ppd.
KR-2000	27 sq. ft. Azimuth Rotor	$549.95 ppd.
KR-5400	AZ-EL Satellite Rotor	$399.95 ppd.

Send for free details of aluminum towers specifically engineered for use with the Hazer.

Satisfaction guaranteed. Call today and charge to Visa, MasterCharge or mail check or money order.

GLEN MARTIN ENGINEERING INC.
Rte. 3 Box 322
Boonville, Mo. 65233
816-882-2734

CIRCLE 72 ON READER SERVICE CARD

• SUPERSCAF •
(A Switched-Capacitor Audio Filter)

SuperSCAF is a versatile switched-capacitor filter for eliminating interference and noise on CW, SSB, RTTY, AMTOR, PACKET and other narrow band modes. Extremely steep filter skirts remove adjacent clutter and noise to enhance weak signal reception and greatly increase intelligibility and listening comfort.

SuperSCAF incorporates a switched-capacitor bandpass filter, an economical implementation of digital filter technology. Extreme sharpness, stability, accuracy and complete freedom from ringing characterize this design approach. Bandwidth is adjustable from a minimum of 30 Hz to a maximum of 3700 Hz, allowing optimum passband tailoring under widely varying conditions. Skirt slope is 150 dB per octave (about twice as steep as a good crystal filter), and stopband attenuation is at least 51 dB. SuperSCAF is connected via the receiver's speaker or headphone output and provides 1.5 Watts to drive a 3.2 to 8 Ohm speaker. SuperSCAF operates from 105 to 130 VAC.

SuperSCAF is available as an easy to assemble kit. No adjustments, calibration, or test equipment are required. The kit can be completed by most builders in one or two evenings. SuperSCAF is available in kit form for $139.95, or assembled for $179.95. Please include $7.00 for S/H. Order from AFtronics, Inc., PO Box 785, Longwood, FL 32752-0785. Florida residents should include state sales tax.

AFTRONICS, INC.
P.O. BOX 785
LONGWOOD, FLA 32752-0785

CIRCLE 251 ON READER SERVICE CARD

FELLOW RADIO AMATEURS,

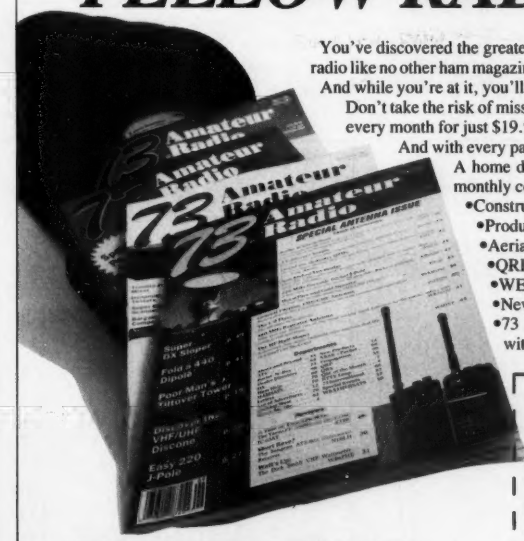

You've discovered the greatest hobby in the world. And *73 Amateur Radio* captures the excitement of amateur radio like no other ham magazine in print today. With *73*, you'll have *fun* discovering the thrills of this great hobby. And while you're at it, you'll also learn more about ham radio.

Don't take the risk of missing out on all *73* has to offer. You can have your issue of *73* delivered to your home every month for just $19.97 (12 issues)—that's 43% off the cover price!

And with every paid subscription we'll send you a FREE GIFT: a great looking *73* baseball cap.

A home delivered copy of *73* means you'll never miss out on these tremendously popular monthly columns:

- Construction projects: The most homebrew projects *anywhere*.
- Product reviews: Belly-to-belly matchups of new gear.
- Aerial View: Everything you'll ever want to know about antennas.
- QRP: For low power aficionados.
- WEATHERSATS: Get the latest fax on the weather.
- Never Say Die: And you bet I won't.
- 73 International: *73 Amateur Radio* is the only ham magazine with monthly news from every corner of the world.

SUBSCRIBE TODAY.

And remember—with every paid subscription order, you'll receive a FREE *73* BASEBALL CAP, and SAVE 43% OFF THE COVER PRICE!

☐ **YES!** I want to receive my copy of *73 Amateur Radio* at home every month. Please start my subscription immediately: 1 year (12 issues) for $19.97 and a FREE *73* BASEBALL CAP!*

Name _____

Address _____

City _____ State _____ Zip _____

☐ Bill Me ☐ Check Enclosed ☐ Charge my credit card

Account # _____

☐ MC ☐ Visa ☐ Amex Exp. Date _____

Signature _____

Offer valid for a limited time only. Canadian and foreign surface orders: $27 per year (12 issues) U.S. funds. Please allow 4–6 weeks for delivery of first issue. *Free gifts are sent to paid subscribers only.

Mail Coupon to: *73 Amateur Radio*, P.O. Box 931, Farmingdale, NY 11737–9631 7866BC

73 Review *by Larry Antonuk WB9RRT*

Ramsey D-5100 Digital Autoranging Multimeter

Ramsey Electronics
2575 Baird Road
Penfield, NY 14526
Price: $50

The VOM is the one piece of equipment that is absolutely mandatory for anyone wishing to do any type of troubleshooting. In the past, hobbyists on a budget wound up with one of the analog Radio Shack models—usable, not highly accurate, able to survive maybe one or two drops before becoming totally unreliable—and they got by. If they actually made some cash fixing something, they might get all the way to the classic Simpson 260 - accurate, tough as nails, impossible to read. Any type of digital meter was completely out of the question.

Things are a little easier these days. For a mere fifty bucks, today's tech can buy a digital meter with accuracy that makes most analog meters look shabby, with autoranging thrown in! The Ramsey D-5100 comes in a compact package. Measuring 2.5" x 1.0" x 5.0", the meter will easily fit into the messiest toolbox. The case is made of high-impact plastic (able to survive plenty of dropping!). A rotary switch selects the function and four pushbuttons determine secondary modes (AC/DC, Range, Hold, Memory). The multimeter comes with those nice rubber-like test leads, with safety banana plugs.

The meter boasts the usual specs: 1000 VDC, 500 VAC, 0–200mA or 0–10A, and 0–2MΩ. A continuity annunciator chirps when reading less than 20 Ωs and is also used to indicate range changes, overrange, etc. The autoranging feature is not lightning fast, but most readings settled down in well under a second. If the autoranging feature is not desired, a tap on the RANGE button locks the current range or allows the user to step up through the ranges. The MEM button allows the operator to subtract the current reading from subsequent readings. The HOLD button simply controls when making low resistance readings - useful mainly as a "zero" control when making low resistance readings. The HOLD button simply freezes the display; it doesn't let the operator hook the meter up, leave the area, and come back to see the highest voltage, etc. displayed. (A use for this feature has yet to come to mind.) The D-5100 will test semiconductor junctions, and has a low power ohms function for in-circuit testing.

The only weak point in this product is the instruction manual. While fairly complete, the broken English is sometimes difficult to understand. Techs new to digital meters will find a series of examples in the back of the manual that will walk them through any possible use of the instrument.

Thanks to Ramsey Electronics, what used to cost as much as a new car now costs as much as dinner for two. Keep the wife home tonight and put one of these in your toolbox. I'm sure she'll understand. 73

A better way to design and analyze Long wires, Vee's, and Rhombics.

LONG WIRE PRO

Easy to use, menu driven, select wire length, height, frequency, ground type, and get a color coded sinusoidal projection of your HF antenna. For the IBM PC and compatibles, DOS 2.0 or higher, 256K, color required.

Price $35.00

EPSILON CO
Box 715, Trumbull CT, 06611, (203) 261 7694

CIRCLE 324 ON READER SERVICE CARD

...America's Best Kept Secret!
TEN-TEC
For the serious radio operator!

PARAGON HF TRANSCEIVER, MODEL 585

MEET AMERICA'S NEWEST FULL FEATURED, SYNTHESIZED TRANSCEIVER. GENERAL COVERAGE ALL MODE RECEIVER TUNES FROM 100 kHZ TO 29.999.999MHz. TRANSMIT AT 100 WATTS OUTPUT ON ALL AUTHORIZED FREQUENCIES FROM 1.8 SSB, CW, FSK AND OPTIONAL FM. NOISE BLANKER AND SPEECH PROCESSOR ARE STANDARD EQUIPMENT. DUAL VFO'S, RX OFFSET.

List $2245.00
Sale $1995.00

(LIMITED TIME ONLY)

MISSION COMMUNICATIONS
11903 Abel-Clodine Suite 500
HOUSTON, TEXAS 77082

(713) 879-7764
Telex 166872 MCON UT

MADE IN USA

NET-KALL NK-1
DTMF ALERT DECODER



From Only **$34.95!**

- Momentary or latched output
- Multiple Group-Call response
- High stability xtal controlled SSI-202
- Ideal for an economical alert system

NK-1K (kit) $34.95
NK-1W (Wired/Tested) $44.95
(Add $2.00 Shipping/Handling in U.S.A)

MoTron Electronics *Call Toll-Free*
695 W. 21st.Ave. **1-800-338-9058**
Eugene, OR 97405 **or (503) 687-2118**

CIRCLE 127 ON READER SERVICE CARD

RAMSEY

RAMSEY ELECTRONICS

QUALITY TEST GEAR YOU CAN COUNT ON



INCLUDES 2 HOOK-ON PROBES **$369.95***

20 MHz DUAL TRACE

Features component testing circuit for resistors, capacitors, digital circuits and diodes—TV sync filter—high sensitivity—Z axis—XY mode—built-in calibrator—5X horizontal magnifier

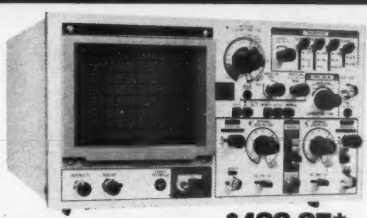

INCLUDES 2 HOOK-ON PROBES **$499.95***

35 MHz DUAL TRACE

wide frequency bandwidth—optimal sensitivity —delayed triggering sweep—hold off—ALT trigger—single sweep TV sync 5X magnification—XY or XYZ operation— HF, LF noise reduction

NEW COM-3.

$2495.00* THE COMMUNICATIONS SERVICE MONITOR THAT WORKS HARDER FOR LESS.

Introducing COM-3…the new service monitor designed by service technicians for service technicians. It works harder for less…giving you advanced testing capabilities at a very affordable price. FEATURES • Direct entry keyboard with programmable memory • Audio & transmitter frequency counter • LED bar graph frequency/error deviation display • 0.1-10,000 μv output levels • High receive sensitivity, less than 5 μv • 100 KHz to 999.9995 MHz Continuous frequency coverage • Transmit protection, up to 100 watts • CTS tone encoder, 1 KHz and external modulation

UNSURPASSED QUALITY • SUITABLE FOR HOBBY, SERVICE & PRODUCTION

MODEL	BAND WIDTH	# TRACES	CRT SIZE	VERTICAL SENSITIVITY	MAXIMUM TRIG FREQ	USEABLE MAXIMUM BANDWIDTH
2200	20 MHz	(2)	8x10CM	5 mV per div	35 MHz	30 MHz
3500	35 MHz	(2)	8x10CM	1 mV per div	50 MHz	60 MHz

All include high quality 1:1, 10:1 hook on probes, instruction/service manual with schematic and component layout. 1 year warranty.

*Add an additional $10.00 for each unit for shipping.

MINI-100 COUNTER

$119.95 CHARGER, NICAD BATTERIES, AC ADAPTER INCLUDED

CT-70 7 DIGIT 525 MHz

$139.95 WIRED, INCLUDES AC ADAPTER

CT-90 9 DIGIT 600 MHz

$169.95 WIRED INCLUDES AC ADAPTER

CT-50 8 DIGIT 600 MHz



$189.95 WIRED INCLUDES AC ADAPTER

CT-125 9 DIGIT 1.2 GHz

$189.95 WIRED INCLUDES AC ADAPTER

MODEL	FREQ RANGE	SENSITIVITY	ACCURACY	DIGITS	RESOLUTION	PRICE
MINI-100	1-500 MHz	Less than 250mv	1 PPM	7	100 Hz, 1 KHz	119.95
CT-70	20 Hz-550 MHz	< 50mv To 150 MHz	1 PPM	7	1Hz, 10Hz, 100Hz	139.95
CT-90	10 Hz-600 MHz	< 10mv To 150 MHz < 150mv To 600 MHz	1 PPM	9	0.1Hz, 1Hz, 10Hz	169.95
CT-50	5 Hz-600 MHz	LESS THAN 25 mv	1 PPM	8	1Hz, 10Hz	189.95
CT-125	10 Hz-1.25 GHz	< 25mv @ 50 MHz < 15mv @ 500 MHz < 100 mv @ 800 MHz	1 PPM	9	0.1Hz, 1Hz, 10Hz	189.95
CT-90 WITH OV-1 OPTION	10 Hz-600 MHz	< 10mv To 150 MHz < 150mv To 600 MHz	0.1 PPM	9	0.1Hz, 1Hz, 10Hz	229.90

RAMSEY FREQUENCY COUNTERS

Ramsey Electronics has been manufacturing electronic test gear for over 10 years and is recognized for lab quality products at breakthrough prices. Our frequency counters have features and capabilities of counters costing twice as much.

RAMSEY D-4100 COMPACT DIGITAL MULTITESTER

$24.95 test leads and battery included

NEW

Compact sized reliability and accuracy. This LCD digital multitester easily fits in your pocket, you can take it anywhere. It features full overload protection • 3½ digit LCD readout • recessed input jacks • safety probes • diode check function • 2000 hours battery life

RAMSEY D-5100 HANDHELD DIGITAL AUTORANGING METER

$49.95 Includes Probes 1 Year Warranty

Provides distinctive audible chirp after contact has been made and meter reading has stabilized. Has TOUCH-HOLD feature to allow readings to be logged or referred to before making the next reading. Up to 10 AMP current capability and a continuity function which beeps on zero Ohms.

$49.95 wired includes AC adapter PR-2 kit $39.95

PR-2 COUNTER PREAMP

The PR-2 is ideal for measuring weak signals from 10 to 1,000 MHz • flat 25 db gain • BNC connectors • great for sniffing RF • ideal receiver/TV preamp

$69.95 wired PS-2 kit $49.95

PS-2 AUDIO MULTIPLIER

The PS-2 is handy for high resolution audio resolution measurements, multiplies Up in frequency • great for PL tone measurements • multiples by 10 or 100 • 0.01 Hz resolution & built-in signal preamp/conditioner

$89.95 wired includes AC adapter

PS-108 1 GHz PRESCALER

Extends the range of your present counter to 1 GHz • 2 stage preamp • divide by 1000 circuitry • super sensitive (50 mV typical) • BNC connectors • 1 GHz in, 1 MHz out • drives any counter

MINI KITS—EASY TO ASSEMBLE—FUN TO USE—FOR BEGINNERS, STUDENTS AND PROS

TONE DECODER
A complete tone decoder on a single PC board. Features: 400-5000 Hz adjustable range via 20 turn pot, voltage regulation, 567 IC. Useful for touch-tone burst detection, FSK, etc. Can also be used as a stable tone encoder. Runs on 5 to 12 volts.
Complete kit, TD-1 **$5.95**

40 WATT 2 mtr PWR AMP
Simple Class C power amp features 8 times power gain 1 W in for 8 out, 2 W in for 15 out, 5 W in for 40 W out. Max output of 50 W, incredible value, complete with all parts, less case and T-R relay.
PA-1, 40 W pwr amp kit **$22.95**
TR-1, RF sensed T-R relay kit **6.95**

COLOR ORGAN
See music come alive! 3 different lights flicker with music. One light each for, high, mid-range and lows. Each individually adjustable and drives up to 300 W. runs on 110VAC.
ML-1 Kit. **$8.95**

VOICE ACTIVATED SWITCH
Voice activated switch kit provides switched output with current capability up to 100 mA. Can drive relays, lights, LED or even a tape recorder motor. Runs on 9 VDC.
VS-1 KIT **$6.95**

VIDEO MODULATOR **$7.95**
Converts any TV to video monitor. Super stable, tunable over ch 4-6. Runs on 5-15V accepts std. video signal. Best unit on the market! Complete kit. VD-1

LED BLINKY KIT
Alternately flashes 2 jumbo LEDs. Use for name badges, buttons, warning panel lights. Runs on 3 to 15 volts.
BL-1 Kit. **$2.95**

UNIVERSAL TIMER
Provides the basic parts and PC board required to provide a source of precision timing and pulse generation. Uses 555 timer IC and includes a range of parts for most timing needs.
UT-5 Kit **$5.95**

MAD BLASTER
Produces LOUD ear shattering and attention getting siren like sound. Can supply up to 15 watts of obnoxious audio. Runs on 6-15 VDC
MB-1 Kit **$4.95**

WHISPER LIGHT
An interesting kit, small mike picks up sounds and converts them to light. The louder the sound, the brighter the light. Includes mike, controls up to 300 W, runs on 110 VAC.
WL-1 Kit **$6.95**

FM WIRELESS MIKE
Transmits up to 300' to any FM broadcast radio, uses any type of mike. Runs on 3 to 9V. Type FM-2 has added sensitive mike preamp stage.
FM-1 Kit **$3.95**
FM-2 Kit **$4.95**

SIREN
Produces upward and downward wail. 5 W peak audio output, runs on 3-15 volts, uses 3-45 ohm speaker.
Complete kit, SM-3 **$2.95**

SUPER SLEUTH
A super sensitive amplifier which will pick up a pin drop at 15 feet! Great for monitoring baby's room or as general purpose amplifier. Full 2W rms output, runs on 6 to 15 volts, uses 8-45 ohm speaker.
BN-9 Kit **$5.95**

60 Hz TIME BASE
Runs on 5-15 VDC. Low current (25ma) 1 min/month accuracy
TB-6 Kit **$5.50**
TB-6 Assy. **$9.95**

TELEPHONE TRANSMITTER
Low cost with professional performance. Features include; self phone line powered, tunable from 76 to 100 MHz, polarity antisensitive, compact size (½" x 1¼"), easily installs anywhere on the phone line or inside the instrument itself.
PB-1 KIT **$14.95**

FM RECEIVER
For built-in applications or hobby experimentation. Full fledged superhetrodyne receiver, microvolt sensitivity, 10.7 MHz IF, Integrated Circuit detector, 50 mw audio amplifier, 9V external power source, operation on standard FM broadcast band as well as large portions on each side, compact (6" square) for bug detection or reception
FR-1 KIT **$14.95**

FM MINI MIKE
A super high performance FM wireless mike kit! Transmits a stable signal up to 300 yards with exceptional audio quality by means of its built in electret mike. Kit includes case, mike, on-off switch, antenna, battery and super instructions. This is the finest unit available.
FM-3 Kit **$14.95**
FM-3 Wired and Tested **19.95**

ACCESSORIES FOR RAMSEY COUNTERS

Telescopic whip antenna—BNC plug	$ 8.95
High impedance probe, light loading	16.95
Low pass probe, audio use	16.95
Direct probe, general purpose use	13.95
Tilt bail, for CT-70, 90, 125	3.95

VISA

PHONE ORDERS CALL
716-586-3950
TELEX 466735 RAMSEY CI
FAX 716-586-4754

MasterCard

TERMS: • satisfaction guaranteed • examine for 10 days, if not pleased, return in original form for refund • add 6% for shipping and insurance to a maximum of $10.00 • foreign add 15% for surface mail • COD add $2.50 (COD in USA only) • orders under $15.00 add $1.50 • NY residents add 7% sales tax. • 90 day parts warranty on all kits • 1 year parts & labor warranty on all wired units.

RAMSEY ELECTRONICS, INC.
2575 Baird Rd.
Penfield, N.Y. 14526

Digital X-Y Oscilloscope Display

A classy, cost-effective tuning indicator.

by Dean R. Becker WA9TYU

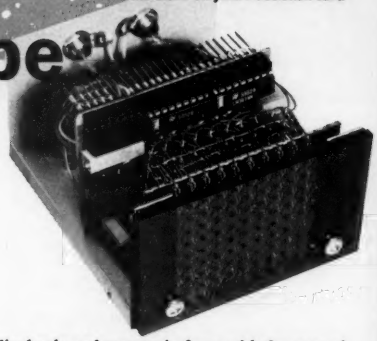

X-Y oscilloscopes are very useful as tuning displays for RTTY demodulators and other applications. There have been numerous articles written describing how to make X-Y displays using conventional cathode ray tubes (CRTs). These make excellent tuning indicators, but the size of a CRT and its support circuitry may be larger than the demodulator it complements! The digital scope described here is small, simple, and works great. Power consumption is very low. This unit is powered by a 9V, 100mA plug-in power supply.

The display is created by 100 LEDs arranged in a 10 × 10 square. The LEDs used here have 0.1 inch lead spacing and are mounted 0.1 inches apart from each other. This works very well with standard 0.1 inch spacing circuit board material, such as the Radio Shack 276-158 with soldering ring holes. Any LED may be used, but small LEDs with 0.1 inch lead spacing will work best. The LEDs are wired together in a matrix. The anodes are tied together in each row, and the cathodes are tied together in each column.

The LED display is driven by two LM3914 dot/bar display drivers (Radio Shack 276-1707). These chips normally drive an LED bar graph display. They have everything needed to take in an audio signal and form a linearly proportional output capable of driving LEDs directly. In the X-Y display, one LM3914 is used to drive the LED columns directly. This provides the current sink for the LEDs. The other LM3914 controls ten PNP transistors that source current to the LEDs via the rows. Most any general purpose PNP transistor will do. By using this arrangement only one LED will be on at a time.

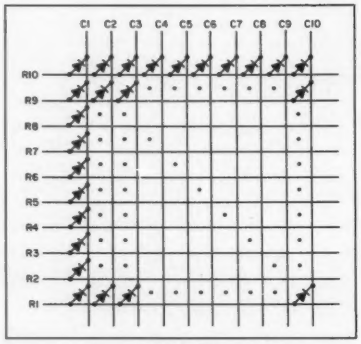

Figure 2. 100 LED Array.

The X and Y inputs are referenced to ground, and each has an amplitude adjustment that scales the input signal to match the display boundaries. An input signal of 1.2 volts can drive the display to full scale. The offset adjustment allows the display to have X,Y = 0,0 in the center, thereby providing a four quadrant display. To use the digital X-Y scope as a RTTY tuning indicator, connect the mark and space filter outputs from the demodulator to the X and Y inputs of the scope.

The display provided by the X-Y digital scope is, of course, not as smooth as that provided by a CRT.

Construction

Two 2.2 × 3-inch circuit boards are used in the construction of the scope. The LED display board mounts in front with the second board mounted about two inches behind. The LEDs should have their leads trimmed so the anodes are ½ inch long and the cathodes are one inch long. Insert and solder the first row of LEDs at the bottom of the board. (Note: the Radio Shack 277-1008 Audio Amp/Speaker has a grid of holes in front that are spaced 0.2 inches apart. This makes a great holder for the LEDs as they are soldered in.)

Now take a length of bare 26 gauge wire and weave it from one LED anode to the next, near the end of the lead. Solder the wire to each anode of the first row. Next insert and solder the next row of LEDs. Using another length of bare 26 gauge wire, solder it to each anode of the second row. Continue this operation for each row until all LEDs are mounted. Next use another length of bare wire to connect the cathodes of the first column near the end of the lead. Do this for each column. When this step is complete connect a short length of wire to each row and each column to be connected to the other circuit board. There should be ten column wires and ten row wires. The column and row bare wires should not contact each other.

Wiring of the second board can be wire wrap or point-to-point soldering. Mount the LM3914s, transistors, resistors, and pots. Connect all intra-board wiring first. Next connect the display wires to the board. Connect the X and Y signal input to phono jacks. And connect the incoming DC power through an on-off toggle switch to the board.

The circuitry can be tested by connecting two oscillators, radio outputs, or RTTY scope outputs as signal sources. Calibrate the offset so that with no signal input, the LEDs in the center of the display light. Provide an input on the X channel only. This should produce a horizontal line in the middle of the display. A similar input to the Y should produce a vertical line in the middle of the display. Connection to the scope outputs of a RTTY demodulator should produce the familiar cross hair pattern in the presence of a RTTY signal.

This design can be modified to include more LM3914s chained to the existing ones. This would allow a larger number of LEDs to in the display if desired. Different color LEDs can also be used to show limits or just to make it more interesting. The LEDs used may be point-source or diffused. This version used point source LEDs, which provide a sharp display.

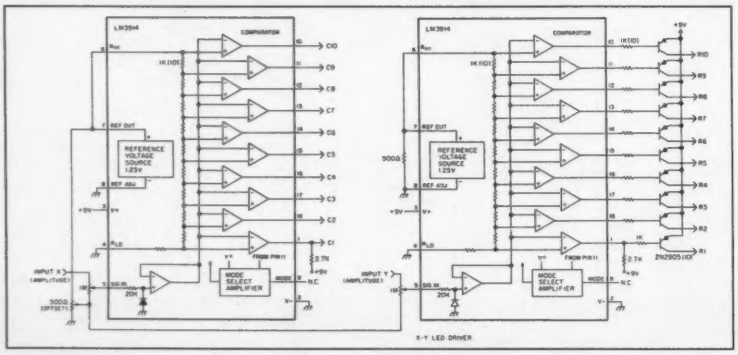

Figure 1. X-Y LED Driver.

ASTRON CORPORATION
9 Autry
Irvine, CA 92718
(714) 458-7277

ASTRON POWER SUPPLIES

• HEAVY DUTY • HIGH QUALITY • RUGGED • RELIABLE •



INSIDE VIEW — RS-12A

SPECIAL FEATURES

- SOLID STATE ELECTRONICALLY REGULATED
- FOLD-BACK CURRENT LIMITING Protects Power Supply from excessive current & continuous shorted output
- CROWBAR OVER VOLTAGE PROTECTION on all Models **except RS-3A, RS-4A, RS-5A.**
- MAINTAIN REGULATION & LOW RIPPLE at low line input Voltage
- HEAVY DUTY HEAT SINK • CHASSIS MOUNT FUSE
- THREE CONDUCTOR POWER CORD
- ONE YEAR WARRANTY • MADE IN U.S.A.

PERFORMANCE SPECIFICATIONS

- INPUT VOLTAGE: 105-125 VAC
- OUTPUT VOLTAGE: 13.8 VDC ± 0.05 volts (Internally Adjustable: 11-15 VDC)
- RIPPLE Less than 5mv peak to peak (full load & low line)
- **Also available with 220 VAC input voltage**

MODEL RS-50A

MODEL RS-50M

MODEL VS-50M

RM SERIES

MODEL RM-35M

19" × 5¼ RACK MOUNT POWER SUPPLIES

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H × W × D	Shipping Wt. (lbs.)
RM-12A	9	12	5¼ × 19 × 8¼	16
RM-35A	25	35	5¼ × 19 × 12½	38
RM-50A	37	50	5¼ × 19 × 12½	50
• Separate Volt and Amp Meters				
RM-12M	9	12	5¼ × 19 × 8¼	16
RM-35M	25	35	5¼ × 19 × 12½	38
RM-50M	37	50	5¼ × 19 × 12½	50

RS-A SERIES

MODEL RS-7A

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H × W × D	Shipping Wt. (lbs.)
RS-3A	2.5	3	3 × 4¾ × 5¾	4
RS-4A	3	4	3¾ × 6½ × 9	5
RS-5A	4	5	3½ × 6⅛ × 7¼	7
RS-7A	5	7	3¾ × 6½ × 9	9
RS-7B	5	7	4 × 7½ × 10¾	10
RS-10A	7.5	10	4 × 7½ × 10¾	11
RS-12A	9	12	4½ × 8 × 9	13
RS-12B	9	12	4 × 7½ × 10¾	13
RS-20A	16	20	5 × 9 × 10½	18
RS-35A	25	35	5 × 11 × 11	27
RS-50A	37	50	6 × 13¾ × 11	46

RS-M SERIES



MODEL RS-35M

MODEL	Continuous Duty (Amps)	ICS* (Amps)	Size (IN) H × W × D	Shipping Wt. (lbs.)
• Switchable volt and Amp meter				
RS-12M	9	12	4½ × 8 × 9	13
• Separate volt and Amp meters				
RS-20M	16	20	5 × 9 × 10½	18
RS-35M	25	35	5 × 11 × 11	27
RS-50M	37	50	6 × 13¾ × 11	46

VS-M AND VRM-M SERIES



MODEL VS-35M

• Separate Volt and Amp Meters • Output Voltage adjustable from 2-15 volts • Current limit adjustable from 1.5 amps to Full Load

MODEL	Continuous Duty (Amps) @13.8VDC	@10VDC	@5VDC	ICS* (Amps) @13.8V	Size (IN) H × W × D	Shipping Wt. (lbs.)
VS-12M	9	5	2	12	4½ × 8 × 9	13
VS-20M	16	9	4	20	5 × 9 × 10½	20
VS-35M	25	15	7	35	5 × 11 × 11	29
VS-50M	37	22	10	50	6 × 13¾ × 11	46
• Variable rack mount power supplies						
VRM-35M	25	15	7	35	5¼ × 19 × 12½	38
VRM-50M	37	22	10	50	5¼ × 19 × 12½	50

RS-S SERIES

MODEL RS-12S

• Built in speaker

MODEL	Continuous Duty (Amps)	ICS* Amps	Size (IN) H × W × D	Shipping Wt. (lbs.)
RS-7S	5	7	4 × 7½ × 10¾	10
RS-10S	7.5	10	4 × 7½ × 10¾	12
RS-12S	9	12	4½ × 8 × 9	13
RS-20S	16	20	5 × 9 × 10½	18

*ICS—Intermittent Communication Service (50% Duty Cycle 5min. on 5 min. off)

CIRCLE 16 ON READER SERVICE CARD

The Care and Feeding of a PBBS

Timely tips for packet bulletin board users (Part I)

by David McLanahan WA1FHB

One of the perks of owning packet is being able to access one or more of the Packet Bulletin Board Systems (PBBSs) springing up all over the country. These PBBSs are one of the greatest leaps in ham radio operation since voice transmission.

Versatility

The PBBSs offer two exciting features never before available to hams. They are an electronic means of disseminating general information—ARRL and AMSAT bulletins, notices of club meetings and events needing amateur communications help—to the ham community without being tied to a net or bulletin schedule. There is also the capability of leaving personal messages for other hams who are not on the air at that particular moment (and receiving similar messages from other hams). These messages can be forwarded automatically from one PBBS to another, even over transcontinental or transoceanic distances.

How does a ham get involved? Bulletin boards can at first daunt a new packeteer. Many hams have little or no experience with computers and their demand of exactitude from the operator.

Logging On

To log onto a board, a packeteer needs only to connect with it. The board does the rest, greeting him in one of several ways and, perhaps, telling him that he has new mail.

The PBBS software provides for two greetings, long and short. (The short one is sometimes called the "expert" greeting.) Both of these can be personalized for the individual PBBS and, if the operator of the board likes, changed periodically to draw attention to some important event or matter. The selection of the long or the short message for a particular user can be changed either by the user (with the "NE" command) or by the PBBS operator.

The long greeting is friendly: "Welcome, Josephine, to the WA1FHB mailbox in Marlow, NH. You were last on at <time> <date> <Last message> number." These messages are followed by the command choices, ending with a right arrow (>). Practices vary, but most PBBSs use 24-hour Universal Coordinated Time (Greenwich Mean Time to the older of us!), identified by a "z."

Long greetings, however, can take forever to get through during periods of heavy QRM and/or heavy activity. Even during good conditions, the long version wastes the operator's (and the channel's) time. A budding packeteer should move on to the short greeting as soon as possible. Here's an example of the terse prompt:

COMMANDS

With either prompt, the PBBS commands are exactly the same. The commands are single letters that may be followed by a modifier or an argument or, often, both. Please memorize: *A command and its modifier are never separated by a space, but a command and an argument are always separated by a space.*

Put together, all this turns into a "command string," which is terminated by pressing the return key, or its equivalent. (The return is generally required by TNCs to send the packet, anyway.) For brevity, I won't mention the return with the explanation of each of the commands, but it's always necessary. Note also that, while I show all commands in capital letters for clarity, the board accepts either upper or lower case.

The command sets the basic operation the operator wants the PBBS to do. The modifier then selects a subcategory of that operation, and the argument designates the subject or victim of the operation.

Instant Help

The three most important commands for the neophyte are the ones for assistance. The first is X, which provides a reference to all the other commands. At the long or the short prompt, X toggles a long command menu:

Note the word "toggle." A toggle key alternates a command between two states (such as "on" and "off"). The X command, for example, gives the long command explanation at each subsequent command prompt, until the user toggles it off by sending another X.

The H command downloads the system's Help file. This file may be customized to some extent for each system, but it generally runs about 36 lines of text. Those with a printer can turn it on before issuing the H command, to get a handy command reference to keep beside the keyboard. The Help file shown in Fig. 4 is an example, but those from other boards may be slightly different.

Finally, there's the I command, which accesses information about that specific PBBS—location, equipment, special interests, etc. Just don't expect the Info file to be up-to-date. It is generally prepared with great glee when the

```
:- Connected to WA1FHB

Hello Peg, Welcome to the wa1fhb Mailbox from David in Marlow, NH
Last on at 2153 on 871210, last message 2383.
X for long menu, NE for short prompt, H for help, L to list new msgs.
You have new mail:
Msg# TR  Size  To     From    @ BBS   Date     Title
2383 PN     1 N1FBC  WB9EUJ          871213 I'll be there Monday!
2381 PN   244 N1FBC  WA1FHB          871213 Thursday?
2378  N   196 N1FBC  KB1ME           871213 Happy Holidays
N1FBC de WA1FHB: at 2053z on 871213 B,D,H,I,J,K,L,N,R,S,T,U,W,X >
```

Figure 1. Long sign-on.

```
N1FBC de WA1FHB: at 2054z on 871213 B,D,H,I,J,K,L,N,R,S,T,U,W,X >
```

Figure 2. Short sign-on.

```
N1FBC de WA1FHB: Date 871213 Time 2053 Last msg # 2382, 109 active msgs
Messages: L - List, R - Read, S - Send, K - Kill
Files:    W - What, D - Download from, U - Upload to
B - Bye, H - Help, N - Enter your name, T - Talk to David
I - Information, J - Calls heard,  X - Short/Long Menu >
```

Figure 3. Long Menu.

board is first put on the air, then totally forgotten as system antennas, towers, rigs and computers come and go.

The Main Commands

These are the commands that actually make the PBBS function. Most of them require an argument.

The first command the user should issue when he accesses a PBBS for the first time is the "name" command. It takes the form "N Ayleen <return>" (using your own name, handle, or alias, of course) and enters your first name into the user file. This has two purposes. In a later connect, it impresses the uninitiated guest to a PBBS demonstration. It also "introduces" the user to the PBBS operator. With a couple of computers in the middle, packet PBBS operation is probably the most impersonal of all the activities in an otherwise friendly and personal hobby—fight the trend!

At the first log-on to a particular PBBS, the board asks the user to specify a home PBBS with the NH command (this concept to be discussed later). If the user isn't sure which board he wants as his home board, he should pick one anyway, since the log-on prompt will keep bugging him for an entry. Simply choose one for the moment, keeping in mind that it's easy to switch. The user should just be sure that if he checks into more than one board, he should specify the same home PBBS on all.

```
This is WORLI 12.0 software. Thanks to Hank for writing it.
Simple commands consist of one or two letters and a RETURN.
The second letter of a command is called a qualifier. Some
commands accept arguments. To add an argument, type a SPACE
after the command or qualifier and then type the argument(s).
UPPER/lower case doesn't matter, but command (string) must end
with ENTER, <cr>, or RETURN.
Do NOT put a space between a command and a qualifier.
For example -- The "L" command lists the messages in the mailbox.
Type just "L" and a RETURN to list all the messages entered since
you last logged in. If there are no NEW messages, you'll get a
"*** None found."
To list just your messages, type "LM" and a RETURN. (The "M"
stands for "Mine".)
To list only messages higher than a particular number, such as
4325, type "L 4325" or "LM 4325". Don't forget the space. This
form is preferred over the plain LM above (faster).
Some other examples:
  SB to send a bulletin message.
  LM 4325 lists only your messages later than 4324.
  LB 4325 lists only bulletins later than 4324..
  LT lists only NTS traffic.
  LL 10 lists the last 10 messages.
  R 3210 to read message 3210.
  K 5432 kills message 5432. (Only works with your messages!)
  KT 5678 kills 5678 (Only works with NTS messages).
  KM kills your messages. *** Please do NOT use! Use K <number>.
  S WORLI to send a message to WORLI.
  SP WORLI to send a "private" message to WORLI.

  N Joe       tells the MailBox that your name is "Joe".
  NH WORLI    tells the MailBox that WORLI is your Home MailBox.
  NE          tells the MailBox to change your Expert status on or off.

A more complete description of how the use the MailBox is in the
file DOC.TNC

Use the D command to download this file:
 D DOC.TNC

Please leave any comments as messages to walfhb.

     Have Fun!  -  David
```

Figure 4. Help file.

```
Msg# TR  Size  To     From    @ BBS   Date     Title
2381 PN   244 N1FBC  WA1FHB          871213 Thursday?
2378  N   196 N1FBC  KB1HE           871213 Happy Holidays
2375 TN   309 NTB037 WA2BPL  WA1FHB 871213 QTC;NEWPORT NH
2374 BN   532 ALL    N1DYF           871213 GBARA Novice course
2373 BN   286 NEPRA  N1DKF  WA1FHB 871213 Al Sears, W1ZHC, BK
2372 TF   232 05445  KA1CRX KD1R    871213 NR707 CHARLOTTE VT
2360 BF   291 NEPRA  N1DKF  KD1R    871213 Al Sears, W1ZHC, BK
2359  F   551 KA2VCS K3PS   KD1R    871213 TNC-1 (@ KD1R-1 IN VT.)
N1CB tried to connect.
2054, fhb,109 msgs>
```

Figure 5. Message listing.

Information, Please

The L command, in various forms, is used to display messages in the PBBS's Mail Box. Surprisingly, the simple, unadorned L command (with no modifier) tends to confuse people. It lists only the messages entered since last log-on. If the packeteer was on the board several hours ago and there hasn't been much activity in the interim, or if she connected over a poor path, then try again using a different digipeater string, an L will come up blank ("None Found," or similar). He needs to use modifiers to dig down into the messages.

LM gives all traffic to or from the logged-on call. LA produces a list of ARRL bulletins, LB lists non-ARRL bulletins, and LT shows NTS traffic on the board. To check on messages to or from another call, use L> W1XXX (messages to W1XXX) or L W1XXX (messages sent by W1XXX). L 789 will show all messages with numbers greater than 789, and LL 10 will list the most recent 10 messages, regardless of message number. None of the List commands will show private messages except those to or from the logged-on call.

An operator can save time (his, the board's and the channel's) when using two-letter L commands (LA, LB, LM, and LT) by limiting the search to the highest message number on the board during his last connect (i.e., LM 5450). This keeps the already-viewed messages from reappearing on the screen. (All of these searches go from most recent back in time, and there's no legitimate way "new" messages could have gotten in to the older part of the listing.)

Here is a display of the result of any of the message listing commands. (The second-to-last line is not part of the message listing.)

The message number comes first. Use that number to read or kill a message. The next column shows the message type and status. The status will be /Y/ for already read (by the addressee), /N/ for not read yet, or /F/ for already autoforwarded to another board. (Boards can be set to kill messages that have been forwarded.)

The column after that displays the message size in bytes, to give an idea of how long it would take to transfer. (A common error is misinterpreting the message size figure as the message number.) Next is the call of the addressee, the call of the sender of the message, and then the optional call of the "home PBBS" of the addressee, followed by the title of the message.

Temporary Data Storage

As the packeteer sits before his monitor perusing the messages, he probably comes across information he wants to write down. There is a quaint, old "low-tech" device I recommend for the purpose: the "Magic Slate." This children's novelty is generally available in five-and-dime stores. It consists of a wax-covered cardboard with a translucent plastic overlay. He can write on the overlay with a stylus or even a fingernail. Lifting the overlay erases it, but, of course, it is non-volatile in the event of power failure.

The Magic Slate is a super place to record the numbers of new messages on a PBBS log-on when reading the first message will probably scroll the other numbers off the screen. Similarly, it's handy for recording interesting file names for sequential down-loading from the PBBS. Put the Magic Slate to good use will prevent load the channel unnecessarily with repeated message listings and directories!

Sending a Message

Most packeteers are anxious to try out this function. Sending isn't difficult, but a little homework with the computer documentation before logging on can go a long way; before logging on, one must determine how to send Control Z.

The common control to end and save a message is "Control Z" (z). For a simple-minded system like an old Teletype™, all one needs to do is find the "Control" key, hold it down while hitting the Z (lower case is fine) then release both. The more sophisticated terminal emulation programs, however, often assume that control characters are commands for them and not to be passed to the TNC. There may be a "lead-in" character to send first. Some boards accept /EX as an alternate message ending.

To send a message, enter S, one space, and the call of the addressee, at the command prompt. The BBS converts lower-case entries into upper case. (The board accepts S <return>, and then prompts for the addressee, but that's doing it the hard way.) Then a prompt for the "title" of the message appears. The program gives up to 80 characters for the title, but one or two short words will usually suffice. If the title is long, it causes line-wrap (use an extra line) every time somebody lists the messages.

When it gets the <return> at the end of the title, the PBBS prompts for the message text and gives the number that it is assigning to that message. Note that number to check the message after entering it.

Be aware of carriage returns when typing the message. Most users have 40-, 64-, or 80-column screens (that's the number of characters displayed in a full line of text or data). If the typed line length exceeds the number of columns on the reader's screen, most computers insert a "default" carriage return/line-feed at the end of the line, probably splitting a word. Some machines substitute the return/line-feed for a character of text. Of course, if this happens, Murphy's Law says that the replaced character will be the third digit of an essential and unlisted phone number.

When done with the message, send the all-important ^Z and a return, and wait. A following prompt indicates that the message has been closed and saved. If the channel isn't busy, check the message by sending an R, space, and the message number to read it.

If the prompt didn't show, assume that the CONTROL-Z didn't make it and the message hasn't been saved. There are several things that may have happened. It's possible that the terminal program went off into the weeds. Recovering it depends on the user's particular set-up. If only the computer is confused, unplug the cable between computer and TNC (so as not to inadvertently disconnect from the PBBS), then reset the computer and reinitialize the terminal program (and, of course, replace the TNC cable) within the three or four minutes the PBBS gives you before it times out and disconnects. If the CONTROL-Z is successfully sent the second time around, the message is saved.

This isn't good packet form and should be used only as a last resort, but if all else fails, turn off the set-up: radio, TNC, and computer. Reinitialize everything and let the bulletin board "time out" in three or four minutes and reset itself. Any message left on the bulletin board, however, will be discarded and gone.

There's one wrinkle to sending personal messages to a recipient on another PBBS. (Message forwarding is discussed in more detail next month). If possible, provide the call of the recipient's home PBBS. To do this, after entering the addressee's call, add a space, then an "at" sign @, another space, and the PBBS call: S WA1VMZ @ WA1FHB or SB ALL @ W0RLI.

Message Categories

There are several modifiers for the S command. (They show up in the "type" column mentioned earlier.)

SP sends a private message. This is not, of course, truly private since the message is sent over a public channel, and the PBBS operator can (and may well) read it. The L command, however, won't list it, except when the addressee is logged on. This makes the L listing for others shorter and more useful, and no one else can read the message over the air. If a friend's call appears in the "Mail for" beacon, but not in the message list, then the message was marked private.

ST is used for formal NTS traffic. The actual contents of the address and "at" fields for NTS messages is presently in a state of flux, with "NTS" plus the ARRL Section abbreviation (e.g., NTSWMA), five-digit zip code, telephone area code, and "NTS" plus the three-digit postal SCF (the first three digits of the zip) all being used in various area. Until this situation settles, determine and follow local practice.

The title of the message should contain the call and message number of the station putting the message into the packet system as well as the *destination* town and two-letter state abbreviation. The normal NTS message preamble should form the first line in the message body.

SA is reserved for official ARRL Bulletins. SB is for general (non-ARRL) bulletins—AMSAT, local club and so forth.

Bulletins

Bulletins are often addressed to ALL. Take care to not use ALL too readily. The title can often target a specific group: AMSAT, ARES, etc.

If a bulletin announces an event (meeting, hamfest, exam session, or the like) put both the location and the date in the title. This

```
Msg# TR  Size  To    From   @ BBS  Date    Title
1668 TN   222 NTSIA  KA1IFC        871119 NR 228 KA1IFC QTC Des Moines, Ia
NR 228 R KA1IFC 18 Baldwinville Ma Nov 18

Bob Kurtz
922 Boulder Ave
Des Moines Ia 50315

515 243 5493

Turkey day fast approaching x
Looking for a bird to
pluck and stuff x You
available query 88

Jean
```

Figure 6. NTS text message.

```
Msg# TR  Size  To    From   @ BBS  Date    Title
2335 SN   548 WB1GXM W1FJI          871212 308 wb1gxm qtc reno nevada
R:871211/2237z @:WB1DSW East Kingston, NH #:1191 O:W1FJI
R:871211/2054z @:K1UGM Wakefield, Ma #:2374 O:W1FJI
R:871211/2030z @:W1AW Newington, CT #:2021 O:W1FJI
R:871211/1930Z @:WA2RKN #210C [Hyde Park, NY]
R:871211/1927z @:AG3F Towanda, Pa #:5270 O:W1FJI Z:18848
R:871211/1916z @:AG3F Towanda, Pa #:381 O:W1FJI Z:18848 [HF]
R:871211/1616z @:WA5QZI @@000 : Alamo Gateway [San Antonio, TX]
R:871209/2032m @:KE7CZ Dewey, Az #:1715 O:W1FJI
R:871209/1854m @:W1FJI #2381 [Scottsdale, Az.] O:W1FJI
Msg  2371 taken from W1FJI  by W1IBP  at 1854 on 871209
```

Figure 7. NTS service message.

saves "over the air" reading time, and helps the PBBS operator purge stale material. There's little as frustrating as reading an invitation to a great hamfest that took place last weekend!

Don't type in long bulletins to ALL on the local PBBS on-line, since it's impossible to edit. Prepare and format the message with a word processor (watching for carriage returns and other details), then log onto the PBBS and send the message as an ASCII file transfer.

Disable any error-checking, such as XModem protocol, that the modem program might like to use. First, the PBBS will not handshake with a telephone protocol. Second, it isn't necessary because packet provides its own error checking. Third, even if it worked, it would nearly double the channel load with XModem's single-character ACKs and NAKs that would have to be made into a packet.

Opinions and Diatribes

Bulletins needn't be limited to announcements of new facilities and club meetings. The first amendment to the US Constitution does not give anyone the inalienable right to publish their views on someone else's PBBS—the board is private property and under the control of its owner. Most PBBS operators, however, feel an obligation to allow and encourage discussions or debate on a wide range of subjects of interest to their readers, whether they, personally, agree or not.

Unless the operator of a particular board has said otherwise, feel free to enter bulletins or messages to ALL on any subject as long as they avoid the business and obscenity prohibitions of the FCC and are not direct, personal attacks.

Follow these guidelines when entering opinions on the local PBBS: Keep them tight and to the point—less than, say, 2000 characters. Messages longer than that are time-consuming to read, even through just one digipeater, and are difficult to forward. Try also to use an honestly descriptive title. Misleading titles often anger and alienate people!

Lastly, pay attention to the presentation. If it's messy, with scattered thoughts, misspellings and poor formatting, its brilliant logic may not shine through and you will do your cause a disservice.

One-liners

Sometimes if a bulletin to ALL or a message is very short, the entire text can be squeezed into the 40 or so characters for the title. You wind up with a message of length 1 (that one is the ^Z that ends the message). "MAPRA Meeting Sunday!" or the like. If you see one of these, don't bother "reading" it with the R command. It's all in the title in the message list. The one-liner is also a way of leaving a short message for someone who may be connecting to the PBBS over a difficult path, because the title is sent prior to the first prompt.

The "message" will show up in every message listing and the addressee call will remain in the mail beacon until it's either read by the addressee (with the R command) or killed. A one-liner is sent the same as any other message. Send the ^Z and <return> when the board prompts you for the text.

Kill!

K <NUMBER> will kill message <number>. Before executing a K instruction, the board will check that the operator is either the sender or the addressee of that message. If not, the command won't work. Of course K won't work if the message is misaddressed–KI("eye")ZJH in place of K1("one")ZJH, for example.

There are several modifiers for the K command. KM will kill messages, KT <number> will kill NTS traffic and, on some boards, generate a service message back to the sender, giving the "killer's" call and the date/time the message was taken.

Next month: Disk files and mail forwarding.

uniden®

$12,000,000 Scanner Sale

Uniden Corporation of America has purchased the consumer products line of Regency Electronics Inc. for about $12,000,000. To celebrate this purchase, we're having our largest scanner sale in history! Use the coupon in this ad for big savings. Hurry...offer ends July 31, 1988.

★★★ MONEY SAVING COUPON ★★★

COUPON COUPON

Get special savings on the scanners listed in this coupon. This coupon must be included with your prepaid order. Credit cards, personal checks and quantity discounts are excluded from this offer. Offer valid only on prepaid orders mailed directly to Communications Electronics Inc., P.O. Box 1045 – Dept. UNI2, Ann Arbor, Michigan 48106-1045 U.S.A. Hurry...coupon expires July 31, 1988. Coupon may not be used in conjunction with any other offer from CEI. Limit one coupon per scanner. Add $7.00 for shipping in the continental U.S.A.

Regency TS2-SA $269.95
Regency TS1-SA $199.95
Regency INF1-SA2 .....$139.95
Regency INF2-SA2 .....$159.95
Regency INF3-SA2 .....$119.95
Regency INF5-SA2 .....$109.95
Bearcat 200XLT-SA2 ...$262.95
Bearcat 100XLT-SA2 ...$189.95
Bearcat 800XLT-SA2 ...$249.95
Bearcat 210XLT-SA2 ...$177.95
Bearcat 70XLT-SA2.....$154.95

★★★★ VALUABLE COUPON ★★★★

NEW! Bearcat® 760XLT-SA3

List price $499.95/CE price $279.95/SPECIAL
12-Band, 100 Channel • Crystalless • AC/DC
Frequency range: 29-54, 118-174, 406-512, 806-956 MHz. Excludes 823.9875-849.0125 and 868.9875-894.0125 MHz.
The *Bearcat* 760XLT has 100 programmable channels organized as five channel banks for easy use, and 12 bands of coverage including the 800 MHz. band. The *Bearcat* 760XLT mounts neatly under the dash and connects directly to fuse block or battery. The unit also has an AC adaptor, flip down stand and telescopic antenna for desk top use. 6-5/16" W x 1⅝" H x 7⅜" D. Model **BC 580XLT-SA** is a similar version without the 800 MHz. band for only $219.95.

SALE! Regency® TS2-SA

List price $499.95/CE price $309.95/SPECIAL
12-Band, 75 Channel • Crystalless • AC/DC
Frequency range: 29-54, 118-175, 406-512, 806-950 MHz.
The *Regency* TS2 scanner lets you monitor Military, Space Satellites, Government, Railroad, Justice Department, State Department, Fish & Game, Immigration, Marine, Police and Fire Departments, Aeronautical AM band, Paramedics, Amateur Radio, plus thousands of other radio frequencies most scanners can't pick up. The *Regency* TS2 features new 40 channel per second *Turbo Scan*™ so you wont miss any of the action. Model **TS1-SA** is a 35 channel version of this radio without the 800 MHz. band and costs only $239.95.

Regency® RH256B-SA

List price $799.95/CE price $329.95/SPECIAL
16 Channel • 25 Watt Transceiver • Priority
The *Regency* RH256B is a sixteen-channel VHF land mobile transceiver designed to cover any frequency between 150 to 162 MHz. Since this radio is synthesized, no expensive crystals are needed to store up to 16 frequencies without battery backup. All radios come with CTCSS tone and scanning capabilities. A monitor and night/day switch is also standard. This transceiver even has a priority function. The RH256 makes an ideal radio for any police or fire department volunteer because of its low cost and high performance. A *60 Watt* VHF 150-162 MHz. version called the **RH606B-SA** is available for $429.95. A UHF 15 watt, 10 channel version of this radio called the **RU150B-SA** is also available and covers 450-482 MHz. but the cost is $419.95.

★★★ Uniden CB Radios ★★★

The *Uniden* line of Citizens Band Radio transceivers is styled to compliment other mobile audio equipment. Uniden CB radios are so reliable that they have a two year limited warranty. From the feature packed PRO 810E to the 310E handheld, there is no better Citizens Band radio on the market today.

PRO310E-SA *Uniden* 40 Ch. Portable/Mobile CB ... $85.95
PRO330E-SA *Uniden* 40 Ch. Remote mount CB ... $109.95
NINJA-SA PRO310E with rechargeable battery pack.$99.95
B-10-SA 1.2V AA Ni-cad battery for Ninja (set of 10) ... $20.95
KARATE-SA *Uniden* 40 channel rescue radio $69.95
PRO510XL-SA *Uniden* 40 channel CB Mobile $49.95
PRO520XL-SA *Uniden* 40 channel CB Mobile $59.95
PRO540E-SA *Uniden* 40 channel CB Mobile..... $119.95
PRO640E-SA *Uniden* 40 channel SSB CB Mobile... $159.95
PRO710E-SA *Uniden* 40 channel CB Base..... $119.95
PRO810E-SA *Uniden* 40 channel SSB CB Base ... $179.95

★★★ Uniden Radar Detectors ★★★

Buy the finest *Uniden* radar detectors from CEI today.
RD7-SA *Uniden* visor mount radar detector $109.95
RD9-SA *Uniden* "Passport" size radar detector... $129.95
RD9XL-SA *Uniden* "micro" size radar detector ... $159.95
RD25-SA *Uniden* visor mount radar detector $59.95
RD500-SA Uniden visor mount radar detector $79.95

NEW! Bearcat® 200XLT-SA

List price $509.95/CE price $299.95
12-Band, 200 Channel • 800 MHz. Handheld Search • Limit • Hold • Priority • Lockout
Frequency range: 29-54, 118-174, 406-512, 806-956 MHz. Excludes 823.9875-849.0125 and 868.9875-894.0125 MHz.
The *Bearcat* 200XLT sets a new standard for handheld scanners in performance and dependability. This full featured unit has 200 programmable channels with 20 scanning banks and 12 band coverage. If you want a very similar model without the 800 MHz. band and 100 channels, order the **BC 100XLT-SA3** for only $199.95. Includes antenna, carrying case with belt loop, ni-cad battery pack, AC adapter and earphone. Order your scanner now.

Bearcat® 800XLT-SA

List price $549.95/CE price $259.95/SPECIAL
12-Band, 40 Channel • No-crystal scanner Priority control • Search/Scan • AC/DC
Bands: 29-54, 118-174, 406-512, 806-912 MHz.
The Uniden 800XLT receives 40 channels in two banks. Scans 15 channels per second. Size 9¼" x 4½" x 12½." If you do not need the 800 MHz. band, a similar model called the **BC 210XLT-SA** is available for $196.95.

Bearcat® 145XL-SA

List price $189.95/CE price $98.95/SPECIAL
10-Band, 16 Channel • No-crystal scanner Priority control • Weather search • AC/DC
Bands: 29-54, 136-174, 406-512 MHz.
The *Bearcat* 145XL is a 16 channel, programmable scanner covering ten frequency banda. The unit features a built-in delay function that adds a three second delay on all channels to prevent missed transmissions.

Bearcat® 175XL-SA

List price $279.95/CE price $156.95/SPECIAL
11-Band, 16 Channel • Weather Search Priority control • Search/Scan • AC/DC
Bands: 29-54, 118-174, 406-512 MHz.
The *Bearcat* 175XL has an automatic search feature to locate new frequencies. Priority, lock out, delay and scan speed are all included.

Regency® Informant™ Scanners

Frequency coverage: 35-54, 136-174 406-512 MHz.
The new *Regency* Informant scanners cover virtually all the standard police, fire, emergency and weather frequencies. These special scanners are preprogrammed by state in the units memory. Just pick a state and a category. The Informant does the rest. All Informant radios have a feature called *Turbo Scan*™ to scan up to 40 channels per second. The **INF1-SA3** is ideal for truckers and is only $179.95. The new **INF2-SA3** is a deluxe model and has ham radio, a weather alert and other exciting features built in for only $219.95. For base station use, the **INF5-SA3** is only $129.95 and for those who can afford the best, the **INF3-SA3** at $149.95, is a state-of-the-art, receiver that spells out what service you're listining to such as Military, Airphone, Paging, State Police, Coast Guard or Press.

Regency® HX1500-SA

List price $369.95/CE price $179.95/SPECIAL
11-Band, 55 Channel • Handheld/Portable Search • Lockout • Priority • Bank Select Sidelit liquid crystal display • EAROM Memory Direct Channel Access Feature • Scan delay
Bands: 29-54, 118-136, 144-174, 406-420, 440-512 MHz.
Scan up to 55 channels at the same time. Includes belt clip, flexible antenna and earphone.

BC760XLT
800 MHz. mobile scanner
Only $279.95

★★★ Uniden Cordless Phones ★★★

A major consumer magazine did a comparison study on cordless phones. The check points included clarity, efficiency and price. *Uniden* was rated best buy.

XE700-SA *Uniden* Cordless Phone with speaker ... $114.95

★★★ Extended Warranty Program ★★★

If you purchase a scanner, CB, radar detector or cordless phone from any store in the U.S. or Canada within the last 30 days, you can get up to three years of extended warranty service from Warrantech. This service extension plan begins *after* the manufacturer's warranty expires. Warrantech will perform all necessary labor and will not charge for return shipping. Extended warranties are non-refundable and apply only to the original purchaser. A two year extended warranty on a mobile or base scanner is $29.99 and three years is $39.99. For handheld scanners, 2 years is $59.99 and 3 years is $79.99. For radar detectors, two years is $29.99. For CB radios, 2 years is $39.99. For cordless phones, 3 years is $34.99. Order your warranty for your merchandise today.

OTHER RADIOS AND ACCESSORIES

HR-2510-SA *Uniden* 25 Watt 10 meter Ham radio... $239.95
BC 55XL-SA *Bearcat* 10 channel scanner..... $114.95
BC 70XLT-SA *Bearcat* 20 channel scanner $169.95
NEW! **BC 560XLT-SA** *Bearcat* 16 channel scanner... $98.95
MT5100 PLUS-SA *Regency* marine transceiver ... $134.95
MT5500 PLUS-SA *Regency* marine transceiver ... $159.95
R1090-SA *Regency* 45 ch. scanner $119.95
Z60-SA *Regency* 60 ch. scanner ... **CLOSEOUT** $129.95
UC102-SA *Regency* VHF 2 ch. 1 Watt transceiver ... $117.95
BP55-SA *Regency* 16 amp reg. power supply $169.95
MA549-SA Drop-in charger for HX1200 & HX1500... $84.95
MA518-SA Wall charger for HX1500 scanner $14.95
MA553-SA Carrying case for HX1500 scanner $19.95
MA257-SA Cigarette lighter cord for HX12/1500 ... $19.95
MA917-SA Ni-Cad battery pack for HX1000/1200 ... $34.95
BP205 Ni-Cad battery pack for BC200/BC100XLT... $49.95
B-8-SA 1.2 V AA Ni-Cad batteries (set of eight) $17.95
FB-E-SA Frequency Directory for Eastern U.S.A. $14.95
FB-W-SA Frequency Directory for Western U.S.A. ... $14.95
ASD-SA Air Scan Directory $14.95
SRF-SA Survival Radio Frequency Directory..... $14.95
TSG-SA "Top Secret" Registry of U.S. Govt. Freq.... $14.95
TIC-SA Techniques for Intercepting Comm..... $14.95
RRF-SA Railroad frequency directory..... $14.95
EEC-SA Embassy & Espionage Communications ... $14.95
CIE-SA Covert Intelligenct, Elect. Eavesdropping ... $14.95
MFF-SA Midwest Federal Frequency directory $14.95
A60-SA Magnet mount mobile scanner antenna... $35.95
A70-SA Base station scanner antenna..... $35.95
USAMM-SA Mag mount VHF ant. w/ 12' cable..... $39.95
USAK-SA ¾" hole mount VHF ant. w/ 17' cable.... $35.95
USAK450-SA ¾" hole mount UHF ant. w/ 17' cable... $35.95
Add $3.00 shipping for all accessories ordered at the same time. Add $7.00 shipping per radio and $3.00 per antenna.

BUY WITH CONFIDENCE

To ***get the fastest delivery from CEI*** of any scanner, send or phone your order directly to our Scanner Distribution Center.™ Michigan residents please add 4% sales tax or supply your tax I.D. number. Written purchase orders are accepted from approved government agencies and most well rated firms at a 10% surcharge for net 10 billing. All sales are subject to availability, acceptance and verification. All sales on accessories are final. Prices, terms and specifications are subject to change without notice. All prices are in U.S. dollars. Out of stock items will be placed on backorder automatically unless CEI is instructed differently. A $5.00 additional handling fee will be charged for all orders with a merchandise total under $50.00. Shipments are F.O.B. CEI warehouse in Ann Arbor, Michigan. No COD's. Most items listed have a manufacturer's warranty. Free copies of warranties on these products are available by writing to CEI. Non-certified checks require bank clearance. Not responsible for typographical errors.

Mail orders to: Communications Electronics,™ Box 1045, Ann Arbor, Michigan 48106 U.S.A. Add $7.00 per scanner for R.P.S./U.P.S. *ground* shipping and handling in the continental U.S.A. For Canada, Puerto Rico, Hawaii, Alaska, or APO/FPO delivery, shipping charges are three times continental U.S. rates. If you have a Discover, Visa or MasterCard, you may call and place a credit card order. Order toll-free in the U.S. Dial 800-USA-SCAN. In Canada, order toll-free by calling 800-221-3475. FAX anytime, dial 313-971-6000. If you are outside the U.S. or in Michigan dial 313-973-8888. Order today.

Scanner Distribution Center™ and CEI logos are trademarks of Communications Electronics Inc.

AD #050388-SA2

Copyright © 1988 Communications Electronics Inc.

For credit card orders call 1-800-USA-SCAN

COMMUNICATIONS ELECTRONICS INC.™

Consumer Products Division

P.O. Box 1045 □ Ann Arbor, Michigan 48106-1045 U.S.A.
For orders call 313-973-8888 or FAX 313-971-6000

CIRCLE 121 ON READER SERVICE CARD

Number 9 on your Feedback card

ICOM America, Inc.
2380 116th Ave. NE
Bellevue WA 98004
Price Class: $1400

73 Review *by Pete Putman KT2B*

ICOM IC-375A 220-MHz Multimode Transceiver

It's finally happened. All diehard 220 enthusiasts can now rejoice and revel in ICOM's latest entry into the VHF/UHF multimode market: The IC-375A transceiver. It's made exclusively for the North American amateur market.

Similar in design and operation to the IC-275 and IC-475, this radio offers a wealth of features for everyone, from the casual FM operator to hard-core packeteers. Considering this is the first time any company has manufactured such a transceiver, one has to be impressed with the sophistication of the design.

The ICOM IC-375 220-MHz multimode transceiver.

Overview

Figure 1 shows the front panel. Note the virtually identical copy of its sister transceivers for 2m and 70cm. The bright, backlit amber LCD display jumps out, showing frequency, VFO, memory channel, RIT, tone squelch, duplex offset, and mode. The frequency selection dial sits beneath the display, and has silky-smooth operation over a variety of tuning increments.

Modes

The 375 has four modes: FM, LSB, USB and CW. Pushing the CW mode switch again enables the optional CW filter (500 Hz), which the operator can use in conjunction with the Passband Tuning (PBT) and Notch controls for enhanced selectivity. Provision is made to switch a tower-mounted preamplifier from the front panel (maximum power: 100 watts) as well as to enable a built-in speech compressor. There are also two speeds of AGC selection.

The user can select sub-tone frequencies on both receive and transmit, and store any combination of offsets, sub-tones, modes and frequencies in 99 seperate memory channels—more than adequate for everyday use. Two priority channels are also available which store similar data.

RIT (Receiver Incremental Tuning) is standard and permits a shift of up to 9.9 kHz either side of the displayed frequency. The RIT can be cleared to zero offset at the touch of a button. This feature works in all modes, including FM.

> *". . . the user can adjust the tone of his transmitted audio and set the degree of compression in the speech processor."*

Additional controls set up the microphone gain (not deviation), RF output power, RF gain, CW keying delay, meter display, and AF tone quality from the built-in speaker. The AF gain and squelch controls are located to the right of the display meter, directly below the main power switch, in order not to confuse them with any other controls.

Several scan rates are available. The standard band scan is incorporated, along with programmable range scanning, selectable mode scanning through memories, and general purpose memory scanning. A skip button allows the operator to lock out undesired channels when in scan mode. When using the programmable scan function, transmitting or touching the main tuning dial erases the preprogrammed band limits.

As on all new ICOM multimodes, the 375 has full break-in keying (QSK). Current activity levels are presently too low for QSK to be really useful now. In many cases also, full break-in keying isn't usable due to sequenced switching of amplifiers and external preamplifiers. The optional AG-30 mast-mounted preamplifier won't function when full QSK is selected either. Semi break-in is also available with the drop-out delay set from the front panel. Note that no VOX operation is available—none of the new '75 series transceivers offer it.

The DATA switch on the 275 and 475 is also available here. ICOM claims a switching time of less than 5 milliseconds, which should be ideal for packet operation. Packeteers will not be able to use an external amplifier or preamplifier, however, due to this rapid switch time. The IC-375 also runs AMTOR, conventional AFSK RTTY, and SSTV.

A small insert with the IC-375A tells of the availability of the ICOM CIS (Communication Interface System), permitting control of these radios through a personal computer and RS-232 port. Such control permits displaying and operating the frequency, mode, memory selection and scanning functions, among others. ICOM doesn't say, however, what

software is available to do the job, so look for it in the next few months.

The rear panel also has many controls. In addition to the CW keying speed, the user can adjust the tone of his transmitted audio (brilliant!) and set the degree of compression in the speech processor. The remote connection for the RS-232 interface is here, as well as two accessory jacks for the ICOM AQS automatic squelch system and ALC control/external keying/receiver output.

The operator can also monitor his SWR via a three-way switch on the rear panel as well as power output. Connections for a CW key and external speaker are found here using 2.5mm miniplugs, and the CW sidetone level is accessible here. The antenna connector of choice is the SO-239 "UHF" socket, which is pretty much standard on 220 equipment. Although the IC-375A comes with a built-in AC supply, the user can also access the 13.8 volt input directly for portable use with the supplied DC power cable.

Observations

I've had the IC-375 in my station for quite a few months now, and gave it a fairly hard run during the September VHF QSO Party. Over 50 stations were worked from this location using the IC-375A, a Mirage C1012 amplifier, and a single Cushcraft 220 Boomer at 60 feet. Most of my operation was on SSB and CW (I use primarily an IC-37 for FM work), and the transceiver performed flawlessly the entire weekend. I had to stop operating and switch feedlines on 220 halfway through the contest due to an extremely high SWR condition that apparently made no difference to the 375A.

CW was the main mode that weekend due to the generally terrible conditions and weak signals. I preferred the semi break-in mode and use a special eight-pin DIN to RCA plug cable to switch the C1012. The 375A, by the way, keys an external amplifier by pulling it to ground, which is fairly standard practice. The eight-pin plug is similar to the one used by Kenwood. Since there was no available AG-30 preamplifier, I used the preamplifier in the Mirage with minimal results. The front-end sensitivity of the 375A is such that a preamp isn't needed most of the time. However, the S-meter is just as "dead" as on the 275 and 475, as the reader will soon see in the test data.

"The front-end performance of this particular unit . . . is not on a par with the IC-275A and IC-475A."

In practice, I set the AF Tone control at about 10 o'clock to eliminate a high-frequency hiss present with no signals and the squelch open. The speech compressor didn't seem to make much difference on distant contacts. It took as many tries to work weak stations with compression on as it did with compression off.

Specification			Claimed	Measured
Frequency Coverage:	Transmit:		216–236 MHz	216.00–236.00 MHz
	Receive:		same	same
Output Power:	220.100	High	25 watts	28 watts
		Low	2.5 watts	2.5 watts
	223.50	High	25 watts	25 watts
		Low	2.5 watts	2.5 watts
Receiver Sensitivity:				
USB/LSB/CW	10 dB S/N @ 220.100		<.28 uV	.2 uV
	10 dB S/N @ 223.50		<.28 uV	.2 uV
FM	10 dB S/N		<.18 µV for 12 dB SINAD	.2 µV for 12 dB SINAD
Signal for "S9" reading			n/a	3.5 µV
1-dB compression/output			n/a	−9 dB
Conversion Gain, First RF Amp/Mixer			n/a	18 dB
Selectivity, SSB/CW			2.3 kHz/6 dB	n/a
			4.0 kHz/60 dB	n/a
Selectivity, FM			15 kHz/6 dB	as claimed
			30 kHz/60 dB	as claimed

The RIT control is a real help on 220, especially with all the older stations that drift out of the passband.

I used the Programmable Scan to set up limits of 220.080–220.150 MHz so that the radio was always seeking out new stations while I was on other bands. Most of the activity on 220 SSB or CW occurs during the activity hours at 0800Z and 2000Z with the band fairly quiet otherwise. Using this scan feature allows the contester to keep an extra "ear" on the band in case of an opening or a new grid square.

Received signal reports were favorable regarding the crispness of the audio as well as clarity. Based on these reports, I set the MIC GAIN control at 12 o'clock and left it there permanently. The supplied microphone is the ICOM HM-12 scanning type, allowing remote up/down selection of frequency. Serious contesters may wish to go with the optional SM-8 base station microphone and a footswitch, leaving the hands free for logging and tuning. (ICOM also makes the SM-10 microphone with a graphic equalizer and speech compressor.)

Performance

The following measurements were taken with an HP608F generator, Boonton 92 millivoltmeter and Bird 43 wattmeter. Power source was the internal AC supply. Take note, however, of two points.

- The IC-375A transmits across the entire specified range, but power output falls off significantly outside 220–225 MHz.
- Receiver compression point was significantly lower than on similar IC-275A and IC-475A models. See the sidebar.

Conclusions

The IC-375A represents a significant step forward in 220 MHz technology. There is no other comparable product that exists today. ICOM has built every possible feature into this transceiver to cover the wide range of operations and modes on 220 MHz. Its output power is sufficient to drive both solid-state and ground-grid tube amplifiers, such as the 8877 and 3CX800, to near the legal limit.

The front-end performance of this particular unit, however, is not on a par with the IC-275A and IC-475A. It took considerably less signal to drive the front end into compression, and this might mean some noticeable intermod products during contest operation, or when strong adjacent channel signals are present such as television channels 12 or 13.

I noticed a slight amount of AGC "pumping" during contest operation when other strong signals were present, but it didn't degrade front-end sensitivity that much. The external preamp might make this situation worse depending on its particular compression characteristics. Indeed, switching my external JFET preamp inline during crowded band conditions did just that.

Still, for the serious UHF operator, the IC-375A is a great way to go for multimode operations. The overall design and performance combined with ease of operation makes this an excellent choice of transceiver. 73

HF Equipment	Regular	SALE
IC-761 HF xcvr/SW rcvr/ps/AT	2699.00	2369
HM-36 Scanning hand microphone	47.00	
SP-20 Ext. speaker w/audio filter	149.00	139.95
FL-101 250 Hz 1st IF CW filter	73.50	
FL-53A 250 Hz 2nd IF CW filter	115.00	109.95
FL-102 6 kHz AM filter	59.00	
EX-310 Voice synthesizer	59.00	

IC-751A 9-band xcvr/.1-30 MHz rcvr	1699.00	1449
PS-35 Internal power supply	219.00	199.95
FL-32A 500 Hz CW filter (1st IF)	69.00	
FL-63A 250 Hz CW filter (1st IF)	59.00	
FL-52A 500 Hz CW filter (2nd IF)	115.00	109.95
FL-53A 250 Hz CW filter (2nd IF)	115.00	109.95
FL-33 AM filter	49.00	
FL-70 2.8 kHz wide SSB filter	59.00	
RC-10 External frequency controller	49.00	



IC-735 HF transceiver/SW rcvr/mic	1099.00	959.95
PS-55 External power supply	219.00	199.95
AT-150 Automatic antenna tuner	445.00	389.95
FL-32A 500 Hz CW filter	69.00	
EX-243 Electronic keyer unit	64.50	
UT-30 Tone encoder	18.50	

Other Accessories	Regular	SALE
IC-2KL 160-15m solid state amp w/ps	1999.00	1699
PS-15 20A external power supply	175.00	159.95
PS-30 Systems p/s w/cord, 6-pin plug	349.00	319.95
MB Mobile mount, 735/751A/761A	25.99	
SP-3 External speaker	65.00	
SP-7 Small external speaker	51.99	
CR-64 High stab. ref. xtal for 751A	79.00	
PP-1 Speaker/patch	179.00	164.95
SM-6 Desk microphone	47.95	
SM-8 Desk mic - two cables, Scan	89.00	
SM-10 Compressor/graph EQ, 8 pin mic	149.00	139.95
AT-100 100W 8-band auto. antenna tuner	445.00	389.95
AT-500 500W 9-band auto. antenna tuner	589.00	519.95
AH-2 8-band tuner w/mount & whip	659.00	589.95
AH-2A Antenna tuner system, only	519.00	449.95
GC-5 World clock	91.95	89.95

VHF/UHF base multi-modes	Regular	SALE
IC-275A 25W 2m FM/SSB/CW w/ps	1299.00	1149
IC-275H 100W 2m FM/SSB/CW	1399.00	1229
IC-375A 25W 220 FM/SSB/CW	1399.00	1229
IC-475A 25W 440 FM/SSB/CW w/ps	1399.00	1249

ICOM

IC-475H 75W 440 FM/SSB/CW	1599.00	1429
IC-575A 25W 6 + 10m xcvr w/ps	1399.00	1249

IC-471H* 75W 430-450 ... **CLOSEOUT**	1399.00	989.95
PS-35 Internal power supply	219.00	199.95
AG-35* Mast mounted preamplifier	99.75	

***AG-35 $9.95 with IC-471H Purchase**

Other accessories for IC-471H	
SM-6 Desk microphone	47.95
EX-310 Voice synthesizer	59.00
TS-32 CommSpec encode/decoder	59.95
UT-15 Encoder/decoder interface	34.00
UT-15S UT-15S w/TS-32 installed	96.00

VHF mobile multi-mode		Regular	SALE
IC-290H 25W 2m SSB/FM	**Closeout**	639.00	549.95

VHF/UHF/1.2 GHz FM		Regular	SALE
IC-27A 25w 2m FM/TTP mic	**Closeout**	429.00	349.95
IC-27H 45w 2m FM/TTP mic	**Closeout**	459.00	399.95
IC-37A 25w 220 FM/TTP mic	**Closeout**	499.00	399.95
IC-47A 25w 440 FM/TTP mic	**Closeout**	549.00	469.95
PS-45 Compact 8A power supply		145.00	134.95
UT-16/EX-388 Voice synthesizer		34.99	
SP-10 Slim-line external speaker		35.99	
IC-28A 25W 2m FM, regular mic		429.00	349.95
IC-28A 25W 2m FM, **TTP** mic		469.00	409.95
IC-28H 45W 2m FM, **TTP** mic		499.00	439.95
IC-38A 25W 220 FM, regular mic		459.00	369.95
IC-38A 25W 220 FM, **TTP** mic		489.00	429.95
IC-48A 25W 440-450 FM, regular mic		459.00	369.95
IC-48A 25W 440-450 FM, **TTP** mic		509.00	449.95
HM-14 Extra TTP microphone		59.00	
UT-28 Digital code squelch		39.50	
UT-29 Tone squelch decoder		46.00	
HM-16 Speaker/microphone		34.00	
IC-900A Transceiver controller		639.00	569.95
UX-19A 10m 10W band unit		299.00	269.95
UX-29A 2m 25W band unit		299.00	269.95
UX-29H 2m 45W band unit		349.00	319.95
UX-39A 220MHz 25W band unit		349.00	319.95
UX-49A 440MHz 25W band unit		349.00	319.95
UX-59A 6m 10W unit		349.00	319.95
UX-129A 1.2GHz 10W band unit		549.00	499.95
IC-3200A 25W 2m/440 FM w/TTP		695.00	579.95
UT-23 Voice synthesizer		34.99	
AH-32 2m/440 Dual Band antenna		39.00	
AHB-32 Trunk-lip mount		35.00	
Larsen PO-K Roof mount		20.00	
Larsen PO-TLM Trunk-lip mount		22.00	
Larsen PO-MM Magnetic mount		22.00	
IC-1200A 10W 1.2GHz FM Mobile		699.00	629.95
IC-1271A 10W 1.2GHz SSB/CW Base		1269.00	1129
AG-1200 Mast mounted preamplifier		105.00	
PS-25 Internal power supply		125.00	114.95
EX-310 Voice synthesizer		59.00	
TV-1200 ATV interface unit		139.00	129.95
UT-15S CTCSS encoder/decoder		96.00	
RP-1210 1.2GHz 10W 99 ch FM xcvr		1529.00	1349
RP-2210 220MHz 25W repeater		1499.00	1329
RP-3010 440MHz 10W FM repeater		1299.00	1149

MasterCard VISA

Hand-helds	Regular	SALE
IC-2A 2-meters	289.00	259.95
IC-2AT with TTP	319.00	279.95
IC-3AT 220 MHz, TTP	349.00	299.95
IC-4AT 440 MHz, TTP	349.00	299.95
IC-02AT/High Power	409.00	349.95
IC-03AT for 220 MHz	449.00	389.95
IC-04AT for 440 MHz	449.00	389.95
IC-u2AT for 2m w/TTP	329.00	289.95
IC-u4AT 440 MHz, TTP	369.00	329.95

IC-u2A for 2m **w/o TTP**
Reg. $299 - **Closeout $259.95**

Accessories for micros - CALL

Aircraft band handhelds	Regular	SALE
IC-12AT 1W 1.2GHz FM HT/batt/cgr/TTP	473.00	419.95
A-2 5W PEP synth. aircraft HT	525.00	479.95
A-20 Synth. aircraft HT w/VOR	625.00	569.95

Accessories for all except micros	Regular
BP-7 425mah/13.2V Nicad Pak - use BC-35	79.00
BP-8 800mah/8.4V Nicad Pak - use BC-35	79.00
BC-35 Drop in desk charger for all batteries	79.00
BC-16U Wall charger for BP7/BP8	21.25
LC-11 Vinyl case for Dlx using BP-3	20.50
LC-14 Vinyl case for Dlx using BP-7/8	20.50
LC-02AT Leather case for Dlx models w/BP-7/8	54.50

Accessories for IC and IC-O series	Regular
BP-2 425mah/7.2V Nicad Pak - use BC35	49.00
BP-3 Extra Std. 250 mah/8.4V Nicad Pak	39.50
BP-4 Alkaline battery case	16.00
BP-5 425mah/10.8V Nicad Pak - use BC35	65.00
CA-5 5/8-wave telescoping 2m antenna	19.95
FA-2 Extra 2m flexible antenna	12.00
CP-1 Cig. lighter plug/cord for BP3 or Dlx	13.65
CP-10 Battery separation cable w/clip	22.50
DC-1 DC operation pak for standard models	24.50
MB-16D Mobile mtg. bkt for all HTs	25.99
LC-2AT Leather case for standard models	54.50
RB-1 Vinyl waterproof radio bag	35.95
HH-SS Handheld shoulder strap	16.95
HM-9 Speaker microphone	47.00
HS-10 Boom microphone/headset	24.50
HS-10SA Vox unit for HS-10 & Deluxe only	24.50
HS-10SB PTT unit for HS-10	24.50
ML-1 2m 2.3w in/10w out amplifier	**SALE** 99.95
SS-32M Commspec 32 tone encoder	29.95

Receivers	Regular	SALE
R-71A 100kHz to 30MHz receiver	$999.00	869.95
RC-11 Infrared remote controller	70.99	
FL-32A 500 Hz CW filter	69.00	
FL-63A 250 Hz CW filter (1st IF)	59.00	
FL-44A SSB filter (2nd IF)	178.00	159.95
EX-257 FM unit	49.00	
EX-310 Voice synthesizer	59.00	
CR-64 High stability oscillator xtal	79.00	
SP-3 External speaker	65.00	
CK-70 (EX-299) 12V DC option	12.99	
MB-12 Mobile mount	25.99	
R-7000 25MHz to 2GHz scan rcvr	1199.00	1049
RC-12 Infrared remote controller	70.99	
EX-310 Voice synthesizer	59.00	
TV-R7000 ATV unit	139.00	129.95
AH-7000 Radiating antenna	99.00	(11)

HOURS • Mon. thru Fri. 9-5:30; Sat. 9-3

Milwaukee **WATS** line: **1-800-558-0411** answered evenings until 8:00 pm Monday thru Thursday. **WATS lines are for Quotes & Ordering only, use Regular line for other Info & Service dept.**

All Prices in this list are subject to change without notice.

Order Toll Free: 1-800-558-0411

In Wisconsin (outside Milwaukee Metro Area) 1-800-242-5195

AMATEUR ELECTRONIC SUPPLY® Inc.

4828 W. Fond du Lac Avenue; Milwaukee, WI 53216 • Phone (414) 442-4200

AES® BRANCH STORES — Associate Store

WICKLIFFE, Ohio 44092
28940 Euclid Avenue
Phone (216) 585-7388
Ohio WATS 1-800-362-0290
Outside Ohio 1-800-321-3594

ORLANDO, Fla. 32803
621 Commonwealth Ave.
Phone (407) 894-3238
Fla. WATS 1-800-432-9424
Outside Florida 1-800-327-1917

CLEARWATER, Fla. 34625
1898 Drew Street
Phone (813) 461-4267
No In-State WATS
No Nationwide WATS

LAS VEGAS, Nev. 89106
1072 N. Rancho Drive
Phone (702) 647-3114
No In-State WATS
Outside Nevada 1-800-634-6227

CHICAGO, Illinois 60630
ERICKSON COMMUNICATIONS
5456 N. Milwaukee Avenue
Phone (312) 631-5181
15 min. from O'Hare!

UoSATs: The British Connection Part 2



University of Surrey's Contributions to Hamsats

by Robert J. Diersing N5AHD

Whole-orbit Telemetry Format

In late 1985 and early 1986, both UoSAT spacecraft began to operate under the control of a diary program stored in the on-board computer (OBC). This control program allowed much more flexibility in scheduling the activities of the OBC and data types transmitted on the downlinks. Consequently, whole-orbit telemetry surveys are transmitted very frequently from both spacecraft. The increased frequency of transmissions of whole-orbit data (WOD) make it more desirable to be able to decode and analyze this data. The amateur satellite enthusiast can thus observe the measurements made by onboard sensors when the spacecraft is not within range of his or her ground station. It is important to understand that the whole-orbit data is merely an extraction from the standard telemetry channels that has been stored in the OBC memory.

The amount of OBC memory available for data storage is about 8K for UoSAT-1 and 32K for UoSAT-2. The duration of the survey is under control of the OBC as loaded by the UoS command station. If whole-orbit data is transmitted, the status message transmitted by the command diary will give the date and time of collection and the channels included in the survey. Note that UoSAT-1 and UoSAT-2 computer status messages shown in Figures 1A and 2A include data related to whole-orbit data collection. They show the time WOD collection began and what channels are included. Typical whole-orbit data from UoSAT-1 and UoSAT-2 can be found in Figures 1B and 2B, respectively.

Number of WOD Channels	UoSAT-1 High Serial	UoSAT-2 High Serial
1	0E48	
2	0720	
3	04C0	
4		07E8
8		0FD8

Table 1. The highest observed line serial numbers in WOD surveys for both spacecraft.

WOD Header Lines

There are some important observations to make about WOD surveys. First, each line consists of a four-digit line serial number followed by from one to eight three-digit telemetry channel values and a two-digit checksum. The only exception is the first line, serial number 0000h. In this line the telemetry channel value positions contain the channel numbers of the channels included in the survey. An inspection of the UoSAT-2 sample will verify this. Spaces have been inserted for readability.

0000 011 037 038 039 02

It should be noted that the channel numbers also appear in the status message. However, the date and time of collection can only be obtained from the status message and is not contained in the survey data itself.

The time span between successive lines is determined by multiplying the line serial number increment by the time required to digitize and transmit a standard telemetry frame at the current downlink data rate. Considering the usual downlink data rate of 1200 bauds, the digitize-and-transmit time for UoSAT-1 is 5.28 seconds, and for UoSAT-2 it is 4.84 seconds. Thus, the time between lines 0008h and 0010h in the UoSAT-1 example is (0010h − 0008h) × 5.28 and (0010h − 0008h) × 4.84 for the same lines in the UoSAT-2 example. The duration of a WOD survey can thus be determined by multiplying the highest line serial number by the same factors of 5.28 and 4.84. Various maximum line serial numbers recently observed are shown in Table 1. Both the time between measurements (lines) and the duration must, of course, be considered by any program that will plot the data.

Interleaved Transmission Scheme

The examples in Figures 1B and 2B were only short extractions from an actual WOD survey. Their intent was to show the general format for WOD. A typical survey from UoSAT-1 might consist of lines 0000h through 04C8h while one from UoSAT-2 could have lines 0000h through 0FD8h. The larger number of lines from UoSAT-2 is a result of the larger amount of memory available in which to store the survey. In actual practice, however, multiple sets of lines are transmitted as shown in Figure 3.

The data set with serial numbers 0001h through 0FD9h is transmitted following the data set with serial numbers 0000h through 0FD8h. There may also be a 0002h through 0FDAh set. The previous discussion of time between measurements still holds; i.e., the time between lines 0008h and 0009h is 4.84 seconds since the difference between serial numbers is one. The data is downlinked in this interleaved fashion so that burst errors during downlink reception can be repaired with the following set of "nearby" data points. This feature is particularly useful when observing the WOD in real time as the UoS command station does.

Checksum Validation

In order to verify the checksum, each pair of ASCII characters is taken as a hex byte value and summed. Using modulus 256 arithmetic, the summation should produce a constant result. In the case of UoSAT-1 whole orbit telemetry, the constant value is AAh, which is 170 decimal. For UoSAT-2 the value is BBh, which is 187 decimal. An example of the checksum validation procedure follows. It was taken from the UoSAT Spacecraft Data Booklet.[6]

```
COMMAND DIARY V1.1 IN OPERATION
UNIVERSAL TIME IS 12:54:42
DATE 28/02/88
ATED
MEMORY WASH POINTER AT 1FB5H
LAST CMD SENT BY COMPUTER WAS 29H TO 1
LAST CMDORECD BY COMPUTER WAS 7DH TO 0 WITH DATA 00H

CURRENT WOD COMMENCED AT 00:00:00
DATE 28/02/88
SURVEY INCLUDES CHANS 03,13,28,
```

```
0000003013028 6C
0008013733768 2
0010023733769 A
0018023733761 A
0020013733769 A
0028013733769 2
0030013733758 B
0038013733768 2
0040013733767 A
0048013733767 2
0050013733766 A
0058013733766 2
0060013733765 3
0070023733764 9
0078023733764 1
0080033733763 8
0088023733773 0
0090023733772 8
0098023733772 0
00A0023733771 8
00A8023733771 0
```

Figure 1. Computer status information (1A) and Whole Orbit Data (WOD) (1B) collected from UoSAT-1. Note the status information includes start time and date of the WOD and specifies channels on which data has been collected.

```
COMMAND DIARY V4.8 IN OPERATION
UNIVERSAL TIME IS 03:49:27
DATE 28/02/88
AUTO MODE IS SELECTED
10 RAM ERRORS AT D519H
SPACECRAFT SPIN PERIOD IS -0058H SECONDS
LAST CMD SENT BY COMPUTER WAS 40H TO 1
LAST CMD RECD BY COMPUTER WAS 6DH TO 0 WITH DATA 00H

CURRENT WOD COMMENCED AT 00:00:00
DATE 28/02/88
SURVEY INCLUDES CHANS 37,38,39,47,48,49,57,58,

****!!!!!NEWSFLASH!!!!!****

WOD-DATES ONE WEEK OLD, CHANNELS OK
DE PA3BHF

DIGITALKER ACTIVE
```

```
0000003703803904704804905705 8C
0008424472503465501466494488 12
0010424472503459501466494488 16
0018424471502456500463494488 15
0020424471502456500463494488 0F
0028424471502452500463494488 09
0030424471502451500463494488 02
0038424471502449500462494488 03
0040423471502448500462494488 FD
0048423471502447500462494487 F7
0050423471502447500462493487 F0
0058422470502449496246349348 753
0060422470502445499461493487 4D
0068422470502444499461493487 46
0070421470502443499461493487 40
0078421470501443499461493487 39
0080421470501442499460493487 33
0088420470501442499460493487 2C
0090420469501441499460493486 2D
0098419469501440498460493486 2E
00A0419469501440498459493486 2D
00A8419469501440498459493486 25
00B0418469501439498459493486 25
00B8418469500439498459492486 1F
```

Figure 2. Computer status (2A) and Whole Orbit Data (2B) from UoSAT-2.

Consider the WOD telemetry line:

0088511449621693FF

Take this line and add a zero ('0') in front of each three-digit telemetry value to get:

00 88 05 11 04 49 06 21 06 93 FF

Add together the first digit from each pair (remembering A = 10, B = 11, etc.) and multiply by 16:

16 × (0 + 8 + 0 + 1 + 0 + 4 + 0 + 2 + 0 + 9 + F) = 624

Add together the second digit from each pair:

0 + 8 + 5 + 1 + 4 + 9 + 6 + 1 + 6 + 3 + F = 58

Add these two previous results together, divide by 256, and note the remainder.

(624 + 58) ÷ 256 = 2 with remainder 170

Lines producing the correct result when subjected to the validation procedure should represent correct data. The UoSAT-2 WOD should produce a remainder of 187 (BBh).

Merging Data from Multiple Orbits

Rarely can a complete WOD survey be captured in a single pass. This is usually due to a combination of two factors. The first is marginal reception due to low elevation passes and/or local interference with the downlink signal. The second is the switching of the WOD on and off the downlink by the OBC resulting in insufficient data capture.

The solution to this problem lies in the merging of data from orbits where the same WOD survey has been transmitted. Care must be taken that the WOD is from the same survey as indicated by the OBC status message. Table 2 shows data from several orbits collected at my station.

For UoSAT-2, a new WOD collection had already begun for the UTC day prior to the first visible pass. This can be seen by referring to the UoSAT-2 data in the preceding table. Note that the highest line serial number for orbit number 12089 is 090Ah, and for orbit number 12090 it is 0D99h. This is because WOD collection was in progress when the data was captured. When monitoring the downlink in real time, "WHOLE ORBIT DATA COLLECTION IN PROGRESS" will be seen in the OBC status messages until the survey has been completed. For listeners in the United States, the best orbits for WOD collection will be the morning passes, since the survey will have been completed by then. Occasionally, a new WOD survey will start around noon UTC, but this is not common.

The same comments apply to UoSAT-1 with one notable exception. The difference is that frequently a new WOD survey is initiated between passes visible in the US, since this is when UTC midnight occurs. This can be seen in the preceding table. Orbit number 27162 occurs on 08/25/86 while orbit number 27163 occurs on 08/26/86. The highest line serial number is again lower on orbit 27163, indicating a WOD survey is in progress.

A Look Ahead

The UoSAT Spacecraft Engineering Research Unit at the University of Surrey (UK) is now building a third UoSAT-OSCAR spacecraft–UoSAT-C. NASA has agreed to provide a launch for UoSAT-C on a DELTA launch vehicle currently scheduled for late 1988. The DELTA should place UoSAT-C into a 43-degree inclination, 500 km circular orbit.

Like UO-9 and UO-11, UoSAT-OSCAR-C will support a world-wide user community of engineers, scientists, educators and communicators. If all goes according to plan, UO-C will provide spacecraft housekeeping telemetry, long-term telemetry surveys, results from on-board experiments, news bulletins and communications facilities on a single downlink through packet-radio techniques. The UoSAT Spacecraft Research Unit will finalize and publish communications modem and protocol details as soon as possible to allow ground stations to equip themselves.

UoSAT-C, like the previous UoSAT missions, will have a strong element of international collaboration–specifically with members of AMSAT-UK, AMSAT-NA in the US and Canada, VITA, Quadron, NASA, the British National Space Centre and the European Space Agency.

Store & Forward Communications

Since 1983, UoSAT has played a major role in an international collaborative project developing cost-effective digital store-and-forward satellite communications techniques. The UoSAT-OSCAR-11 Digital Communications Experiment (DCE)—funded by the Volunteers In Technical Assistance (VITA) and built by VITA/AMSAT volunteers in the USA, UK and Canada—provided the first operational tests of store-and-forward PACSAT communications within the Amateur Satellite Service. Drawing on the operational and engineering data gained from the DCE, UoSAT and VITA are developing a high performance digital store-and-forward communications payload specially tailored for use by inexpensive ground stations. To test this payload, UoSAT-C will carry the PACSAT Communications Experiment (PCE). The PCE will be openly accessable to Radio Amateurs operating in the 2m and 70cm bands (Mode J). VITA is seeking additional frequency allocations outside the amateur bands to allow limited use of the UoSAT-C PCE by VITA ground stations in remote areas to provide technical assistance and disaster relief.

Radiation Studies Experiments

Microprocessor-controlled payloads such as the PCE cannot be built without VLSI semiconductors, and most recent and affordable VLSI devices have not yet been tested for space use. UoSAT-C will host several experimental payloads studying the effects of the space radiation environment on VLSI devices.

•Cosmic Particle Experiment (CPE)—comprising an array of large-area PIN diodes, will detect energetic particles which cause single event upsets (SEUs) in VLSI circuits (such as high-density RAMs).

•CCD Single Event Upset Experiment—(CCD-SEU) comprising an enclosed Charge-Coupled Device (CCD) array, will detect energetic cosmic particles and evaluate the effect of SEUs on CCD imagers. This data is of particular importance for scientists using sensitive CCDs as star sensors.

•Total Dose Experiment (TDE)—using special FETs located around the spacecraft, will measure the total radiation dose accumulated by the on-board subsystems and payloads. These dose measurements will allow engineers to assess the shielding properties of the spacecraft structure, and to correlate changes in LSI-device power consumption and performance with total radiation dose.

```
0000011037038039O2
0008345439481513 91
0010344439481513 8A
0018344439481513B2
0020344439481513 7A
0028344439481513 72
0030343439480513 6C
0038343439480513 64
.....
0FD033244047451 0D6
0FD833244047451 0CE

0001345439481513 98
0009345439481513 90
0011344439481513 89
0019344439481513 71
0021343439480513 6B
0029343439480513 63
0041343439480513 5B
0049342439480513 54
.....
0FD1332440474510D6
0FD9332440474510CE
```

Figure 3. Example of multiple data sets from UoSAT-2. UoSAT 2 has 32K memory for data collection versus 8K on UoSAT-1.

Satellite Technology Experiments

UoSAT-C will carry a range of satellite technology experiments associated with power systems, on-board data handling (OBDH), attitude determination, control and stabilization (ADCS) and RF modulation.

•POWER—The spacecraft will be powered from GaAs solar cells and will include experimental patches of novel GaAs, InPe and Si solar cells with a variety of newly-developed cover-slides. The performance of these cells will be monitored throughout the mission as a function of radiation dose. The spacecraft onboard computers will constantly monitor and adjust the Battery Charge Regulator and Power Conditioning Module to optimize power conversion and storage efficiency.

•OBDH—UoSAT-C will include several computers. In addition to the primary RCA1802 on-board computer (OBC-1) running DIARY-type software, there will be a more powerful 80C86-based OBC-2 supporting complex attitude control algorithms and spacecraft data networks. Four TRANSPUTERS in a parallel-processing array will be available for highly sophisticated on-board image and data processing, and the PCE will employ an 80C186-family computer to manage high-speed communications links and several megabytes of RAM.

A wide range of memory devices using different technologies and architectures will make up a total on-board capacity of around five megabytes of RAM. The radiation-induced effects on the processors and associated memories will be monitored and evaluated throughout the lifetime of the spacecraft. The network of computers on UoSAT-C will make this spacecraft the most compu-

UoSAT-1 Data				UoSAT-2 Data			
Orbit No.	Date	High	Serial	Orbit No.	Date	High	Serial
27162	08/25/86	049A		12089	06/07/86	090A	
27163	08/26/86	0343		12090	06/07/86	0D99	
27170	08/26/86	0722		13096	06/07/86	0FD0	
27171	08/26/86	0732		12097	06/07/86	0FD9	
				13098	06/07/86	0FD8	

Table 2. A summary of UoSAT data collected at the author's location (27.28N, 97.24W).

tationally powerful of its class and will support demanding experiments in advanced spacecraft attitude determination and control, data communications and image processing.

•ADCS—The 43-degree inclination, non-sun-synchronous nature of the UO-C orbit will necessitate the use of new attitude determination and control mechanisms to maintain accurate Earth-pointing. In addition to more complex attitude control algorithms executed by OBC-2, improved analog and digital sun sensors and Earth horizon sensors are being developed at UoS for the mission.

•DSP—If time and resources permit, a Digital Signal Processing Experiment may be included on UO-C to evaluate modulation/demodulation schemes.

A new concept of highly modular construction has been developed and is under test for UoSAT-C. This new, modular structure should result in much improved utilization of the available spacecraft envelope, greater ease of assembly and integration, and allow a more rapid response to future launch opportunities.

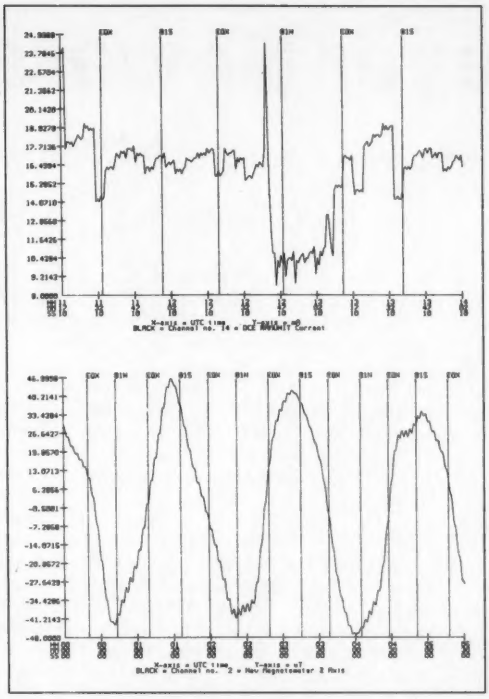

Figure 4. Two examples of Whole Orbit Data plotted against time. 4A shows magnetometer readings over 5½ hours, and 4B illustrates variations of the Digital Communications Experiment (DCE) RAM unit's current demand in milliamperes.

For More Information

Information about UoSAT operations can be obtained by copying the bulletins transmitted by the satellites. Examples of bulletins can be found in Figures 1B and 2B. These bulletins are usually updated on Thursdays so listening on the weekends will provide the latest information. The bulletins transmitted by UoSAT-2 are longer than those sent by UoSAT-1 since there is more RAM available for storing the bulletin text. The bulletins contain important information for all operational satellites.

Orbital information can be obtained from a variety of sources. The most popular method is to run predictions with the aid of a computer program. In the UK, programs for various microcomputers are available on both diskette and cassette tape from AMSAT-UK, 94 Herongate Road, Wanstead Park, London, E12 5EQ. In the US, programs are available for a number of microcomputers from AMSAT-NA Software Exchange, Box 27, Washington, D.C., 20044. The reference elements sets are available through the various AMSAT nets and publications.

The UoSAT Newsletter is published periodically by the University of Surrey Electrical Engineering Department. It is sent to those who have a record of serious interest in using the UoSAT spacecraft. A complete description of the UoSAT-1 experiments was given in the August/September 1982 issue of *The Radio and Electronic Engineer* published by the Institution of Electronic and Radio Engineers, London. Another comprehensive description of UoSAT-1 can be found in *UoSAT: The University of Surrey Satellite Project* published by the UoS Department of Electrical Engineering. Another issue of *The Radio and Electronic Engineer* has recently been devoted to the UOSAT-2 spacecraft. Copies are available from AMSAT-NA and AMSAT-UK.

Publications available in the US containing information about UoSAT are *QEX/SAT* published by the American Radio Relay League, and *Amateur Satellite Report (ASR)* and the *AMSAT-NA Technical Journal (ATJ)* both published by AMSAT-NA. *ASR* is a membership service and is published every two weeks. *ATJ* is published twice yearly in January and July and contains high-level engineering and scientific papers related to amateur radio and other low-cost spacecraft projects. 73

Acknowledgements

The material in the sections on UoSAT-C Mission Profile and UoSAT-C Payloads is taken directly from the public announcement of the UoSAT-C mission prepared by Dr. Martin Sweeting, G3YJO, Director of Satellite Engineering at the University of Surrey, England.

References

1. Diersing, Robert J., "Microcomputer Systems for UoSAT Tracking and Data Acquisition", *Proceedings of the Fourth AMSAT Space Symposium*, November 1986.
2. "Processing UoSAT Whole-Orbit Telemetry Data", *Proceedings of the Fourth AMSAT Space Symposium*, November 1986.
3. *Computer Applications in Station Control and Processing for UoSAT-OSCAR-9 and UoSAT-OSCAR-11*, AMSAT-UK, July 1985.
4. "Microcomputer Processing of UoSAT-OSCAR-9 Telemetry", *QST*, August 1984, Page 23.
5. "A Satellite Data Display Station for National Science and Technology Week", *Proceedings of the Fifth AMSAT Space Symposium*, November 1987.
6. Sweeting, M.N., et. al., *UoSAT Spacecraft Data Booklet*, Department of Electronic & Electrical Engineering, University of Surrey, May, 1986.

N5AHD is Associate Professor of Computer Science at Corpus Christi State University, 6300 Ocean Drive, Corpus Christi TX 78412.

1988 Atlanta HamFestival

July 9–10, 1988 • Atlanta, Ga.
Georgia World Congress Center

• More than 30 forums, covering DXing, contesting, antennas and more! • Giant indoor flea market! • License exams both days! • Antique radio show! • Nearby lodging! • The sights and sounds of Atlanta!

For more information, call Roy Epps, K4UWO, at (404) 457-2916; access the Atlanta Radio Club Computer Bulletin Board at (404) 393-3083; or write to the Atlanta Radio Club, P.O. Box 77171, Atlanta, Ga. 30357

Buyer Beware!

But you don't have to be infallible

R.C. Lukaszewicz WD8RCL

Have you ever bought a piece of gear that did not live up to the seller's claims? There is a solution to get your money back or to recoup repair costs!

Buying used equipment carries the risk of inheriting someone else's troubles. Unfortunately, not all hams honestly represent their hand-me-downs. Here are some pointers to avoid being left "holding the bag."

I am not an attorney and I am not attempting to provide legal advice regarding the matters put forth in this article, but my experience could offer some valuable lessons.

The Transaction

A short time ago, I heard a ham announce over a 40 meter net that a five-year old, 25 watt, synthesized, two meter mobile was available for $165. I called him on the telephone to question the condition of the radio and if the price was negotiable. After speaking with the seller, I was convinced that the only flaw with the radio was a bulb that had reached the point of no return in the T/R meter. The price was not negotiable, and I believed that the radio functioned properly. Eventually, I followed through and made arrangements to examine the rig at a Swapmeet.

We met, and I examined the radio. Unfortunately, there were no provisions for testing the rig, and again I questioned the seller on its condition. I was given a verbal guarantee that nothing but the bulb was inoperative. Also, the seller claimed he had used the rig daily in his home without a problem. I thought that since this statement came from a fellow amateur, it was good enough for me. I paid the owner his full asking price of $165 in cash.

The Ultimate Test

Upon arriving home, I immediately connected the unit with my Bird wattmeter in line. I quickly discovered that the maximum output power was a mere eight watts, the T/R meter was not operating in the receive mode, and there was objectionable audio distortion on receive.

Immediately I called the previous owner and explained the problems. He agreed to make amends and reluctantly agreed that the T/R meter was not functioning on receive. We agreed to talk the following day with information on repair options.

The next day I was armed with as much information I could accumulate for the repair cost of the unit on short notice. I called the previous owner again and courteously asked that he either repay the cost of the unit or provide me with a modest $45 to partially cover repair costs (one hour of labor at the original equipment manufacturer).

The seller said that he would not take the radio back and would not pay the $45 for partial repairs. In closing, he said that I had purchased the rig "as is" and had to live with the problems. I responded that I did not buy the radio "as is." I had a verbal guarantee, and I believed it was now necessary to take him to Small Claims Court to resolve the matter.

Preparation for Court

I immediately prepared a letter to the previous owner, which included all the facts of our dealings, and sent it via registered mail and requested a return receipt. The letter was refused, which is an option of the addressee. I then filed a court claim for the sum of $45 for the in-factory repair, $21 for the estimated replacement of the final power amplifier, and $20 court costs for a total of $86.

I then obtained a written quote from the manufacturer highlighting the cost of examining the radio. I obtained the FCC rule book and highlighted Part 97, ownership Subpart-C Technical Standards, section 97.67, Maximum authorized transmitting power subsection(a) and subpart E-Prohibited Practices and Administrative Sanctions, section 97.121, False Signals subsection(a).

I gathered together the equipment specification sheet, the radio, power supply, antenna, Bird wattmeter and associated cables to demonstrate the radio in court if necessary.

Trial Day

At the trial I informed the court that the case was a matter of principle. I felt I could prove that the radio I had purchased was sold with the knowledge of it being a defective radio. I stated the facts, presented the refused, unopened registered letter, Specification Sheet, ARRL/FCC rule book, equipment examination estimate, and radio. The seller simply stated to the court that he was unaware of any problems with the radio.

I pointed out the meter on the face of the radio, and said that I felt it had to have been observed by the previous owner. I then pointed out that, per the rules and regulations, that the seller would have been operating illegally by not knowing his output or by transmitting false signals into a repeater by not having the T/R meter working. I then offered to set up the rig and demonstrated the power output deficiency.

This was all that was necessary for the court to rule in my favor. I received the full award of $66 plus court costs that I sought. I ultimately repaired the T/R meter and audio problem myself, with the power problem yet to be tackled.

Caveat Emptor

Here are some common sense guidelines to follow when considering a purchase of used gear.

- Thoroughly quiz the seller about the condition of the piece of equipment. Make certain about the condition of the gear before buying.
- Ask the seller if he would refund all monies if you are not totally satisfied with the equipment.
- Be certain to obtain the seller's complete name, address, phone number and call sign.
- Ask the seller if he will take a personal check with proper ID. Some sellers are willing to take a check if they believe the equipment's damage was described properly. On the other hand, some amateurs have been inconvenienced by bad checks.
- Ask for a demonstration on the spot if possible.
- If you purchase through the mail, "sight unseen," be sure the seller will provide a return privilege in writing.

The Small Claims laws are different in many States, so check the options. Keep in mind, however, that it is not a joyous occassion to take a fellow amateur to court. Still, it is better to have the courts decide rather than taking the law into your own hands. Also, the time lost in attending court may not be worth the claim, and it then becomes a matter of principle.

Summary

It is wise to scrupulously check the piece of equipment as effectively as possible before buying it.

If you are ever taken taken advantage of, be patient in the effort to resolve the matter mutually between the buyer and the seller. If all else fails, the Small Claims Court may become the only alternative.

Remember, even if the equipment was bought "as is" and there are defects above and beyond what was bargained for, the damages may be reclaimed. If fraud can be proven, the seller of the equipment may have to rescind the deal or hand over the costs for the repairs.

Since laws in each state may be different, a consultation with an attorney may prove worthwhile before filing a claim.

Knowing there is solid recourse, I will continue to buy used gear and continue to look for those bargains.

WE SHIP WORLDWIDE

Barry Electronics Corp.

WORLD WIDE AMATEUR RADIO SINCE 1950

Your one source for all Radio Equipment!

For the best buys in town call:
212-925-7000
Los Precios Mas Bajos en Nueva York . . .

MAY We Help You With the Best in Commercial and Amateur Radios?
Kitty WA2BAP
See You June 5, Newington, CT

KITTY SAYS: WE ARE NOW OPEN 7 DAYS A WEEK.
Saturday & Sunday 10 to 5 P.M.
Monday-Friday 9 to 6:30 PM Thurs. to 8 PM
Come to Barry's for the best buys in town.

ICOM

IC-R71A, 751A, 781, 28A/H, 38A, 48A, Micro2/4, R-7000, IC-761, IC-375A, 275A/H, 3200A, 475A/H, 735, IC-900, IC-781



ONV Safety belts-in stock

YAESU

FT-767GX, FT-757GXII, FT-311 RM, FRG-8800, FT-736, FRG-9600, FT-211/711RH, FT-2700RH, FT 212/712RH.

SMART PATCH

CES Simplex Autopatch 510-SA Will Patch FM Transceiver To Your Telephone Great For Telephone Calls From Mobile To Base Simple To Use. 510SA/510SAII

KENWOOD

TS44OS/AT, R-5000, R-2000, TS-940 S/AT TM 221A/421A, TM-2570A/50A/30A, TR-751A, Kenwood Service /Repair, TM-721A, TS-711/811A TM3530A, TH205AT, TH215A, TW-4100A, TM-321A, TS140S, TS680S.

Antennas
A-S
Cushcraft
Hy-Gain
Hustler
KLM
METZ
Mini-Products
MULTIBAND
Mosley
MODUBLOX
TONNA

YAESU FT-23/73/33/727R FT-2/1/709R/H FT-1903/1123 FTH-2005/7005

ICOM IC2AT/12AT ICO2AT-32AT IC-O3/04AT IC-A2/U16

Land-Mobile H/T Midland/Standard Wilson Maxon Yaesu FTC 1123, FTC 1143 ICOM IC-M5 (Marine) M700 Tempo M-1

RF Concepts



Budwig ANT. Products
NEL-TECH DVK-100 Digital Voice Keyer
FLUKE 77 Multimeter
Media Mentors—
Amateur Radio Course $99.95

VoCom/Mirage/Alinco
Tokyo Hy-Power/TE SYSTEMS
Amplifiers &
5/8λ HT Gain
Antennas IN STOCK

PRIVATE PATCH IV, Duplex 8000



NYE MBV-A 3 Kilowatt Tuner

AMERITRON AMPLIFIER AUTHORIZED DEALER



ALINCO ALD-24T

SANTEC
ST-222/UP
ST-20T
ST-442/UP
HT-7

MFJ-989B

Soldering Station,
48 Watts, $68
MICROLOG-ART 1, Air Disk, SWL, Morse Coach

Computer Interfaces
Stocked: MFJ-1270B, MFJ-1274, MFJ-1224, AEA PK-87, MFJ-1278, PK-232 W/FAX.

Yaesu FTR-2410, Wilson
ICOM IC-RP 3010 (440 MHz)
ICOM IC-RP 1210 (1.2 GHz)
ICOM IC-RP 2210 (220 MHz)

Ten-Tec Tuner 229B

KANTRONICS
UTU, KAM, UTU-XT, KPC 2400, KPC IV

EIMAC
3-500Z
572B, 6JS6C
12BY7A &
6146B

Complete Butternut Antenna Inventory In Stock!

DIGITAL FREQUENCY COUNTERS
Trionyx, Model TR-1000, 0-600 MHz

AMP SUPPLY STOCKED
Long-range Wireless Telephone for export in stock

BENCHER PADDLES. BALUNS. LOW PASS FILTERS IN STOCK

MIRAGE AMPLIFIERS
ASTRON POWER SUPPLIES
Saxton Wire & Cable, Int'l Wire

HEIL EQUIPMENT IN STOCK

SANGEAN Portable Shortwave Radios

Tri-Ex Towers
Hy-Gain Towers & Antennas, and Roters will be shipped direct to you FREE of shipping cost.

AEA 144 MHz
AEA 220 MHz
AEA 440 MHz
ANTENNAS

BIRD
Wattmeters & Elements In Stock

New TEN-TEC
Corsair II, PARAGON, Argosy II

MAIL ALL ORDERS TO: **BARRY ELECTRONICS CORP., 512 BROADWAY, NEW YORK CITY, NY 10012 (FOUR BLOCKS NORTH OF CANAL ST.)**

New York City's LARGEST STOCKING HAM DEALER
COMPLETE REPAIR LAB ON PREMISES

"Aqui Se Habla Espanol"

BARRY INTERNATIONAL TELEX 12-7670
MERCHANDISE TAKEN ON CONSIGNMENT FOR TOP PRICES

Monday-Friday 9 A.M. to 6:30 P.M. Thursday to 8 P.M.
Saturday & Sunday 10 A.M. to 5 P.M. (Free Parking)

AUTHORIZED DISTS. MCKAY DYMEK FOR SHORTWAVE ANTENNAS & RECEIVERS.

Subways: IRT/LEX-"Spring St. Station"
BMT-"Prince St. Station"
IND-"F" Train-Bwy. Station"

Bus: Broadway #6 to Spring St.
Path—9th St./6th Ave. Station.

Commercial Equipment Stocked: ICOM, MAXON, Midland, Standard, Wilson, Yaesu. We serve municipalities, businesses. Civil Defense, etc. Portables, mobiles, bases, repeaters . . .

Wanted: Full time Technicians

We Stock: AEA, ARRL, Alpha, Ameco, Antenna Specialists, Astatic, Astron, B & K, B & W, Bencher, Bird, Butternut, CDE, CES, Communications Spec., Connectors, Cushcraft, Daiwa, Dentron, Digimax, Drake, Eimac, Encomm, HeilSound, Henry, Hustler (Newtronics), Hy-Gain, Icom, KLM, Kantronics, Larsen, MFJ, J.W. Miller, Mirage, Newtronics, Nye Viking, Palomar, RF Products, Radio Amateur Callbook, Saxton, Shure, Telex, Tempo, Ten-Tec, Tokyo Hi Power, Trionyx TUBES, W2AU, Waber, Wilson, Yaesu Ham and Commercial Radios, Vocom, Vibroplex, Curtis, Tri-Ex, Wacom Duplexers, Repeaters, Phelps Dodge, Fanon Intercoms, Scanners, Crystals, Radio Publications.

WE NOW STOCK COMMERCIAL COMMUNICATIONS SYSTEMS
HAM DEALER INQUIRES INVITED PHONE IN YOUR ORDER & BE REIMBURSED

COMMERCIAL RADIOS stocked & serviced on premises.

Amateur Radio Courses Given On Our Premises, Call

Export Orders Shipped Immediately. TELEX 12-7670

ALL SALES FINAL

CIRCLE 41 ON READER SERVICE CARD

A New Pulsed Bi-Phase Digital Communications System

19.2 kB in a 3 kHz bandwidth? Read on to see how!

by William Hotine K6HH

Amateurs have traditionally been the forerunners of radio progress. They have pioneered short waves in the 1920s, and single signal superhets and single sideband in the 1930s and 1950s. Well, the same pioneering can be done in digital telecommunication techniques!

This article describes a new technique of pulsed, bi-phase shift-keyed (BPSK) modulation that opens up the new field of narrow band digital radio. The system tailors new methods to fit the requirements of a narrow band system, and abandons the conventional method of 180° sinusoidal phase reversals, which produces a large number of sidebands and a consequent wide frequency spectrum of the signal. This wide bandwidth has been accepted in the past as a necessary evil of digital communication.

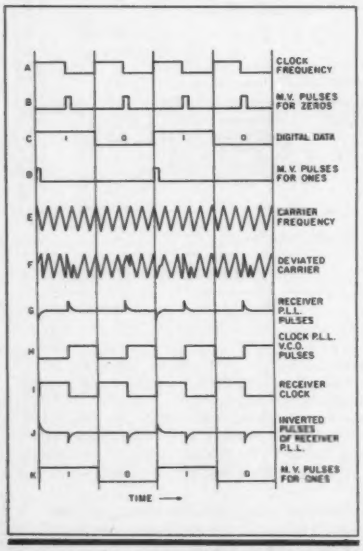

Figure 1. Waveforms used in the pulsed BPSK system and their timing relationships.

Small Phase Deviation

The key elements in the new pulsed BPSK modulation system are: 1) the very small phase angle deviation, and 2) the nanosecond linear transient of the phase modulation.

Hund[1] analyzed the sidebands generated by small phase deviations. At small phase angles of 0.2 radian (11.5°) or less, only two main sidebands, similar to AM sidebands, are generated. The modulating frequency f determines the sideband spacing from the carrier. The width of a sideband is the the modulating frequency variation, as in AM. Each sideband contains an equal amount of information. This allows PSK transmission on a single sideband (SSB) by using a small deviation angle and a bandpass filter to pass one sideband and reject the carrier and the other sideband. The width of this single sideband is reduced by a novel coding method that uses pulsed phase deviations of 0.02 radians (1.2°) to represent the digital information. The novel coding incorporates a timing pulse in every bit, which provides a coherent clock at the receiver enabling synchronous operation.

Synchronization

How does a receiver demodulate this single sideband without a reference carrier? By pulse coding the deviations to allow polarized pulsed detection in a digital phased locked loop (PLL) demodulator system. Binary "one" is encoded as a brief pulse of a leading phase angle at the start of a clock period and a brief pulse of a lagging phase angle at the middle of this clock period. Binary "zero" is encoded only as a brief pulse of a lagging phase angle at the middle of a clock period. This coding thus provides a timing pulse at the middle of every bit for directly transmitting the clock.

The phase deviations arise from the transitions at the rising and falling edges of the rectangular phase modulating pulses approximately 1μs long. The phase angle deviation during the nanosecond rise and fall of the modulating pulse is approximately 0.02 radian or 1.2°. The sine wave carrier is phase modulated during a very small portion of a single carrier cycle when using this method, so modulation products occupy a very small frequency spectrum.

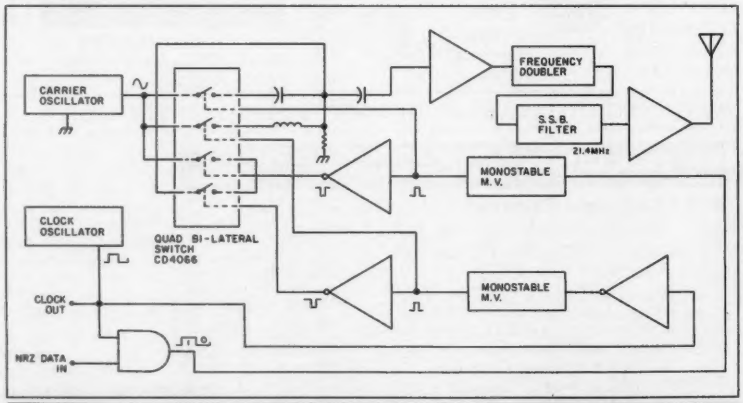

Figure 2. Transmitter block diagram.

TX Modulator

The wave shapes used in this system are shown in Figure 1. Figure 2 shows a block diagram of the transmitter's simple modulation system.

A sine wave oscillator feeds a one-volt signal through the quad bilateral switches to separate L and C phase shift circuits when these switches are pulsed. The sine wave remains unshifted during the intervals between the digital bit pulses. The square wave clock oscillator circuit drives an inverter, which in turn drives a monostable multivibrator (M.V.) to produce a "zero" modulating pulse at the middle of every clock cycle. This pulse drives a switch to connect the L phase shift circuit to produce a lagging phase angle.

The NRZ data input, clocked by the clock oscillator, drives one side of the AND gate while the clock frequency drives the other side. When a digital "one" appears at the gate, the AND gate drives a second monostable M.V. to produce a "one" modulating pulse at the start of a clock cycle. This pulse drives a switch to connect the C phase shift circuit to produce a leading phase angle.

Inverters driven by the pulses open the switches, which transmit the carrier directly for the pulses' duration. When no pulses are present at the inverter inputs, the inverters drive the two switches closed to transmit the carrier directly to the load R without phase shift. The load resistance is coupled to a high impedance input amplifier, the output of which drives a frequency doubler.

At this point, there is a carrier with two sidebands present. The sidebands are about 1% of the carrier amplitude. A crystal single sideband filter selects the upper sideband, and an amplifier feeds the narrow single sideband to the antenna.

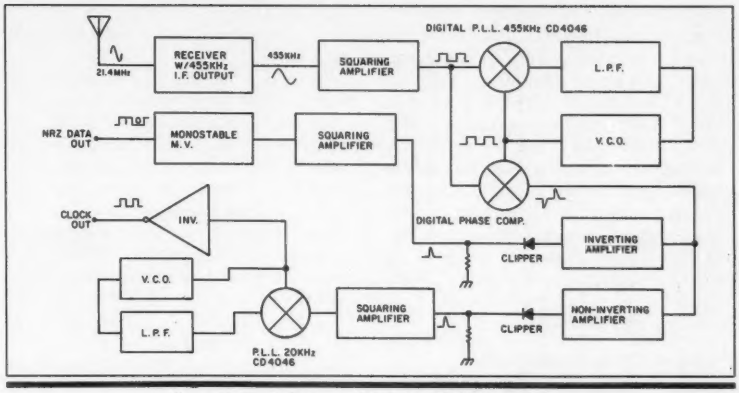

Figure 3. Block diagram of the pulsed BPSK demodulator.

At The Receiver

Here, the SSB sine wave signal at a 455 kHz intermediate frequency (IF) is amplified to make it a square wave at the logic level (Figure 3). The square wave is further squared by a Schmitt trigger, and its leading edge is compared to the leading edge of the PLL voltage-controlled (VCO) square wave in the digital phase comparator of a well-damped PLL by RCA. The signal square wave input is also compared in a second digital phase comparator with the PLL VCO. The second digital phase comparator gives a positive output pulse for a lagging phase angle input, and a negative pulse for a leading phase angle input. This allows unambiguous identification of digital "ones" and "zeros" without a reference carrier, not possible in previous PSK systems.

The digital PLL locks on to the frequency of the bit stream. An inverting amplifier then amplifies the negative output pulses denoting binary ones from the second phase comparator. A diode clipper removes the negative portions of the signal. The positive "zero" pulses are amplified to a square wave at the logic level. A PLL digital phase comparator then compares these pulses with the square wave output of the VCO at the clock frequency but 180° out of phase. An inverter brings the VCO output into phase and feeds the clock output terminal, thus furnishing a coherent clock for the receiver.

Bandwidth Limits

With this encoding method for a clock frequency f, a string of "zeros" gives the

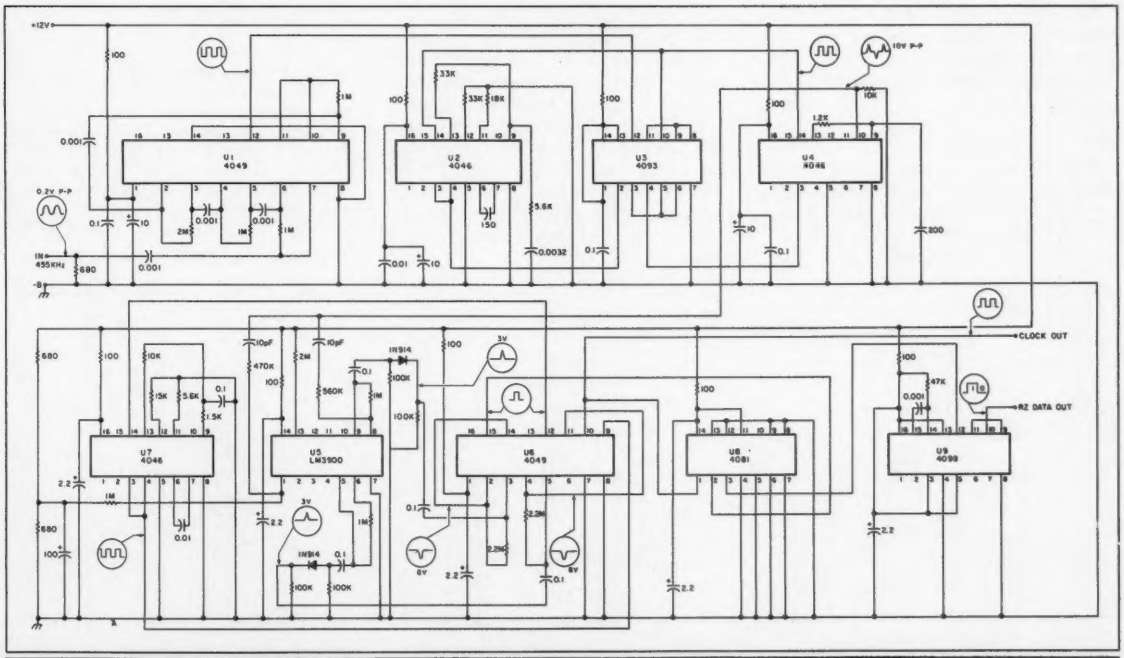

Figure 4. The transmitter schematic. It provides a pulsed BPSK output on 21.4 MHz.

inner sideband boundary as $f\Delta\theta$, where f is the modulating frequency, and $\Delta\theta$ is the phase deviation angle from the center frequency of the carrier frequency F. The outer sideband boundary is $2f\Delta\theta$, for a string of "ones," which have two pulses per clock cycle. Then $2f - f\Delta\theta = f\Delta\theta$, the width of the sideband. As modulation takes place during the nanosecond rise and fall times of the pulses used, f is effectively multiplied by two. Since the deviation used is only 0.02 radian, and there are 2π radians in a cycle of the carrier frequency, this results in $(2 \times 20{,}000 \times .02) \div 6.28 = 127$ Hz bandwidth for a clock frequency of 20 kHz.

Prototype Characteristics

A working breadboard prototype has been operated at a carrier frequency of 21.4 MHz and a clock frequency of 19.6 kHz, an adequate speed for digital telephony or transmission of computer data. These benefits come, however, by sacrificing the high speed performance of the conventional 180-degree phase shift systems. It's a trade-off of speed for economy, simplicity, synchronous operation, and bandwidth. The experimental system is capable of synchronous transmission and reception of 6-bit digital telephony in a bandwidth formerly associated with CW transmission!

The breadboard system has the following characteristics:

- Transmitter—Carrier frequency 21.388 MHz
- Upper side band—21.400 MHz
- Clock frequency—19.6 kHz
- Digital input RZ or NRZ—12V data
- Power output—10 mW
- Receiver—Hammarlund HQ-101A with 455 kHz IF 0.2V P-P
- Receiver bandwidth—3 kHz
- Demodulator accepts 455 kHz 0.2V P-P sine wave
- Demodulator output—RZ or NRZ 12V data, 12V clock

System Construction

I bread-boarded the experimental system using standard Radio Shack #276-174 2" x 6" experimenter boards, with the ends trimmed off to fit the bottom of standard 3" x 5" x 2" aluminum boxes on top of a piece of ⅛" thick corrugated carton material, and glued in place. The carton material reduces capacity to ground.

Figure 4 is the schematic diagram of the modulator and carrier generator units. Q_1 is a standard crystal oscillator for crystal Y_1, which has a frequency of 10.694 MHz. Q_2 is a source follower and delivers a sine wave at about 1 volt to the 1.2kΩ resistor at terminal 1 of U_1, a quad bilateral switch.

Narrow pulses from U_4 drive control terminals 5, 6, 12 and 13 of U_1. When terminals 8 and 9 of U_4 are driven by a narrow positive pulse from pin 10 of one shot M.V. U_5. Pin 6 of U_1 receives this pulse and closes the transmission gate between pins 8 and 9, which feeds carrier voltage from terminal 1 to C_1 and R_1, shifting the phase of the carrier to a leading phase angle. The complementary pulse from inverter pin 10 of U_4 at the same time opens the transmission gate between pins 3 and 4 of U_1, which had been closed to transmit the carrier directly to R_1. Also, when pins 12 and 13 of U_1 are driven by a narrow positive pulse from terminal 6 of U_5, pin 12 of U_1 receives this pulse and closes the transmission gate between terminals 10 and 11, which feeds carrier voltage from pin 1 to L_1 and R_1, shifting the phase of the carrier to a lagging phase angle. The value of R_1 determines the phase angle.

The complementary pulse from inverter #11 of U_4 at the same time, opens transmission gate between pins 1 and 2 of U_1, which had been closed to transmit the carrier directly to R_1. When no pulses appear at pin 6 and 12 of U_1, as in the time between pulses, gates between 1 and 2, 3, and 4 are closed by the inverters, so the carrier appears across R_1 without any phase shift. The dual M.V. at U_5 gives "one" pulses from pin 10, and "zero" pulses from #6, 1μsec wide.

The clock oscillator U_2 has a square wave output at pin 10, with a complementary output at #11. Frequency divider U_3 is driven at pin 1 by the complement at pin 11 of U_2, and pin 12 is a divide-by-two output of the clock frequency. The square wave output of #12 of U_2 is inverted at terminal 3 of U_4, and can then serve as a test program of alternate ones and zeros when applied to terminal 2 of U_6 by switch SW_1.

The clock frequency square wave from pin 11 of U_2 is sent through three AND gates of U_6 to delay its leading edge until later than the trailing edge of the "one" pulse at pin 2 of U_6. This delay prevents a false "AND" output from pin 3. A small capacitor might be necessary from #9 of U_6 to ground to increase this delay in cases where clocked data signals are delayed excessively by the digital processor in use.

Pin 5 of U_5 is driven by the trailing edge of the clock pulse to produce "zero" pulses from #6 at the middle of each clock cycle. Terminal 12 of U_5 is driven by a pulse from pin 3 of U_6 when the rising edge of a "one" pulse and the rising edge of the clock pulse are "ANDed" at pin 3. In this manner, a "one" pulse is delivered at #10 of U_5 and a "zero" pulse is delivered at #6 of U_5 at the proper times to accomplish the coding of the phase deviations of the carrier.

Output Coupling

The carrier voltage on R_1 drives a source follower Q_3, with high input impedance, and its low impedance output drives the amplifier Q_4, which in turn drives the frequency doubler Q_5. Output tank L_2 C_2 is tuned to the second harmonic of oscillator Q_1. A few turns on L_2 serve to couple to the output terminal at low impedance.

The output terminal and ground are connected by twisted pair to the input of the single sideband filter unit shown in Figure 5. The six-pole crystal filter centered at 21.400 MHz has a bandwidth of 12 kHz and drives a high impedance input amplifier Q_1. Amplifier Q_2 drives the output stage Q_3. Output tank L_1 C_1 is tuned to 21.400 MHz. A few turns on L_1 are used to couple to a few feet of antenna wire adequate for the 10-milliwatt experimental transmissions.

Bill K6HH received the callsign 2WQ in 1921 when he was 17. He worked as an RCA radio technician while studying engineering. Following work in radar development during World War II at ITT and Raytheon, he went on to work at Fairchild, General Dynamics, and Lockheed. He holds 32 patents and has had five articles published in technical journals.

Next Time: Part II Demodulator Details

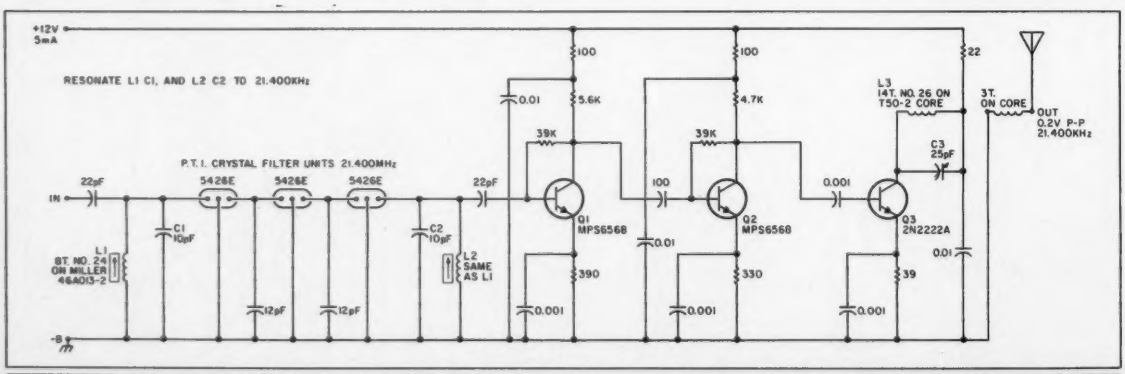

Figure 5. Filtering and antenna coupling details. Test transmissions generated approximately 10mW output.

THE MOST AFFORDABLE REPEATER

ALSO HAS THE MOST IMPRESSIVE PERFORMANCE FEATURES

(AND GIVES THEM TO YOU AS STANDARD EQUIPMENT!)

KIT, ONLY $675

WIRED $975

VHF OR UHF

FEATURES:

- **SENSITIVITY SECOND TO NONE! GaAsFET front end** on vhf models gives 12dB SINAD of 0.12uV (vhf), 0.15uV (220). UHF model 0.25uV std, 0.1uV with optional helical resonator preamp.
- **SELECTIVITY THAT CAN'T BE BEAT!** Both 8-pole xtal filter & ceramic filter for **>100dB at only ±12kHz.** Helical resonator front end to combat desense & intermod.
- **CLEAN, STABLE TRANSMITTER,** up to 18W output standard; 50W with accessory power amplifier.
- **FCC TYPE ACCEPTED** for commercial high band and uhf.
- **Courtesy beep,** field-programmable CW ID, flutter-proof squelch, automatic frequency control to compensate for off-frequency transmitters (all standard features).
- **Full range of options** available, such as autopatch, phone line or radio remote control, sub-audible tones, duplexers.

HIGH PERFORMANCE TRANSMITTERS & RECEIVERS FOR REPEATERS AUDIO & DIGITAL LINKS, TELEMETRY, ETC.



- **FM EXCITERS:** Kits $99, W/t $179. 2W continuous duty. TCXO & xtal oven options available.
- **TA51 for 10M, 6M, 2M, 150-174, 220 MHz.**
- **TA451 for uhf.**

FCC type accepted for commercial bands.

- Call for latest information on 900 MHz transmitters.
- **VHF & UHF AMPLIFIERS.** For FM, SSB, ATV. Output from 10 to 50 Watts. Several models, kits starting at $79.



- **R144/R220 FM RECEIVERS** for 2M, 150-174, or 220 MHz. **GaAs FET** front end, 0.12uV sensitivity! Both crystal & ceramic filters plus helical resonator front end for exceptional selectivity: >100dB at ±12kHz (best available anywhere)! Flutter-proof squelch. AFC tracks drifting transmitters. Kit $149, w/t $229.
- **R451 UHF FM RCVR.** Similar to above. Tuned line front end, 0.25uV sens. (0.1uV with optional hel. res. preamp). Kit $149, w/t $229.
- **R901 FM RCVR FOR 900 MHZ.** Triple-conversion, GaAs FET front end, 0.2uV sens. Kit $169, w/t $259.
- **R76 ECONOMY VHF FM RCVR** for 10M, 6M, 2M, 220. Without hel res or afc. Kits only $129.
- **Weather satellite & AM Aircraft receivers also avail.**

FCC TYPE-ACCEPTED TRANSMITTERS & RECEIVERS AVAILABLE FOR HIGH-BAND AND UHF. CALL FOR DETAILS.

GaAs FET PREAMPS at a fraction of the cost of comparable units!

LNG -(*) GaAs FET PREAMP

ONLY $59! Wired/tested

FEATURES:

- **Very Low Noise:** 0.7dB VHF, 0.8dB UHF
- **High Gain:** 13-20dB, depending on frequency
- **Wide Dynamic Range:** to resist overload
- **Stable:** new-type dual-gate GaAs FET

** Specify tuning range desired: 26-30, 46-56, 137-150, 150-172, 210-230, 400-470, or 800-960 MHz.*

LNW -(*) MINIATURE GaAs FET PREAMP

ONLY $24/kit, $39 Wired/tested

GaAs FET Preamp similar to LNG, except designed for **low cost & small size.** Only 5/8"W x 1-5/8"L x 3/4"H. Easily mounts in many radios.

** Specify tuning range desired: 25-35, 35-55, 55-90, 90-120, 120-150, 150-200, 200-270, or 400-500 MHz.*

LNS-(*) IN-LINE PREAMP

ONLY $79/kit, $99 Wired/tested

GaAs FET Preamp with features similar to LNG series, except **automatically switches out of line during transmit.** Use with base or mobile transceivers up to 25W.

**Specify tuning range desired: 120-175, 200-240, or 400-500 MHz.*

HELICAL RESONATOR PREAMPS

Low-noise preamps with helical resonators **reduce intermod & cross-band** interference in critical applications.

MODEL HRA-(*), $49 vhf, $84 uhf.

** Specify tuning range desired: 143-150, 150-158, 158-162, 162-174, 213-233, 420-450, 450-465, or 465-475 MHz.*

NEW HIGH-SPEED DIGITAL RF LINKS

You've waited a long time for a simple, reliable, **low-cost 9600 baud PACKET NETWORKING system.** Now you've got it! Our new MO-96 MODEM and direct FSK Transmitters and Receivers for 220 or 440 MHz interface directly with most TNC's. Fast diode switched PA's output 15 or 50W. **Call for complete info on the right system for your application.**

ACCESSORIES

- **COR-3** Kit. Control ckts and audio mixers needed to make a repeater. Tail & time-out timers, local spkr ampl, courtesy beep $49
- **CWID** Kit. Field programmable, timers, the works $59
- **TD-2 DTMF DECODER/CONTROLLER** Kit. Full 16 digits, switches 5 functions, toll call restrictor, programmable, much more. Great for selective calling too! $79
- **AP-3 AUTOPATCH** Kit. Use with above for repeater autopatch. Reverse patch and phone line remote control std. ... $79
- **AP-2 SIMPLEX AUTOPATCH TIMING BOARD** Kit. Use with above for simplex autopatch $39
- **MO-202 FSK DATA MODULATOR** Kit. Run up to 1200 baud digital signals through any fm transmitter with full handshakes. Radio link computers, telemetry gear, etc. $39
- **DE-202 FSK DATA DEMODULATOR** Kit for rcvr end of link $39

RECEIVING CONVERTERS

		Antenna Input Range	Receiver Output
		28-32	144-148
		50-52	28-30
		50-54	144-148
VHF		136-138	28-30
MODELS		144-146	28-30
		145-147	28-30
Kit with Case	$59	146-148	28-30
Kit less Case	$39	220-222	28-30
Wired w/case	$89	220-224	50-54
		222-224	28-30
UHF MODELS		432-434	28-30
Kit with Case	$69	435-437	28-30
Kit less Case	$49	432-436	144-148
Wired w/case	$99	432-436	50-54
		439.25	61.25
		902-928	422-448
		902-922	430-450

See catalog for full line of 2w transmitting converters for vhf & uhf. Kits only $79. Linear Amplifiers avail. up to 50 w.

- **Send $1 for 36 page catalog by return mail.** (Send $2.00 or 4 IRC's for overseas mailing)
- **Order by phone or mail • Min $3 S & H per order**
- **Use Visa, Mastercard, Check, or UPS COD.**

Our 25th Anniversary

hamtronics, inc.

65-J MOUL ROAD•HILTON NY 14468-9535

Phone:716-392-9430 *Hamtronics® is a registered trademark*

PART IV OF A FOUR PART SERIES

BY DR. WILLIAM HESS W6CK

DRIFTING ALONG THE TELEGRAPH TRAIL

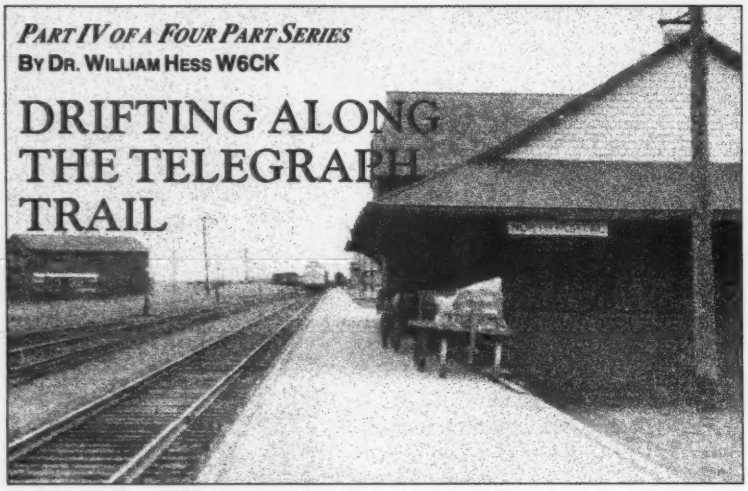

Memoirs of a Former Telegrapher

The Dodge Institute of Telegraphy located in Valparaiso, Indiana, was established early in this century. The Institute primarily trained American-Morse operators for employment by railroads; however, most of the operators employed by Western Union and Postal Telegraph were "home-grown" right on the premises. These 14-year-olds were employed as messengers and would practice American Morse on some available "pony" wire while waiting for a new batch of messages to deliver. They eagerly looked forward to working in the steam-heated world of the Morse Operator instead of pedaling their bikes out in the rain, snow and cold delivering messages.

Western Union messengers who brought a sufficient number of replys to messages delivered, were given a new bicycle as an award.

One routine death message to be delivered read:
"YOUR FATHER IS DEAD STOP COME AT ONCE"

By coincidence, the son to whom the telegram was addressed had also died on almost the same day as his father. The persistent messenger, who could already visualize himself on the new bike, would not leave the gathering following the funeral of the son until he had been given a reply telegram. Finally, the mourners composed this gem:
"I CANT COME STOP I IS DEAD TOO"

Dodge Institute

Poor farm boys looked upon telegraphy as about the only available means to avoid spending the rest of their lives walking between the handles of a plow on the farm. High school graduation was not necessary for entrance into the Dodge Institute.

Professor G.M. Dodge's Pierce Arrow Sedan, which could be seen parked in front of the Institute, was a definite clue that the Professor wasn't "hurting" financially. Such a vehicle cost five thousand dollars in 1925, equivalant to $25,000 in today's "cheap" dollars. Older readers will remember the distinctive headlights of the Pierce Arrow automobiles, which seemed to "grow" right out of the front fenders.

The telegraph wires of all three railroads operating through Valparaiso were routed through the dormitories of the Institute. The clicking of telegraph sounders was heard twenty four hours a day, no doubt the first use of sleep learning by anyone, anywhere.

The well trained graduates of the Dodge Institute, all of whom used the code commercially, never forgot how to read Morse code, even if they lived to be a hundred years old.

Later, when jobs for radio operators aboard ships and at shore stations became available, the school changed its name to Dodge Institute of Radio and Telegraphy, erected its own radio station and of course began teaching International Morse code and radio theory in addition to American Morse. During World War II, it trained hundreds of radio operators for the Armed Services.

The buildings are now part of Valparaiso University. During the fifty years the Institute was in operation, five large letters comprising the word DODGE were fastened over the doorway to the Main Building. When the school closed its doors forever and these letters were removed, the lack of sunlight behind them for half a century had indelibly etched the word "Dodge" into the stone building and that is the only trace left today of a school dear to the hearts of many a landline or radio telegrapher. Inquires relative to the Dodge Institute at Valparaiso University today are apt to be responded to with a blank stare by employees of the latter school.

Switchman Mooney

In 1949, I became acquainted with "Haywire Mac" McClintoc, a writer of short stories concerning railroads. He told me a true story about a boomer switchman named Mooney. He appeared one cold and blustery evening at a railroad switching yard in Chicago. McClintoc was a foreman of one of the switching crews there.

Mooney was in very poor condition. Due to participation in a druken brawl, he had a black eye and deep lacerations in his face. Dental problems were of no concern to him, he had no teeth. His clothes were ragged and his shoes had large holes completely through the soles. Nevertheless, the yardmaster was in need of switchmen, so Mooney was hired. He began work on the so-called "graveyard" shift beginning at midnight. Mooney immediately started cutting out cardboard soles for his shoes, utilizing the narrow switch-list forms available in the yard office. These forms were printed on a rather tough type of thin cardboard. The temperature that evening was ten below zero.

All went well throughout the night in switching cars, although a stop had to be made occasionally while Mooney half-soled his shoes with new pieces of carboard. However, at 5 AM, Mooney flashed a violent "wash-out" (stop) sign with his electric lantern to the rest of the crew. As foreman, McClintoc walked the length of a long string of box cars to determine the cause of this emergency signal and discovered that they had run over a hobo, completely severing the body. On the hobo's feet were a brand new pair of leather boots. Mooney was instructed to remain with the corpse while McClintoc went to the yard office to call the police and the coroner. When the latter arrived at the scene, he concluded that the case was a rather simple one, declaring that the hobo probably thought he was boarding a trian for warmer climes and had slipped on the abundant ice present in the yard and thus fell under one of the moving cars. The coroner then added one statement on his assessment of the accident and said "There's one thing I don't understand though and that is what this poor fellow was doing out in this kind of weather without any shoes."

Mac looked over at Mooney and saw that Mooney was wearing a brand new pair of high boots. The Lord works in mysterious ways.

Years later, Mac was walking down State Street in Chicago on a summer afternoon when someone he did not recognize called his name. The man was wearing a completely white suit, patent leather shoes, a Panama hat and a diamond ring with a stone in it about the size of a dime. The "stranger" turned out to be Mooney. Mooney, having had his fill of druken fights, missed meals and shoes with out soles, had turned into a "home guard" (a railroad man who stays on the same job for a long time) and accumulated many years of seniority.

A further postscript to this story is that at the time of my conversation with Mr. McClintoc, NBC Television had a weekly program featuring a different song writer each week. The writer would sing and play his more popular "hits" and explain how he happened to compose each song and so on.

I was struck by the extreme modesty of Haywire Mac in not mentioning to me, during our long visit, that he was a successful composer of popular songs. 73

National Tower Company

P.O.Box 15417 Shawnee Mission, KS. 66215

Hours 8:30-5:00 M-F Price Subject to Change Without Notice

913-888-8864

ROHN FREE BASE STUBS WITH EACH BX SERIES TOWER

25G	10' section	$56.50
25AG2 & 3	model 2 or 3 top section	$66.00
25AG4	model 4 top section	$73.50
45G	10' section	$133.00
45AG3 & 4	model 3 or 4 top section	$136.00
55G	10' section	$166.50
TB3	thrust bearing	$56.25
M200	10' mast, 2"o.d.	$13.50
BX-40	40'self supporting [6 sq.ft.]	$196.00
BX-48	48'self supporting [6 sq.ft.]	$250.00
BX-56	56'self supporting [6 sq.ft.]	$334.50
BX-64	64'self supporting [6 sq.ft.]	$431.50
HBX-40	40'self supporting [10 sq.ft.]	$226.50
HBX-48	48'self supporting [10 sq.ft.]	$308.00
HBX-56	56'self supporting [10 sq.ft.]	$392.50
HDBX-40	40'self supporting [18 sq.ft.]	$284.50
HDBX-48	48'self supporting [18 sq.ft.]	$384.50
	★ GUY WIRE SPECIAL ★	
3/16EHS	500' galvanized 7 strand	$40.00
1/4EHS	500' galvanized 7 strand	$50.00

HYGAIN/TELEX ANTENNAS

HF ANTENNAS — Tribands

TH3JRS	3 element 'Junior Thunderbird'	
TH5MK2S	5 element 'Thunderbird'	
TH2MK3S	2 element 'Thunderbird'	
TH7DXS	7 element 'Thunderbird'	
TH6DXX	conversion kit to TH7DXS	
EXP 14	Explorer 14 triband beam	
QK710	30/40 M conv. Exp 14	

Monoband

103BAS	'Long John' 3 element 10 mtr	
105BAS	'Long John' 5 element 10 mtr	
155BAS	'long John' 5 element 15 mtr	
204BAS	4 element, 20 meter	$299.90
205BAS	'Long John' 5 element 20 mtr	
7-1S	'Discoverer' rotary dipole 30/40mtr	
7-2S	'Discoverer' 2 elem. 40 meter beam	
7-3S	converts 7-2S to 3 elem. beam	

Multiband Verticals

18HTS	'Hy-Tower' 10 thru 80 meters	
14RMQ	roof mt kit for 12 AVQ,14AVQ and 18ATV/WB	
18VS	base loaded, 10 thru 80 meters	
12AVQS	trap vertical 10 thru 20 meters	
14AVQ/WBS	trap vertical 10 thru 40 meters	
18AVT/WBS	trap vertical 10 thru 80 meters	

Multiband Doublets

18TD	portable tape dipole 10-80 meters	
2BDQS	trap doublet 40 and 80 meters	
5BDQS	trap doublet 10 thru 80 meters	

VHF ANTENNAS — Beams & Verticals

23BS	2 meter 3 element beam	
25BS	2 meter 5 element beam	
28BS	2 meter 8 element beam	
214BS	2 meter 14 element beam	
64BS	4 element 6 meter beam	
V-2S	colinear gain vertical 138-174 MHz	
V-3S	colinear gain vertical 220 MHz	
V-4S	colinear gain vertical 430-470 MHz	
GPG2A	base, 2 mtr. ground plane 3 dB	

VHF & UHF Mobiles

HR144GRI	figerglass 2 mtr. 6dB gain 3/8-24 mt	
HB144GRI	HyBander 2mtr 6dB gain 3/8-24 mt.	
HB144MAG	HyBander 2 meter	
BN86	ferrite balum for 10-80 meters	

OSCAR LINK ANTENNA

215S	70cm, 435 MHz	
218S	Complete Oscar link system	

CUSHCRAFT ANTENNAS

AP8	8band ¼wave vertical	$152.00
A3	3 element triband beam	$246.00
A743	7 & 10 MHz add on kit for A3	$81.00
A744	7 & 10 MHz add on kit for A4	$81.00
4218XL	18 element 2 mtr, 28.8' boomer	$125.00
A4S	4 element triband beam	$344.00
AV4	40-10 mtr. vertical	$94.50
AV5	80-10 mtr. vertical	$111.00
ARX2B	2 mtr. 'Ringo Ranger'	$39.25
ARX450B	450 MHz. 'Ringo Ranger'	$39.25
A144-11	144 MHz. 11 ele. VHF	$50.50
A147-11	11 element 146-148 MHz. beam	$50.50
A147-22	22 element 'Power Packer'	$141.75
A144-10T	10 element 2 mtr. 'Oscar'	$54.00
A144-20T	20 element 2 mtr. 'Oscar'	$77.50
215WB	15 element 2 mtr. 'Boomer'	$81.00
220B	17 element FM 'Boomer'	$101.25
230WB	144-148MHz, 30 element	$216.00
32-19	19 element 2 mtr. 'Boomer'	$101.25
424B	24 element 'Boomer'	$81.00
10-4CD	4 element 10 mtr. 'Skywalker'	$124.75
15-4CD	4 element 15 mtr. 'Skywalker'	$145.00
20-4CD	4 element 14 MHz 'Skywalker'	$310.50

HUSTLER ANTENNAS

4BTV	40-10 mtr. vertical	$79.00
5BTV	80-10 mtr. vertical	$105.00
6BTV	6 band trap vertical	$124.00

ROTORS

Alliance	HD73 [10.7 sq.ft.]	$104.00
Alliance	U110	$47.00
TELEX	AR40 TV, 3 sq ft	CALL
TELEX	CD45-II [8.5 sq.ft.]	CALL
TELEX	HAM IV [15 sq. ft.]	CALL
TELEX	T2X [20 sq. ft.]	CALL

ROTOR CABLE

[2-18 & 6-22]	4080 - per foot	$0.18
[2-16 & 6-20]	4090 - per foot	$0.35
1108	RG8U Mini 8 low loss foam per foot	$0.17
	500' roll	$79.00
1198	RG8U Columbia superflex $31/100' or 500' for	$139.00

★ ★ CALL FOR PRICES ★ ★

unlden

SALE

BC175XL $159.90
16 Ch 11 band programmable, aircraft & weather, Ch lockout, auto search & squelch, scan delay, track tuning, priority, high/low scan speed. AC/DC.

BC50XL
$119.90
With battery pack & charger, 16 Ch 10 band, keyboard lock, channel lockout, memory backup, built-in delay, direct channel access, track tuning, battery low indicator, memory backup.

BC70XLT	20 Ch 10 band hand held	$159.90
BC100XL	16 Ch 9 band, aircraft hand held	$149.90
BC100XLT	100 Ch 11 band, hand held, aircraft	$199.90
BC200XLT	200Ch 12 band 800MHz Hand Held	$299.90
BC145XL	16Ch 10 band, weather, AC/DC	$92.90
BC175XL	16 Ch 11 band, aircraft, AC/DC	$159.90
BC210XLT	40 Ch 11 band, weather, aircraft AC/DC	$179.90
BC560XL	16 Ch 10 band mobile	$99.90
BC580XLT	100 Ch 11 band mobile, weather, air	$219.90
BC760XLT	100 Ch 12 band w/800MHz mobile	$279.90
BC800XLT	40 Ch 12 band 800MHz, AC/DC	$239.90

TS2 . . . $269.90
75 channel 12 band, 800 MHz, aircraft & weather, TurboScan®, bank scanning, instant weather, programmable, accuseek, permanent backup, direct access, with AC adapater, DC cord & mobile mt bracket.

INF1 . . . . $159.90
WITH TURBO SCAN® preprogrammed by state to receive any type of police transmission, plus instant weather. programmed for all 50 states. Turbo Scan® scans at 40 Ch per second, DC power cord.

TS1 . . . . . **$199.90**
35 Ch 11 band, weather & aircraft, AC/DC.

INF2 . . . . . **$179.90**
Plus hear road & medical services, & amateur radio.

RANGER
10 meter transceiver, 25 watt, can be programmed to split transceive, SSB, CW, AM, FM, programamble scanning, fully automatic noise blanker, 2½H, 7¾W, 11D.



AR3500 . . . . $334.90

REGENCY LAND MOBILE
Utili-Com, 1 watt/2 Ch 2-way, lightweight, battery operated portable, w/flexible antenna, plastic case & battery charger. Supplied with itinerary frequency 151.625.

UC102 . . . . . $139.90

MAXON. . . .$26.95
Model 49SA - 49 MHz, FM 2-WAY RADIO hands free operation, voice activated transmit up to ½ mile. Batteries optional

model 49B $34.95
same features as 49SA except uses "AA" nicad batteries and comes with battery charger

TENNA PHASE III POWER SUPPLIES

PS3 . . . . . **$15.90**
Output: 13.8V DC - 3 amp constant 5 amp surge, electronic overload protection w/instant auto reset, fuse protected.

PS4 . . . . . **$19.90**
Fully regulated, 13.8 VDC - 4 amps constant with surge protection, overload protection w/instant auto reset.

PS7 . . . . . **$24.90**
Fully regulated, 7 amp constant,10 amp surge capacity.

PS12 . . . . . **$34.90**
Fully regulated, 10 amp constant 13 amp surge, electronic overload protection w/instant auto reset.

PS20 . . . . . **$64.90**
Fully regulated, 25 amp surge capacity, 13.8 VDC, 20 amp constant, with meter.

PS25 . . . . . **$79.90**
Regulated 4.5-15VDC-25 Amp constant 27 amp surge, instant auto reset, dual meter for current & voltage.

PS35 . . . . . **$99.90**
Same as above except, 35 amp constant, 37 amp surge, adjustable from 10 to 15 volts.

CIRCLE 323 ON READER SERVICE CARD

SAVE OVER 35%



PLUS 4™ SOFTWARE

Turn your home computer into a household finance organizer, learning center, and entertainment center. The Plus 4™ Software Package contains three floppy diskettes compatable with the Commodore® Plus 4™ computer. Due to special arrangements with the manufacturer, you save.

Software Package Contains: *Fun and Games* disk with more than 20 imaginative games for the whole family to enjoy, plus music and graphics selections. The second disk is *Utilities/Finance.* It can help you organize and maintain files, lists and information. The Finance section is designed to help you organize your personal and home finances and investments. The third disk is *Education.* A fun way for students to learn more about math, language, geography, science, history and more.

Compute the Savings! You don't need a computer to figure out this is an exceptional value...one that everyone in the family will enjoy.

Mfr. List Price $30.00

Liquidation Price/Set $19

Item H-3685-7235-294
S/H: $4.00 set

Credit card customers can order by phone, 24 hours a day, 7 days a week.
Toll-Free: 1-800-328-0609

SEND TO:
COMB Authorized Liquidator
1405 Xenium Lane N/Minneapolis, MN 55441-4494

Send ___ **Plus/4™ Software Set(s)** Item H-3685-7235-294 at $19 per set, plus $4.00 per set for insured shipping, handling. (Minnesota residents add 6% sales tax. Sorry, no C.O.D. orders.)

☐ My check or money order is enclosed. (No delays in processing orders paid by check.)

PLEASE CHECK: ☐ VISA ☐ ☐ ☐

Acct. No. _____ Exp. ___/___

PLEASE PRINT CLEARLY

Name _____

Address _____ Apt. #_____

City _____ State _____

ZIP _____ Phone (___)_____

Sign Here _____

Briefly Speaking: RS-232C

Understand what this term really means.

by W. Max Adams W5PFG

Contrary to popular belief, RS-232C is not a physical unit of electronic equipment. It is the Electronic Industries Association (EIA) *designation* of a standard interface for interconnecting digital equipment. "RS-232C" is an accepted "buzzword" which, like "Zeerocks" and "Clean-x," has a more lengthy name that completely describes EIA's recommendations. It is "Interface Between Data Terminal Equipment and Data Communication Equipment Employing Serial Binary Data Interchange." RS-232C is a much easier verbal mnemonic to cope with than IBDTEDCE-ESBDI!

The category Digital Equipment has two subcategories: Data Terminal Equipment (DTE), and, Data Communication Equipment (DCE). DTE is a machine that originates and/or receives digital data, such as a computer. DCE is a machine that provides functions to establish, maintain, condition and terminate digital data signals for transmission to another machine, such as a telephone modem or packet-radio Terminal Node Controller. The physical (hard-wired) connection (interface) between most of today's equipment is according to the popular Electronics Industries Association (EIA) RS-232C specification.

The EIA RS-232C standard defines four areas of data equipment interfacing:

1. Mechanical characteristics of the interface.
2. Electrical signals of the interface.
3. Signal functions.
4. Secondary functions for some applications.

The first three areas of the RS-232C specification are those of primary interest to the amateur radio or computer enthusiast.

The EIA RS-232C mechanical standard specifies:

1. Assignment of signals to connector pins.

PIN NO.	EIA CKT	SIGNAL DESCRIPTION	TYPICAL MNEMONIC	FROM DCE	TO DTE
1	AA	PROTECTIVE (FRAME) GROUND	GND	*	*
2	BA	TRANSMIT DATA	TD		*
3	BB	RECEIVE DATA	RD	*	
4	CA	REQUEST TO SEND	RTS		*
5	CB	CLEAR TO SEND	CTS	*	
6	CC	DATA SET READY	DSR	*	
7	AB	SIGNAL GROUND	SG	*	*
8	CF	RECEIVE LINE SIGNAL DETECTED	DCD	*	
9		RESERVED			
10		RESERVED			
11		UNASSIGNED			
12	SCF	SECONDARY RX LINE SIGNAL DET.		*	
13	SCB	SECONDARY CLEAR TO SEND		*	
14	SCA	SECONDARY TRANSMIT DATA			*
15	DB	TRANSMIT SIGNAL ELEMENT TIMING (DCE)		*	
16	SBB	SECONDARY RECEIVE DATA		*	
17	DD	RECEIVE SIGNAL ELEMENT TIMING		*	
18		UNASSIGNED			
19	SCA	SECONDARY REQUEST TO SEND			*
20	CD	DATA TERMINAL READY			*
21	CG	SIGNAL QUALITY DETECTOR		*	
22	CE	RING INDICATOR		*	
23	CI	DATA SIGNAL RATE SELECTOR (DTE)			*
24	DA	TRANSMIT SIGNAL ELEMENT TIMING (DTE)			*
25		UNASSIGNED			

232REV (880123)

Table 1. EIA RS-232C Mechanical standard pin-out designations and applications.

2. Female pins in the DCE connector.
3. Male pins in the DTE connector.
4. Maximum cable length of 50 feet.
5. Maximum cable capacitance of 2500 picofarads.

RS-232C standard input/output (I/O) connectors are commonly called "serial ports" where data bits are "shipped" in and out, one bit after the other. Baud rate (number of signal events per second), signal voltage (or current in some applications), and protocol (responses to data) in digital communication must be the same, thereby allowing individual data machines to understand each other.

One of the most often cussed and discussed RS-232C subject is its signal characteristics and functions. RS-232C was written to standardize telephone (wire line) interfacing. Its original application has been carried over into many other digital communication systems. Some RS-232C features are therefore not presently used. For example, "Ring Indication" is not required for packet-radio equipment interfacing. Table 1 lists RS-232C standard mechanical (pin-out), EIA circuit designation, signal description, common mnemonic and typical DCE/DTE application.

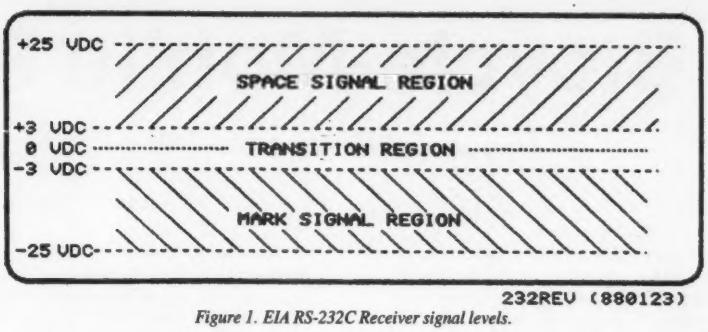

Figure 1. EIA RS-232C Receiver signal levels.

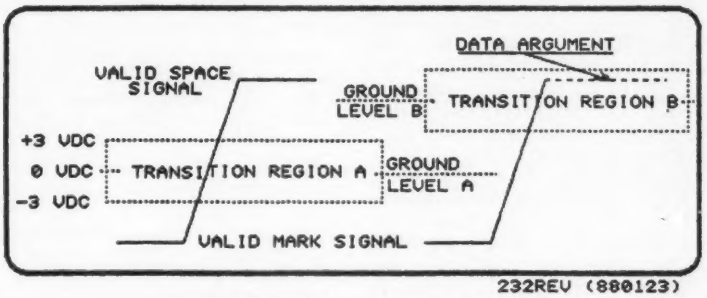

Figure 2. Unbalanced RS-232C ground signal conditions.

Connections

RS-232C mechanical standard is often misunderstood. For example, a DB-25 type connector isn't specified by RS-232C. It became a *de facto* "standard" because of its popular use. RS-232C pins one through seven (and Pin 20) are of major interest in amateur radio applications. Only four of these, however, are required in amateur packet-radio equipment interfacing: protective Ground (GND, Pin 1), Transmit Data (TD, pin 2) from DTE to DCE, Receive Data (RD, pin 3) from DCE to DTE, and Signal Ground (SG, pin 7).

Data signal voltage levels, according to the RS-232C standard, are shown in Figure 1. Negative signals between −3 volts and −25 volts are recognized as Mark signal conditions, and voltages between +3 volts and +25 volts are recognized as Space signal conditions. Mark and Space voltage levels do not have to be the same. For example, Mark signal voltage can be −5 VDC, and Space signal voltage can be +12 VDC. (Note: Mark and Space cannot be generally defined as "logic Zero" or "logic One" signals, or vice-versa, since this relationship is a function of each individual electronic system). Other readily available voltage levels can (and are) used, but often require "conditioning" to *safely* interface with other equipment. Signal voltages cannot reside in the Signal Transition Region and must be within their limits beyond the transition region.

Signal Ground (Pin 7) is common to both transmit data (TD) and receive data (RD) lines, which often results in a major disadvantage of RS-232C application. For example, consider a computer and modem using RS-232C signal level interface. Each unit, operated from its own DC power supply, can cause different reference (power and signal) ground levels at each end of the interface cable, as shown in Figure 2. Data between equipment with different reference levels can be "misunderstood," thereby resulting in program or information "glitches."

RS-232C standard signal current is specified to a level that will not burn up interfaced equipment due to faulty or improperly connected cables or connectors. The equipment can be damaged, but should not "smoke!" (In electronics, never say "never." Mr. Murphy's well-known laws often puts egg on one's face.)

Ham Shack Analogy

Using an RS-232C interface is somewhat like using a radio transceiver to interface with another ham radio station. The receiver is patched to the data source station transmitter, and the transmitter is patched to the destination station receiver. Both source and destination equipment "parameters" (i.e., frequency, communication mode, communication protocol, etc.) must be the same for mutual understanding. RS-232C does not specify baud rates, communication mode, or communication protocol.

RS-232C does, however, provide flexible equipment interfacing and some interesting discussions on your local repeater!

Briefly speaking, the primary purpose of EIA's RS-232C standard is a reference for system design. Manufacturing considerations produce a wide variety of connectors, special signals and voltage/current levels. Hopefully, the equipment manufacturer provided documentation to aid the user.

The functions of RS-232C standard signals are well documented.

Pin 1—PROTECTIVE GROUND.

Pin 2—TRANSMIT DATA (TD). Connect it to a receive INPUT.

Pin 3—RECEIVE DATA (RD). Connect it to a transmit OUTPUT.

Pin 4—REQUEST TO SEND (RTS). A signal from the data source that tells the associated (receiving) device it (the source) has data to be transmitted.

Pin 5—CLEAR TO SEND (CTS). A signal from the associated receiving equipment to the data source (transmit) equipment, it (the receiver) is ready to accept data input.

Pin 6—DATA SET READY (DSR). DSR is "asserted" (made available) on PIN 20, when the equipment is operational and ready to transmit and/or receive data. DTR (and DSR), in some applications, are jumpered at the cable connector and not physically connected to other equipment.

Pin 7—SIGNAL GROUND (SG). This is *not* the same as pin 1. Pin 7 is the "return" path that Mr. Ohm requires.

When all else fails, look at the reference material in the bibliography. It may well allow the reader to come up with the seventh answer to a six-way-QSO RS-232C question on your local repeater, or at the next brown-watering hole (coffee shop) QRM session.

1. *ARRL, "AX.25 Amateur Packet-Radio Link-layer Protocol, Version 2.0", October 1984.*
2. *Lyle Johnson WA7GXD, "Join the Packet-Radio Revolution, Parts I, II and III", 73 Magazine, Sept/Oct 1983, January 1984.*
3. *Margaret Morrison KV7D, et al, "Amateur Packet-Radio, Parts 1 and 2", Ham Radio, July/August 1983.*
4. *W. Max Adams W5PFG, "Briefly Speaking, Basic Amateur Radio Packet Radio", CQ Magazine, November 1985.*
5. *Radio Shack No. 62-1388, "Understanding Telephone Electronics".*
6. *Radio Shack No. 62-1389, "Understanding Data Communications".*
7. *Radio Shack No. 62-2010, "Understanding Digital Electronics".*

Bicycle-Mobile R & D Lab

Practical Points for Inhibited Experimenters

by Steven K. Roberts N4RVE

It can happen anywhere, and usually does. I wake in camp, breathe the vapors of morning inside a billowing nylon cocoon, rustle a warm hand from the depths of my sleeping bag to touch KA8ZYW, and lie there thinking intently. "Hmmmm...if I let the new TNC handle speech control in parallel with the BCP, then I can sign on via packet from the HP and carry on a synthesized conversation with people around the bike...monitoring their audio on 49 MHz. Gee..."

Maggie's hair cascades across my neck. "You were talking in your sleep again," she murmurs. "Is a speech-control bus something the government uses to arrest boring politicians?"

Those are the first clues. Over flawless campground coffee, I stretch, sketch, and mumble, scan my listings and schematics, regale the morning-sweet YL with complex tales of logic and technomagic. The maps are forgotten and there's no rush to pack...for it's a tinkering day!

Well, so now what? There's no room on a bicycle for diagnostic tools, documentation library, R & D inventory, prototyping board, and drafting equipment—or is there?

One of the things I've learned from this whole traveling circuit of mine is that no complex system is ever finished. And while reliability has been generally excellent, I find a lot of reasons to crawl under the hood and do some engineering. As such, I've had to put together a passable mobile R & D lab...and in this, the fifth column of the series, I'd like to take the reader on a quick tour.

The First Issue: Documentation

If I had to work on the Winnebiko from memory, nothing would ever get done for fear of screwing it up beyond recognition. A project in progress becomes etched so deeply in the brain that the builder is sure he always remember exactly how it works. A few grim all-nighters of staring glumly at undocumented creations, however, dispelled that fallacious notion from my head. I now carry three forms of documentation on the bike:

A clamp-style binder, stuffed with about ¾" of schematics, listings, notes, wiring specs, idea sketches, and so on. This is the irreplaceable document that completely defines the custom parts of the electronics package, and I periodically photocopy the whole mess and mail it back to my office as a backup.

An "aquarium of microfiche" containing highly reduced copies of key IC databooks, software and hardware manuals, reference guides, and so on. A 20X Keyan reader gives easy access to what would otherwise amount to 15–20 pounds of books. I have also added Buckmaster's microfiched amateur radio call directory, a number of maps, and other convenient reference material.

A subdirectory of disk files on the HP laptop, defining operating procedures, the functions of all controls, and other variable information. This includes the Bicycle Control Processor's source code listings and—equally important—a sprawling file of comments and narrative explanations associated with each of the 15 major revision levels. This has proved invaluable time and again, as I wade hesitantly into an obscure backwater of this real-time program and wonder what madness possessed me back when I wrote it.

Adding new documentation is something that should happen at the time of any change to the system, of course, so my "R & D pack" also contains a small case with basic drawing tools and templates.

Tiny Test Bench

With space at a premium, I had to forego a few basic essentials. I carry no oscilloscope, function generator, spectrum analyzer, hammer, or milling machine. But I do have a logic probe, digital multimeter, SWR bridge, prototyping board, software development system, bench supply, built-in current monitor, "Quick-Connect" wiring tool, butane soldering iron, and extensive toolkit.

It's amazing how much can be done with a few basic lightweight tools when the constraints of a nomadic lifestyle demand it. My software contains a library of test loops that exercise all I/O logic in a way that makes it amenable to debugging with a logic probe and development system. Internal jacks offer convenient supply voltages for prototyping, and a ledge inside the console even carries a permanent parts tray and soldering-iron stand. The point of all this, of course, is to make development work as painless as possible...even if it happens in a campground.

Easy prototyping depends upon a convenient packaging method, and I use the Robinson-Nugent Quick-Connect boards exclusively. They're faster than wirewrap, lower profile, and more rugged (a major issue on a bicycle). The boards are hinged in my installation, so modifications can be made without having to unplug any connectors or dangle live hardware from a cable harness.

One more thing. Despite convenient onboard equipment, there are still occasional projects that require more in the way of support facilities than I can carry. I keep a list of such "long-range TO-DO's" on disk, and scan it whenever I find myself visiting someone who owns a well-equipped lab. "Ahhhh...I see you have a spectrum analyzer. You know, I have some birdies that have been giving me trouble...got a near-field probe for that thing?"

The Junk Box

As we all know, no lab is complete—or even possible—without a well-equipped junk box of tinkering stock. It's just not possible to experiment effectively if the only access to components is a shopping list (hamfests and surplus stores notwithstanding).

I carry about six pounds of parts, as well as a bag of fundamental essentials such as Ty-raps, wire, heat-shrink, and the like. There is a sheet of antistatic foam with a hundred or so 74HC glue parts, along with a collection of particularly interesting devices I just gotta have. (You know how it is: "Well, someday I'll find a neat use for a high-speed array processor on my bike...sure, I'll take it.") There are a few dozen individual Zip-Loc bags, dedicated to such things as R's, C's, D's, Q's, connectors, switches, ferrites, packaging parts, mechanical hardware, spade lugs, and so on—with, amazingly, enough depth and variety to support a typical day of tearing into the system with new ideas in mind.

Keep On Tinkerin'

The bottom line, of course, is that no-one need be prevented from experimenting by the constraints of a nomadic, cramped, or socially hampered lifestyle. I have an old friend who lost the spark of tekwizardry when he married a rather dull preppie more obsessed with style than substance. The books in the living room were sorted by color of binding, the dog was a designer model far beyond their budget, and all that junk of his cluttering the basement JUST HAD TO GO! Before long he gave in: The subscriptions to journals lapsed, the equipment was all sold or given away, and this promising designer of early microprocessor systems became just another dull employee with no passions, no hobbies, no energy, no dreams.

But a single desk can hold enough to keep the creative spark alive—enough to keep the nose wrinkling with the acrid smell of solder...the eyes gleaming in the light of dancing phosphor...the ears perking to the distant call of an unmet friend as yet another idea survives the smoke test and reinforces the reason for being.

Creativity can thrive anywhere—let it!

NEWS BULLETIN

CALL US NOW!

YOUR HAM DOLLAR GOES FURTHER AT . . .

CALL OR WRITE FOR SPECIAL QUOTE

When it comes to FAST DELIVERY, HONEST DEALING and PROMPT/DEPENDABLE S-E-R-V-I-C-E back-up We don't just advertise — WE GIVE IT!

we'll treat you SELECTION S-E-R-V-I-C-E and SATISFACTION!

In 1937, Stan Burghardt (WØIT), because of his intense interest in amateur radio, began selling and servicing amateur radio equipment in conjunction with his radio parts business. We stand proud of this long-lasting tradition of ***Honest Dealing, Quality Products and Dependable "S-E-R-V-I-C-E"!***

Above all, we fully intend to carry on this proud tradition with even more new product lines plus the same ***"fair"*** treatment you've come to rely on. Our reconditioned equipment is of the finest quality with ***30, 60*** and even ***90-day*** parts and labor warranties on selected pieces. ***And always remember:***

— WE SERVICE WHAT WE SELL —

AEA	Belden	Icom	Nye
Alinco	Bencher	Jerold/Delhi	Palomar
Ameritron	Bird	Kantronics	Radio Callbook
Amphenol	Butternut	KDK/Encomm	Rohn
Amp Supply	Centurion	KLM	Telex/Hygain
Antenna Specialists	CES	Larsen	Ten-Tec
	Cushcraft	MFJ	Trio-Kenwood
Astron	Daiwa	Mirage	Unadilla/Reyco
B & W	Hustler	Moseley	Yaesu

Write today for our latest Bulletin/Used Equipment List.

STORE HOURS: 9-5 P.M. (CST) MONDAY thru FRIDAY OPEN SATURDAYS from 9-1 P.M. (CST) CLOSED SUNDAYS/HOLIDAYS

MAIL AND TELEPHONE ORDERS WELCOMED They're our business!!

MasterCard VISA

182 N. Maple
P.O. Box 73
Watertown, SD 57201

Burghardt INC.
AMATEUR CENTER
"AMERICA'S MOST RELIABLE AMATEUR RADIO DEALER"

SELL-TRADE
New & Reconditioned
HAM EQUIPMENT

Call or Write Us Today For a Quote!
You'll Find Us to be Courteous, Knowledgeable and Honest

PHONE (605) 886-7314
FAX (605) 886-3444

TEN-TEC PARAGON
160-10, HF TRANSCEIVER

NOW IN STOCK!
CALL FOR QUOTE!

CIRCLE 92 ON READER SERVICE CARD

here is the next generation Repeater

MARK 4CR

The **only** repeaters and controllers with REAL SPEECH!

No other repeaters or controllers match Mark 4 in capability and features. That's why Mark 4 is the performance leader at amateur and commercial repeater sites around the world. Only Mark 4 gives you Message Master™ real speech • voice readout of received signal strength, deviation, and frequency error • 4-channel receiver voting • clock time announcements and function control • 7-helical filter receiver • extensive phone patch functions. Unlike others, Mark 4 even includes power supply and a handsome cabinet.

Call or write for specifications on the repeater, controller, and receiver winners.

Create messages just by talking. Speak any phrases or words in any languages or dialect and *your own voice* is stored instantly in solid-state memory. Perfect for emergency warnings, club news bulletins, and DX alerts. Create unique ID and tail messages, and the ultimate in a real speech user mailbox — only with a Mark 4.

2 meters 220 440

TELEX: # 4932256 KENDECOM
FAX: # 6173737304

MICRO CONTROL SPECIALTIES
Division of Kendecom Inc.
23 Elm Park, Groveland, MA 01834 (617) 372-3442

CIRCLE 295 ON READER SERVICE CARD

Continued from page 6

Island, Oahu, California, Missouri...and back to New Jersey. It was a fantasic six week trip, meeting hams at every stop and talking with thousands more while we were flying. Unfortunately, I was so irritated by OLJ's arrogance that I refused to write the story of the trip.

Where was I?

Now, Chandra...Well, on the strength of the article in the March *Discover*, I bought her book, *Evolution From Space*, a theory of cosmic creationism, written with Sir Fred Hoyle. Chandra, it turns out, is a well-known astronomer.

The book was utterly fascinating. I couldn't put it down. Chandra does a very scientific job of lining up all of the facts available from astronomy, geology, biology, and other sciences, and presents them as a completely new concept of how life started and developed on Earth. No, the ideas are not supportive of biblical creationism, nor of Darwin, for that matter. She makes a powerful case, carefully documented every inch of the way. Most impressive.

Particularly fascinating to religious zealots may be the problem of their cherished beliefs being challenged by science. Of course, that's supposing such a transformation is possible, which I don't accept. Religious, like political beliefs, often are remarkably durable, able to withstand incredible onslaughts of reason and facts with nothing more lasting than deep resentment resulting.

Unconventional Wisdom

While on the one hand Chandra demolishes all the accepted explanations of how life began on Earth, she comes up with both a mathematical and a scientific proof of the existence of God. Scientists who haven't had a religious brainwashing may find this irresistable.

For instance, Chandra shows clear evidence that life occurred on Earth at the earliest instant it could have survived here. She shows mathematically the utter impossibility of life getting started by chance. If you feel like arguing with her theory, read the book ($5.95 in paperback), don't get steamed up just from this micro-report.

She shows that microbes are small enough to be pushed through space millions of light years by the pressure of light. She shows that they can live for billions of years in suspended animation, awaiting a suitable planet to colonize. She shows that there seem to be vast quantities of such cells moving through space.

I suspect Chandra's book may appeal to people in an inverse proportion to the degree of religious brainwashing they've received, mostly from parents when they're very young. "Give me a child until he's seven and I'll give you the man." Was it Freud who said that? If you watched the PBS program "7-14-21-28," you probably understand the startling truth of this concept.

Brain Power

Now, this brainwashing thing takes me back even before my exciting adventures on Operation World-Wide. We've all seen the Hari Krishnas at airports and read about Moonies, so we know on some level that brainwashing works terrifyingly well. We may think that there's a requirement for some sort of brain damage or stupidity to make someone susceptible to these religions.

No, it can happen to the most intelligent people. It's got little to do with intelligence or education. It has more to do with hypnotism, which is a mysterious working of the mind only a few people understand. For that matter, it's not really possible to say that anyone really understands how the mind works. Heck, we still don't even have a clue as to where or how memories are stored.

Anyway, quite a few years back there was a chap who came out with an outrageous explanation of how the mind worked. This, in turn, suggested a way to repair some of the more serious mental problems. Naturally the medical establishment quickly branded him as a quack, the same treatment they give almost anyone with a new idea, right or wrong. But I'm willing to give new ideas a chance, so I read carefully on the subject. Then, fascinated by what I'd read, plus some very convincing experimental proof, I left my job as a radio engineer/announcer and went to work with the chap for a while in his new research foundation.

One of the beauties of brainwashing with hypnotism is that the people hypnotized not only are unaware that anything strange has happened, they will fight to the death for their new beliefs. This is why it is so difficult to kidnap and reprogram people who have been captured by the fanatical religious sects. This is one of the reasons why we have terrorists. You just can't reason with such deeply ingrained mind programming.

So What?

In general I've found that the louder and the more impassioned the noise from politicians and religious leaders, the less I'll find of truth and the more I'll be expected to accept beliefs on blind faith.

How can we tell when we are reacting because of brainwashing or hypnosis? Heck, that's easy, if you think about it. The flashing red light should come on when you find yourself getting mad. This is a class A warning that reason is fighting some sort of belief. The easy way out is to get mad. This blanks the mind from receiving any further reasoned input. When you get mad you are no longer able to think rationally. Just listen to angry people screaming out slogans. Many things they say don't even fit the occasion, but their conscious mind is so heavily blanked by angry emotions that they aren't even aware of all this.

The Impossible is Possible

It's frustrating to realize that all of us are, to some degree, operating on the basis of early brainwashing. We're embarrassed at the thorough job our ancestors did on the American Indians. Could never happen again, right? Then we think about the job the Germans did on people not all that long ago. They killed about six million Jews and another six million non-Jews. Stalin wiped out over double that. The Chinese wiped out tens of millions fairly recently. 600,000 Ugandans have been murdered in the last few years. Several million Afghanis. Who knows how many Iranians and Iraquis?

The people who are doing all this killing are people. People like us. The only difference is in the degree and type of brainwashing. Old timers like me will remember the force of patriotism that fueled WWII. There was little thought of not fighting. Men were caught up in it, pushed hard by their wives and mothers. The media and Hollywood cooperated with the government in massive media hype. It worked.

It's fascinating to demonstrate the power of even the simplest of post-hypnotic suggestion. For instance, if you tell a person under hypnosis that when you touch your cuff he'll take off his coat and when you touch your ear he'll put it back on, you can have him taking off and putting on his coat dozens of times, always with a logical (to him) explanation, one he truly believes. It isn't until you have him taking it off and putting it on several times a minute that he finally realizes something is wrong that he can't explain. It's absolutely amazing how well even a simple exercise like this is protected by the mind from recognition.

Yes, with the appropriate therapy it's possible to go back and decondition all this mess, setting people free to actually think. This must take a long time, right? No, it's incredibly faster than any of our accepted mental therapies. We're talking about months of cure in hours.

Lamentation

I bump into Bud at Dayton occasionally. I haven't seen W8OLJ since the trip, thankfully. It would have been an infinitely better trip except for him. Bill W2SKE was a great traveling companion. He went on to become the head of CBS News and retired a few years ago.

I'll have to write about the trip. I don't remember that anything like it has ever happened again in amateur radio. It was a ham's idea of nirvana, visiting 24 countries, all the while keeping in touch with the entire world with the ham station on the C-54.

Old timers will remember when Arthur Godfrey went on a trip to Africa and took along amateur radio. I remember trying my darndest to get through when he was on the air from French West Africa (FF8)—not to talk with Arthur, but with a close friend of mine, Carol Cone, who was along with him on the safari. Never made it.

Somewhere in the barn I have a couple of the old Operation World-Wide Ampex tapes. I wonder what ever happened to the dozens of tapes with the thousands of QSOs from that trip?

Ah, a lament for the old DX-pedition days: the Hallicrafters DXpedition into darkest Africa; Godfrey; Don Miller, for all his shenanigans, gave us contacts from almost everywhere. Gus Browning W4BPD's trips; Danny Weil and the YASME; Dick McKircher W0MLY's African barrage.

Say, where are Lloyd and Iris now? 73

NEW PRODUCTS

Compiled by Linda Reneau

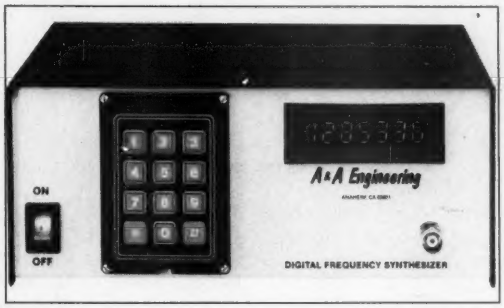

PRODUCT OF THE MONTH

A & A ENGINEERING

A & A Engineering's new Digital Frequency Synthesizer has 1 Hz resolution, an output of ½V peak-to-peak into 75Ω with almost no phase noise to frequencies in excess of 6.5 MHz. Digital synthesis techniques elimate VCO, PLL, and loop setting time. It comes complete with RF unit, microprocessor controller, seven segment display, keyboard, and 110 VAC power supply. The controller offers a standard 12-key program and accepts as many as 32 keys. Unused EPROM and RAM space allows the user to program custom features. The price is $429.95 per unit, FOB Anaheim. Quantity discounts. Call or write *A & A Engineering, 2521 W. La Palma, Unit K, Anaheim CA 92801; 714-952-2114.* Or circle Reader Service number 211.

MELCO PUBLISHING

The *Heil Ham Radio Handbook*, written by Bob Heil K9EID explores the practical aspects of installing antennas, soldering connectors, grounding your station, identifying transitor leads, and much more. This book has lots of handy hints and money-saving ideas in easy to understand language. To order, send $9.95 plus $1 postage to *Melco Publishing, PO Box 26, Marissa IL 62257.* Or circle Reader Service number 202.

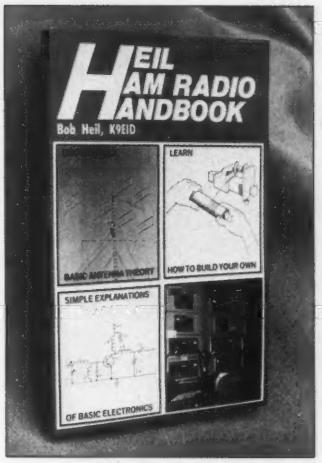

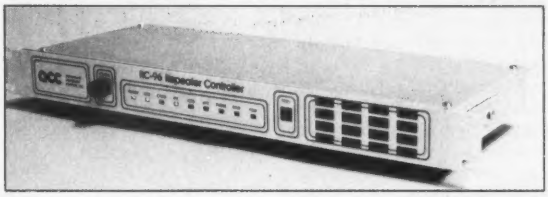

ADVANCED COMPUTER CONTROLS, INC.

The new RC-96 Repeater Controller has remote programming, autopatch with autodialer, and memory for 200 phone numbers. It also features a talking S-meter, built-in keypad and shielded DIN cables. The RC-96 Repeater Controller supports pocket pagers, linking to other repeaters, and a bulletin board. A gas discharge tube across the phone line and transient suppressors on each signal line minimize the risk of lightning damage. The suggested retail price is $1,350. For more information, contact *Advanced Computer Controls, Inc., 2356 Walsh Avenue, Santa Clara CA 95051, or call 408-727-3330.*

APPLIED DIGITAL RESEARCH, INC.

ADR announces SAT TRAK II, an automatic satellite tracking controller. SAT TRAK II calculates satellite position and antenna angle in real time. It will drive most azimuth and elevation rotors including the Kenpro KR400/KR500, KR5400A, KR5600A (an interface is provided for the "A" series), and CDE rotors. The $435 price includes all necessary connectors and a 110 VAC power supply. *Applied Digital Research, Inc., PO Box 10184, Sarasota FL 34232; 813-378-3410.* Or circle Reader Service number 201.

AMECO PUBLISHING CORP.

AMECO's new tunable preamplifier Model PT-3 continuously covers 1.8 through 54 MHz. Options are available for second receiver and separate receiving antennas. Retail, the PT-3 Preamplifier is $109.95. The P-12T power supply adapter is $8.95. For further information, contact *AMECO, 220 E. Jericho Turnpike, Mineola NY 11501; 516-741-5030.* Or circle Reader Service number 214.

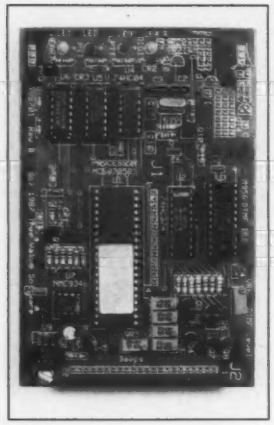

TRUE VALUE SOFTWARE

True Value Software TVS701B repeater controller can be remotely configured without ROMS or jumpers. The unit offers voltage telemetry and alarms to monitor batteries and power levels. A watchdog timer and EEPROM protect the unit from power failure. TVS701B has 74 functions, four levels of control security, digital inputs and outputs for auxiliary control and alarms. Easy-to-build kit price: $190. Assembled and tested, $300. *True Value Software, 2805 E. Sherran Lane, Phoenix AZ 85016; 602-956-4259.* Or circle Reader Service number 204.

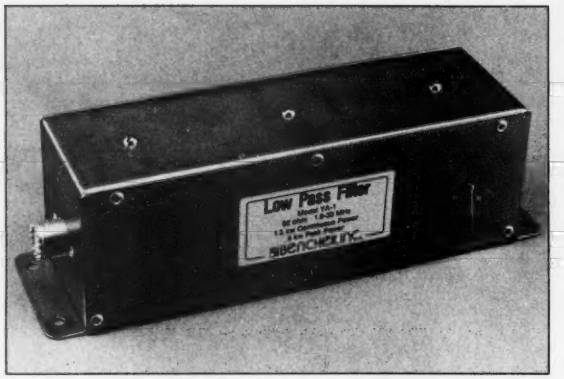

BENCHER, INC.

Bencher introduces the YA-1 Low Pass Filter, which demonstrates a minimum attenuation of 80 dB for harmonic radiation at 54 MHz. It has a working range of 1.8 to 29.7 MHz, an impedance of 50Ω, power rating of 1.5kW continuous, and 5kW peak. The YA-1 sells for $39.95 plus $3 postage. *Bencher, Inc., 333 West Lake Street, Chicago IL 60606. MCI Mail 277-5159, TELEX 650-277-5159, Phone 312-263-1808.* Or circle Reader Service number 215.

INTELECT

The I-C-LATOR 16, available from Intelect, allows design and test of any DIP device. The user can open loops, inject signals, and modify circuits outside an original assembly. The experimenter can measure current and independently open each signal path. The user replaces the original IC with the I-C-LATOR 16's cable, eliminating the need for card extenders. The unit will accommodate 6- to 16-pin analog or digital ICs. It can be used with emulator probes, function generators, logic analyzers, and scopes.



Price: $49.75. Free brochure. INTELECT, 2908 Nebraska Ave., Suite A, Santa Monica CA 90404. *Or circle Reader Service number 203.*

PERIPHEX, INC.

Periphex announces new replacement battery packs for the Yaesu FT-23/R/33R/73R. The FNB-10, 7.2V 600mA for 2.5W output and the FNB-12, 12V 500mA for 5W output are both available from stock. Charge with standard Yaesu wall or desk chargers. Both battery packs offer a one year guarantee. FNB-10 is just $33, and the FNB-12 is $49 + $3 shipping. For further information on these or other battery packs, contact *Periphex, Inc., 149 Palmer Road, Southbury CT 06488; 1-800-634-8132, in CT 203-264-3985.* Or circle Reader Service number 205.



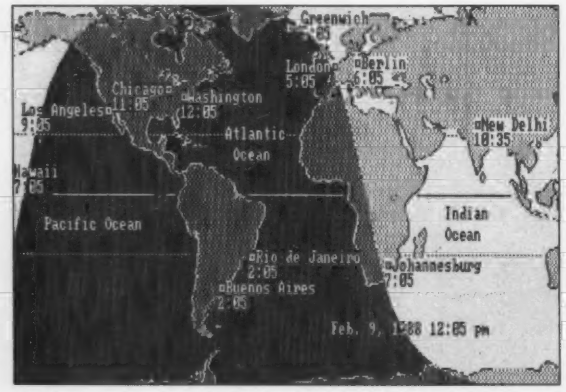

TRIDOS

Terminator, from TriDos Software Publishers, is a real time graphic emulation of the Geochron™ clocks. The graphic map of the earth shows the terminator line between night and day. The time algorithms consider solar declination, apparent size of the solar disk, atmospheric refraction, and the difference between solar and earth times due to the earth's slightly elliptical orbit. To display areas on the map add the user's name, longitude, latitude, and time zone to the parameter file. Terminator is available from dealers for $39.95 or from *Spite Software, 4004 SW Barbur Blvd., Portland OR 97201. Order toll free at 800-237-9111.* Or circle Reader Service number 210.

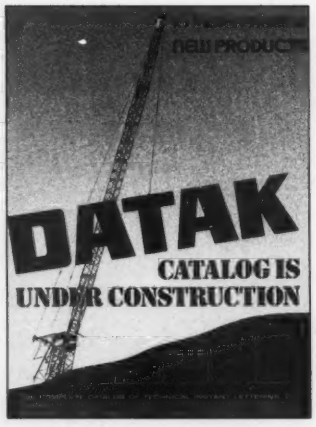

DATAK

DATAK's latest 30-page catalog is for the ham who builds or customizes his own gear. The catalog offers electronic title sets; multi-color transfer designs to make special meter dials and tap switch patterns; alphabet and number sheets; resist patterns for making printed circuits via the "Direct Etch" method; and a patented "Photo Etch" set that will copy circuit patterns from a magazine without harming the page. DATAK also has over 600 JotDraft™ printed circuit patterns, PC tapes, etching and plating chemicals, and protective coatings. For your free catalog write to *The DATAK Corporation, 3117 Paterson Plank Road, No. Bergen NJ 07047.* Or circle Reader Service number 213.

AMATEUR RADIO SCHOOL

Amateur Radio School announces their newest course, the Video Novice. Using your TV and VCR, this course demonstrates subjects not easily understood from books alone. Video Novice covers practical demonstrations and explanations for everyone new to amateur radio. The course consists of two, two hour VHS cassettes, one C90 audio cassette, and a study guide with 302 questions, answers, and a frequency chart. Cassette #1 has two hours of theory, and #2 has one hour of theory and one hour of visual code instruction. The Video Novice Course is $39.95 plus $5 postage. To order or for more information, write or call *Jerry Ziliak KB6MT, Amateur Radio School, 2350 Rosalia Drive, Fullerton CA 92635. 714-990-8442.* Or circle Reader Service number 206.

WM.M. NYE COMPANY

The NYE RF Power Monitor gives peak, average or peak-and-hold readings using a sample-and-hold analog memory circuit. The monitor can display the correct peak power reading of a single 1 msec pulse for up to 20 seconds. Other features include adjustable ALO, automatic SWR, interchangeable couplers, SWR/REV warning display, NiCd batteries with a separate charger, and full-wave detection system. Rated up to five kilowatts, the RFM-003 and the RFM-005 differ only in wattmeter scaling. Priced at $297. Contact *Wm. M. Nye Co., 1614 130th Ave. NE, Bellevue WA 98005; 206-454-4524.* Or circle Reader Service number 208.

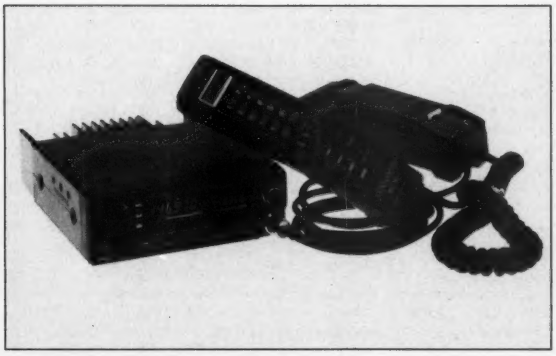

KENWOOD

Kenwood announces the new TM-721A FM dual-band, 2m/70cm mobile transceiver. Features include a dual-channel watch function, selectable full duplex operation, extended frequency coverage with 30 memory channels, large multi-color digital LCD displays, and programmable scanning with 45 watts output on VHF and 35 watts on UHF. Retail, $649.95. For more details, contact *Kenwood USA Corporation, Communications & Test Equipment Group, 2201 E. Dominguez St., Long Beach CA 90810; 213-639-4200. Fax 213-604-4487.*

GREAT CIRCLE MAP COMPANY

The Great Circle Map Company now has azimuth-equidistant wall maps that give the radio amateur instant information on range and beam headings to any location on earth. Each map is unique, specially drawn using computer techniques, and centered on the individual's QTH. The major surface features are detailed by hand. The station's callsign are hand-lettered on the lower right. Suggested retail, $59. For more information on these brightly colored, 35" x 23" maps, write *The Great Circle Map Company, 8409 Bear Tree Circle, San Antonio·TX 78255.* Or circle Reader Service number 209.

SHURE

The Shure 444D Omnidirectional Controlled Magnetic Microphone offers switch selectable impedance, a normal/VOX selector, and Shure's patented leaf switch with locking and momentary action. Frequency response is tailored for optimum speech intelligibility and purchasers can receive a free individually printed plate with their call letters. The suggested retail price is $78. For more information contact *Shure, ATTN: Carolyn Gunnell, 222 Hartrey Ave., Evanston IL 60202; 312-866-2200.* Or circle Reader Service number 212.

McGRAW-HILL BOOK COMPANY

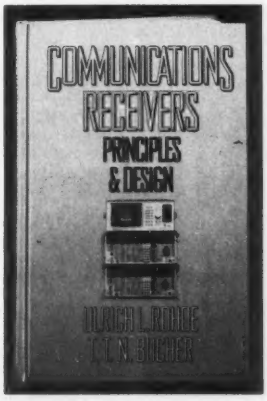

Communications Receivers: Principles and Design, by Ulrich L. Rohde and T.T.N. Bucher, is a guide to the theory and design of all types of communications receivers—shortwave, military, broadcast, aeronautical, marine, and direction-finding. Accessories and peripheral equipment are covered, along with a wide range of design topics and engineering concepts. There are 583 pages with 402 illustrations. Cost is $59.50. *McGraw-Hill Book Company, 11 West 19th Street, New York NY 10011; 212-337-5945 or 337-5951.* Or circle Reader Service number 216.

DEALER DIRECTORY

CALIFORNIA

Burbank

New HAM store open and ready to make a DEAL. We carry all lines, ship UPS, and are open Sunday. **A-TECH ELECTRONICS, 1033 Hollywood Way, Burbank CA 91505; (818)845-9203.**

San Diego

Hard to find parts, surplus electronics, standard line items. Hams, hobbyists, industrial professionals—from nuts & bolts to laser diodes...Electronically speaking, Gateway's got it! M-F 9-5:30 Sat. 9-5. **GATEWAY ELECTRONICS, 4633 Convoy St., San Diego CA 92111; (619)279-6802.**

COLORADO

Denver

Hard to find parts, surplus electronics, standard line items. Hams, hobbyists, industrial professionals—from nuts & bolts to laser diodes...Electronically speaking, Gateway's got it! M-F 9-5:30 Sat. 9-5. **GATEWAY ELECTRONICS, 5115 N. Federal Blvd. #32, Denver CO 80221; (303)458-5444.**

DELAWARE

New Castle

Factory authorized dealer! Yaesu, ICOM, Ten-Tec, KDK, Kenwood, AEA, Kantronics, Santec. Full line of accessories. No sales tax in Delaware. One mile off I-95. **DELAWARE AMATEUR SUPPLY, 71 Meadow Road, New Castle DE 19720; (302)328-7728.**

Wilmington

Delaware's friendliest ham store. Also Shortwave supplies. **AMATEUR & ADVANCED COMMUNICATIONS, 3208 Concord Pike, Wilmington DE 19803; (302)478-2757.**

HAWAII

Honolulu

Kenwood, ICOM, Yaesu, Hy-Gain, Cushcraft, AEA, KLM, Tri-EX Towers, Fluke, Belden, Astron, Etc. **HONOLULU ELECTRONICS, 819 Keeaumolu Street, Honolulu HI 96814; (808)949-5564.**

IDAHO

Preston

Ross WB7BYZ has the largest stock of amateur gear in the Intermountain West and the best prices. Call me for all your ham needs. **ROSS DISTRIBUTING, 78 S. State, Preston ID 83263; (208)852-0830.**

MASSACHUSETTS

Littleton

Reliable hamstore servicing New England. Full line of Kenwood and ICOM stocked and serviced. AEA, ARRL Publications, Anphenol, Alpha Delta, Austin, Avanti, Alinco, Ameco, Bencher, B&W, Cushcraft, Carol Cable, Daiwa, Hustler, KLM, Kenpro, Larsen, Rohn, RF Concepts, Tokyo Hy-power, Trac Keyers, Vibroplex, Welz, etc. **TEL-COM, INC., 675 Great Road (Rt. 119) Littleton MA 01460; (617)486-3400, (3040).**

MISSOURI

St. Louis

Hard to find parts, surplus electronics, standard line items. Hams, hobbyists, industrial professionals—from nuts & bolts to laser diodes...Electronically speaking, Gateway's got it! M-F 9-5:30 Sat. 9-5. **GATEWAY ELECTRONICS, 8123 Page Blvd., St. Louis MO 63130; (314)427-6116.**

NEW HAMPSHIRE

Derry

Serving the ham community with new and used equipment. We stock and service most major lines: AEA, Astron, B&W, Cushcraft, Encomm, Hy-Gain, Hustler, ICOM, Kenwood, KLM, Larsen, Mirage, Mosley; books, rotors, cable and connectors. Business hours Mon.-Sat. 10-5, Thursday 10-7. Closed Sun./Holidays. **RIVENDELL ELECTRONICS, 8 Londonderry Road, Derry NH 03038; (603)434-5371.**

NEW JERSEY

Lyndhurst

Finally a ham store in NJ. Located ¼ mile south of Rt. 3. Mon.-Wed. 11:30-7:30, Thursday 11:30-9, Friday 11:30-7:30, and Saturday 9-3. Visa/MC. **ABARIS SYSTEMS, 276 Oriental Place, Lyndhurst NJ 07071; (201)939-0015.**

NEW YORK

Jamestown

Western New York's finest amateur radio dealer featuring ICOM-Larsen-AEA-Hamtronics-Astron. New and used gear. **VHF COMMUNICATIONS, 915 North Main St., Jamestown NY 14701, (716)664-6345.**

New York

New York City's Largest Full Service Ham and commercial Radio Store. **BARRY ELECTRONICS, 512 Broadway, New York NY 10012; (212)925-7000.**

NORTH CAROLINA

Greensboro

9a.m. to 7p.m. Closed Monday. ICOM our specialty-Sales & Service. **F&M ELECTRONICS, 3520 Rockingham Road, Greensboro NC 27407; (919)299-3437.**

OHIO

Columbus

Central Ohio's full-line authorized dealer for Kenwood, ICOM, Yaesu, Ten-Tec, Info-Tech, Japan Radio, AEA, Cushcraft, Hustler, and Butternut. New and used equipment on display and operational in our 4000 sq.ft. store. Large SWL department, too. **UNIVERSAL AMATEUR RADIO, 1280 Aida Drive, Reynoldsburg (Columbus) OH 43068; (614)866-4267.**

PENNSYLVANIA

Trevose

Same Location for over 38 years. **HAMTRONICS, DIV. OF TREVOSE ELECTRONICS, 4033 Brownsville Road, Trevose PA 19047; (215)357-1400.**

TENNESSEE

Memphis

M-F 9-5; Sat 9-12; Kenwood, ICOM, Ten-Tec, Cushcraft, Hy-Gain, Hustler, Larsen, AEA, Mirage, Ameritron, etc. **MEMPHIS AMATEUR ELECTRONICS, 1465 Wells Station Road, Memphis TN 38108; Call Toll Free: (800)238-6168.**

TEXAS

Dallas

In Dallas since 1960. We feature Kenwood, ICOM, Yaesu, AEA, Butternut, Rohn, amateur publications, and a full line of accessories. Factory authorized Kenwood Service Center. **ELECTRONIC CENTER, INC., 2809 Ross Ave., Dallas TX 75201; (214)969-1936.**

Houston

Hard to find parts, surplus electronics, standard line items. Hams, hobbyists, industrial professionals—from nuts & bolts to laser diodes...Electronically speaking, Gateway's got it! M-F 9-5:30 Sat. 9-5.**GATEWAY ELECTRONICS, 10645 Richmond Ave. #100, Houston TX 77042; (713)978-6575.**

Southwest Houston

Full line of Equipment and Accessories, in-house service, Texas #1 Ten Tec Dealer! **MISSION COMMUNICATIONS, 11903 Alief-Clodine, Suite 500, Houston TX 77082; (713)879-7764.**

DEALERS

Your company name and message can contain up to 25 words for as little as $199 yearly (prepaid), or $50 for three months (prepaid). No mention of mail-order business permitted. Directory text and payment must reach us 60 days in advance of publication. For example, advertising for the April '88 issue must be in our hands by February 1st. Mail to *73 Amateur Radio,* Hope Currier, WGE Center, Peterborough, NH 03458.

Number 17 on your Feedback card

HAM HELP

Your Bulletin Board

We are happy to provide Ham Help listings free, on a space available basis. To make our job easier and to ensure your listing is correct, please type or print your request clearly on a full (8½ x 11) sheet of paper. Double space and use upper and lower case letters where appropriate. Also, write numbers carefully—a 1, for example, can be read as an I or an i or a 7. Thanks.

I am collecting amateur radio license plates from each of the US states and possessions, and the ten provinces and two territories of Canada, for a public display. I am also looking for any information on Amateur radio license plate history, such as which region first started issuing them, when, and if they are issued in countries besides the US and Canada. Finally, I'm interested contacting any other license plate collectors for possibly forming a voice net.

I will gladly pay all photocopying, shipping and handling costs. Thanks!

Bryan Hastings KA1HY/AE
64 Concord St.
Peterborough NH 03458

Looking for front panel, part #205-178-1 for Heath VF-7401 two meter rig. Heath no longer sells that part. Will pay for part and shipping.

Bob Clark N5GSE
5430 Markwood Lane
Houston TX 77053

I need schematic and alignment info for Lafayette Model HA-700 Receiver. I will copy and return. Thanks.

T.W.Brown KA7NIE
5104 E. Farmdale
Mesa AZ 85206

Need conversion info re/Hy-Gain V, Model #2705, 40 channel, SSB, CB transceiver. The board is #PTBM048AOX. It is desired to start Ch. 1 at 28.300 MHz and work up from there. Any information on this conversion would be greatly appreciated. See you on 10.

Edward R. Levy WB3EVY
PO Box 161
Blakeslee PA 18610

Help wanted for information. Cost of copy or dispatch will be gladly refunded. 1) Any information or ECN's for improvement/modifications on the Spectrum Generator and PLL Synthesizer part of National HRO-500 Receiver. 2) Circuit and alignment info of SINGER Electronics Universal Spectrum Analyzer Model MF-5 and Plug-in unit Ultrasonic Module UR-3. 3) Diagram of MFJ 931 Tuner. 4) Technical info and application circuit of TOKO's Mechanical Filter MF 455A 120F with coils 9579A and 9580A. 5) Possibility of adding the 7th digit-display TS-830S.

Fred Olte C30LEN
25C, La Pleta Ordino,
Principat d'Andorra (EUROPE)

Wanted manuals/schematics for G.E.L. Receiver 13B1, A.C.L. Receiver TR140A, G.R. 1617 Cap. Bridge, Waters 1003B Diode-checker, Singer-Gertsch FM9CG SIG. Gen., Motorala S1323 Meter.

W. Kinne
1163 Ingerson Road W.
St. Paul MN 55112

HELP! I'm looking for a schematic or conversion manual if available for a Navy receiver in the RAX-1 Series. It has 4 band coverage from 1.5 MHz to 9 MHz. It's type CG-46116. I'll pay a reasonable price.

Gary Nelson
P.O. Box 3676
Portland ME 04104

Looking for a vanishing breed. I would like to contact for friendly correspondence and mutual assistance any and all who are into collecting, restoring and using the classic receivers—Collins S-Line, 51-J, R-390, SP 600, HROs, etc. Also high grade, useful military surplus.

J.L.Browning
6442 Cathay Cir.
Buena Park CA 90620

I'm looking for schematic of AN/VRC-19 150–160 MHz, mobile, 24-volt FM TX and RX equipment, or data on same.

Richard Thompson
234 Spring St.
Hanover MA 02339

I need an instruction manual and/or schematic for the Hickock 6000 series tube tester. Will pay any copying and mailing costs.

T.H.Killoran W7PP
8316 54th Dr. NE
Marysville WA 98270

Propagation forecaster wanted! *73* needs a new propagation writer, since Jim Gray W1XU plans to take his retirement seriously later this year. Naturally, you should be familiar with modern propagation prediction techniques, though writing experience is not required. Send queries to:

Larry Ledlow NA5E
73 Magazine
Peterborough NH 03458

QRV Solar Power for your Station

The $289.95 Bullet-tested QRV Solar Power Supply keeps your repeater on the air 'round the clock or powers your 100-watt HF station 60 hrs a month. Control circuit speeds charge, protects gel cells & sealed batteries. Fully assembled, QRV, expandible, portable.

Add $10 S & H. Info 56c s.a.s.e. AntennasWest
1971 N. Oak Ln., Provo, UT 84604 (801) 374-1084

CIRCLE 89 ON READER SERVICE CARD

CABLE TV

Interference filters. Send for further info or $20 for sample. Specify output channel of cable converter.

dB Electronics, P.O. Box 8644
Pembroke Pines, FL 33084

FOR THE BEST IN LINEAR AMPLIFIERS, ANTENNA TUNERS, TRANSCEIVERS, METERS ETC. REPLACEMENT PARTS, FACTORY SERVICE, NEW PRODUCT INFO. DOMESTIC, INTERNATIONAL DEALER INQUIRIES INVITED.

PO Box H
E. Rockaway, LI
NY 11518, USA
TLX 4758244
516/536-2620

the New DenTron Radio co. Inc.

CIRCLE 263 ON READER SERVICE CARD

DEN-TRONICS
Amateur Radio & Computers
6102 Deland Road • Flushing, MI 48433
(313) 659-1778 & RAGCHEW
(MI Residence)
(800) 722-5488 (800) PAC-KITT
(Order Line)

"Looking for the best deal"

Specializing in
Kantronics and AEA Products
Terminal programs for popular computers

CIRCLE 103 ON READER SERVICE CARD

AXM INCORPORATED
SUPPLIERS OF QUALITY EQUIPMENT SINCE 1976
PRESENTS THE INCOMPARABLE
TAD M-8 FM VHF TRANSCEIVER
COMPUTER CONTROLLED SYNTHESIZER

• True 40 Watt Power
• 99 Channels
• Wide-Band
• Ideal for MARS, CAP, Volunteer Fire, Ambulance, Etc.
• FCC & DOC type-accepted
• Shipped complete w/mike, mobile Slide Mount & Power Cable
• Multi Mode Scan
• Programmable CTCSS, T.O.T.
• Multi-function LCD Display
• Freq. Range 136-174 or 430-480 mHz
•Cloneable

AXM Inc., 11791 Loara
Garden Grove, CA 92640-2321
Write or Call 714-638-6807 For More Information



IF YOU BUY, SELL OR COLLECT OLD RADIOS, YOU NEED...
ANTIQUE RADIO CLASSIFIED
Antique Radio's Largest-Circulation Monthly Magazine
Articles - Classifieds - Ads for Parts & Services
Also: Early TV, Ham Equip., Books, Telegraph, 40's & 50's Radios & more...
Free 20-word ad each month. Don't miss out!
Free Sample. 6-Month Trial - $11.
1-Year: $19 ($28 by 1st Class). Foreign - Write.
A.R.C., P.O. Box 2-E4, Carlisle, MA 01741

CIRCLE 271 ON READER SERVICE CARD

the HAM STATION

P.O. Box 4405
220 N. Fulton Ave.
Evansville, IN 47710

Store Hours
MON-FRI: 9AM - 6PM
SAT: 9AM - 3PM
CENTRAL TIME

SEND A SELF ADDRESSED STAMPED ENVELOPE (SASE) FOR NEW AND USED EQUIPMENT SHEETS

WARRANTY SERVICE CENTER FOR: ICOM, YAESU, TEN-TEC

FOR SERVICE INFORMATION CALL (812) 422-0252
MONDAY - FRIDAY
9:00 AM - 12:00 NOON

TERMS:
Prices Do Not Include Shipping. Price and Availability Subject to Change Without Notice
Most Orders Shipped The Same Day
COD's Welcome

YAESU

FT-747GX
- 100 Watts of Economical Performance
- Dual VFO's, 20 Memories
- Receives from 100 kHz-30 MHz
- Built-in CW Filter + More

ICOM

IC-761
- Top-Of-The-Line High Performance HF Transceiver
- Built-In Power Supply
- Built-In Automatic Antenna Tuner
- SSB, CW, FM, AM, RTTY
- 160-10m General Coverage Receiver

TEN-TEC

PARAGON
- Full Featured Synthesized HF Transceiver
- General Coverage Receiver
- 100w Output
- SSB, CW, FSK, Optional FM
- 62 Programmable Memories
- Made In USA

YAESU ALINCO

FT-727R
- Two Affordable Radios in One
- 2m/440 MHz Handheld
- 5W on Both Bands
- Ten Memories
- Multi-Scan Systems
- Battery Saver



ALD-24T
- Dual Band Mobile 140-149.995 MHz/ 440-450 MHz
- 21 Programmable Memories
- 25 Watts Output on Both Bands
- Loaded with Extra Features

concepts



VHF/UHF AMPS
- High VSWR and Overdrive Protection
- 5 Year Warranty, 6 Months on RF Transistors
- All Units have GaAsFET Receive Pre-amps

AEA PK-232

Data Controller with 6 Modes
Packet — ASCII
Morse Code — AMTOR
Baudot (RTTY) — Weather Fax
List $319.95 Now Special Priced

SPECIAL

MFJ 989B
3 KW Tuner
$295.
- SWR/Wattmeter
- Antenna Switch
- Built-In Dummy Load

Kantronics

NEW!
5 Monoband Transceivers
- Models for 80, 40, 20, 15, 10 M
- Single-Sideband & CW
- 20 Watts PEP
- Weigh less than 2 lbs.

Call Today for Introductory Price

For Orders and Price Checks Call 800-523-7731

Indiana and Information Call 1-812-422-0231

QSL Cards

Style W

Style X



Style Y



Reverse

QSLs

Now you can get the highest quality QSL cards without spending a fortune! We put these cards on our press as filler between jobs; it gives the pressmen something to do and lets us print QSLs for you at an absurdly low price.

Not that we skimp: All three styles are produced in two colors (blue globe or satellite with black type). At these prices, you can start the new year out right by QSLing all those disappointed hams who've been waiting for your card. Tell 'em the card was printed by Wayne!

QSL Cards

Style: ☐ W ☐ X ☐ Y
Quantity:
☐ 100 @ $8.97
☐ 250 @ $19.97
☐ 500 @ $39.97
Postage and Handling $1.00
For FIRST CLASS MAIL add an additional $1.50 for prompter delivery.

Please print!
Name _____ Call _____
Address _____
City _____ State _____ Zip _____
☐ AE ☐ MC ☐ VISA ☐ Check/MO
Card # _____ Exp. Date _____

Mail your order to 73 Magazine, WGE Center, Peterborough NH 03458, Attn: Uncle Wayne.

Permission granted to photocopy

Digital Voice Compression

Potential for smaller bandwidth

by Charles Opitz WA3YQY

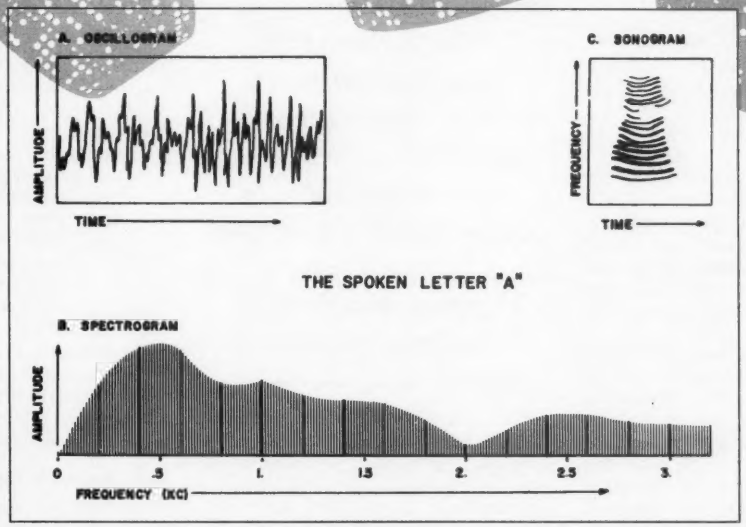

Figure 1. Three different ways to look at a fundamental sound of speech, or phoneme. Note that most of the information is contained below 2 kHz. Future voice compression techniques will probably take advantage of the redundancy of sounds in speech.

Since a good friend of mine recently lost the use of her vocal cords, I have recently given a lot of thought to state-of-the-art speech synthesizers.

One of the primary interests in amateur radio is to obtain the narrowest passband. Voice naturalness is often a secondary concern. Digitizing voice is a sort of "audio teletype," where the transmitter operator's voice is automatically encoded into a lowest possible bit rate for transmission, and where the receiver decodes this message and generates, in more or less real time, an audio version of the input spoken word. The synthesized voice must contain the meaning of the original voice message, and do so with an acceptable low error rate (1–3%).

I predict that regenerated voice will be a standard pitch male voice. (No chauvinism here, but the female voice is much more difficult to synthesize). The new voice will lack subtle cues for emotional state of the speaker. In essence, the generated speech will have just about the information content of an equivalent printed word message, but without the redundancy of spelling of the printed English word.

Note that I say English here, because that will be the language used in any first-generation voice compression system (VCS). All the advance work in speech analysis/synthesis is in English. Also, English has relatively few phonemes, and is becoming the world's lingua franca.

Smaller is Better

When receivers are white-noise limited, the signal-to-noise ratio (S/N) is proportional to narrowness, required transmitter power is inversely proportional to narrowness, and the number of permissible communication channels within a given band is directly proportional to narrowness of the transmissions.

Many have mentioned an ultimate voice transmission bandwidth of 25 Hz. E.C. Cherry, an early English worker in this field, wrote a paper that suggested this number. I have never seen, however, that value rigorously derived, It's possible, though, that it came from removing the redundancy of spelling from printed matter, then using the true information content (bits) and taking the average person word-speaking rate to compute the bit rate. The average ham QSO information rate is more like ½ that rate, but for now this article will work with the 25 bits/second figure.

Since there's no common system on the market today, I believe that a relatively inexpensive commercial device with a bandwidth as wide as 500 Hz would be quite marketable. Think of the expensive and sophisticated equipment hams gladly acquire to cut the required bandpass of AM to one half with SSB! Imagine cutting the SSB signal bandpass again by a factor of ⅛ or just ½.

Figure of Merit

For discussion purposes, here's an attempt to quantify the quality of DVC systems by using a figure-of-merit (FOM). The FOM is referenced to the "ultimate" 25-Hz passband mentioned above. In this score system, the perfect system, which is the one with a 25-Hz passband, gets 100%. Any system with a wider passband gets a lower score. Where BW = system bandwidth in Hz:

FOM = 100(25/BW)%

The FOM in dB would be:

FOM = 10(log[25/BW])dB

For example, a typical telephone quality link with a bandpass of 250–2800 Hz has a BW of 2550 Hz, in which case, the FOM is only 0.98% or −20 dB regarding the ultimate system.

Please note that for this discussion I assume the permissible bit/second rate is proportional to bandwidth in Hz for simplification purposes. I am aware of Shannons' information theory equations, so in this case let's permit about 1% word error, in which case my assumption is about right for simple pulse modulation with a S/N in the channel of about 15 dB.

Using ultimate VCS system parameters, let's go to the year 2000. The FCC has allocated a 100 kHz slice of the 20-meter phone band to VCS. Rather than allowing 30 simultaneous QSOs with conventional SSB rigs, this band would supporting about 3000 VCS channels and 1 kW transmitters generating the same S/N in receivers that a conventional 100,000 watt SSB transmitter does in an old fashion SSB receiver.

There is one little problem left—how to manufacture a compact, inexpensive 100% FOM VCS? It's impossible to say. I predict, however, that compromised systems in the laboratories today will be seen shortly.

Why Digital Voice?

Many of the early workers in voice analysis/synthesis used analog devices, such as lumped constant filters, electro-optical fre-

quency analyzers/generators, etc. Filters, particularly audio frequency wave filters of this type are large, heavy, and expensive. Fortunately, nearly all the old analog functions can now be equaled (or exceeded) with relatively inexpensive microcomputer chips or dedicated ICs.

Thus, digital processing is applicable to all three "popular" forms of speech synthesis today: formant synthesizers (FS), articulatory synthesis (AS), and waveform concatenation (WC).

Brute force digitizing of voice signals to reproduce telephone quality (e.g., 250 Hz–2800 Hz, and about 26 dB dynamic range) at the receiver is subject to the theoretical Nyquist minimum sampling rate criterion, among other things. But in this case, a practical sampling rate would be 2.5 x 2800 Hz, or 7 kHz. Then to accommodate a full dynamic range of 26 dB (at least 20 level quanta), a 5-bit binary word should be used to define the level of each 1.7000 second level sample of the speech signal. Thus, the minimum digitized voice signal becomes 7000 x 5, or 35 kHz. Since brute force digitization must more or less be used for music (it is so unpredictable), hi-fi digitized music takes awfully wide bandwidths.

Back in 1975, I went through the above types of arithmetical exercises when I sought to develop a real time voice encryption unit used on existing military radios and long distance telephone lines, both of which have the narrow passbands. The thought at the time was to first digitize the voice, then add a number from a pseudo random noise code generator. The receiving end used an identical pseudo random noise code generator. This was synchronized to the transmitter unit to decode the digital word when the random number was subtracted from each digital level word. This system works fine, but only with a passband of 25–35 kHz, a width NBFM military radios don't have.

Redundant Features

Obviously, brute force digitizing was not practical for existing narrow band voice circuits. All early workers agreed. Help came from Claude Shannon's work on information theory.

Harry Nyquist's minimum sampling rate barrier could not be assailed directly—it was written. The bright developers then turned to the basic human speech pattern to look for redundancy, and here they hit pay dirt. Unlike music, voice patterns are quite redundant. The duration of phonemes, basic sounds in speech, is 20–30 milliseconds, so using this knowledge, they believed that they had about 1.30–1.50 of a second in which to encode the phonemes and send a digital word defining each one, rather than a level sample every 1.7000 second. This approach could affect a sample rate reduction of at least 140 (that is, 7000.50). This implied that, regardless of which of the three synthetic approaches one takes, there are about 1.30–1.50 of a second to encode the basic building blocks of speech. And that is a long time for today's digital ICs.

Phonemes

Let's first consider the problem of identifying each phoneme in real time, that is, within about 1.30 of a second. For realism, one must consider the base frequency, amplitude, spaces, and rhythm of the phoneme. It becomes more difficult when considering differences in speech such as accent.

Here is a paraphrase from one of the best state-of-the-art survey papers on speech analysis/synthesis where the waveform concatenation (WC) synthesis is discussed.[1] Klatt says it's possible to consider speech synthesis by concatenation; that is, by stringing together chunks of prerecorded or subroutine generated voice sounds, upon command from a real time speech analyzer. The syllable unit is not practical, because there are over 10,000 different syllables in English. The phoneme appears much more attractive because linguists say about 40 are found in English.

"Digitizing voice could be termed a sort of "audio teletype" where the transmitter operator's voice is automatically encoded into a lowest possible bit rate for transmission"

However, as of September 1987, all efforts to concatenate only 40 phoneme-size samples had failed because of "well-known coarticulatory effects," an effect between adjacent phonemes that cause substantial changes to the acoustic manifestations of a phoneme, depending on the context. Fortunately, these effects tend to be minimal at the center of the phoneme. One worker proposed to generate a synthetic phoneme which he called the "diphone." This comes from a sample made from the center of one phoneme to the center of the next. As 40 squared is 1600, there can be 1600 diphones, but it has been demonstrated that a usable system can work with only 1000.

In addition to the 40 English phonemes, there are about 14 commands for phoneme stress, silence, and syntactic considerations, such as primary stress and question intonation. Diphone duration was not mentioned, and that is important, too. So if one puts the 1000 diphone dictionary into binary code, it will take a 10-bit word. So, accepting a minimum diphone duration of 20 milliseconds, about 50 10-bit diphone words per second for a total bit rate of about 50 bits per second are required. Using the previous S/N link criterion, it would appear that a diphone approach could be realized with a 50 Hz passband, so let's say 100 Hz and be safe for now. In this system, the 1000 diphones for the synthesizer would easily be stored in a small ROM.

Now let us look at another approach to the problem, one that is in much use today.

Waveform Encoding

This second example of analysis/synthesis has been in existence for several years. Examples of instruments using this technique are talking clocks, and the Texas Instruments' "Speak 'n Spell" educational toy.

Waveform encoding works on the wave's time domain, rather than the frequency domain, as do the formant analyzer/synthesizers. It, too, relies on redundance of the phonemic waveforms. The technique, which uses linear prediction encoding of speech waveforms, estimates following waveforms from a weighted sum of about 10 previous waveform samples.[2]

Linear prediction analysis of speech does quite well for storing and playback of complete words or sentences, but for concatenating smaller pieces of speech to form new words or sentences, some difficulties arise. Words per se have been stored in waveform encoding at a rate of 1000 bits/sec in ROM. Compared to brute force binary encoding of voice at 32,000 bits/second, this is an impressive reduction, but using my S/N criterion, the improvement factor amounts to a FOM of 32%. Even so, this technique may be the easiest approach to a first generation system, since TI has the chips.

Demo Record Available

I strongly recommend the reader to copy the 52-page review and tutorial on text-to-speech conversion for English in the Acoustical Society journal. This Dennis Klatt production also included a vinyl demonstration floppy record, 33-⅓ rpm, tucked inside the cover of the Journal. The record demonstrated every practical form of speech synthesis used in the recent past and today. The reader can contact Klatt at Room 36-523 at MIT. 73

Charles WA3YQY has been a ham since 1939, and was first licensed as W2MKO. Though not an expert in voice compression, he has learned quite a bit about the subject during his tenure as a senior scientist for Lockheed Electronics until 1974, and most recently working for International Signal and Control. Charles now runs his own company called Rondout Electronics. His favorite aspect of ham radio is 75-meter and 10-meter phone operation. He also likes photography, yachting, and studying underwater acoustics.

References

[1]Klatt, Dennis H. "Review of text-to-speech for English" pp. 737–793, *Journal of the Acoustical Society of America*, Vol. 32, No. 3, 3 Sept 1987.

[2]Wiggins, R. "An Integrated Circuit for Speech Synthesis," *IEEE Int. Conf. Acoust. Speech Sig. Process. ICASSP-80*, pp. 398–401.

Half-Square QRV-DX Monobanders

Work DX with No Tower and No Amplifier.
Cut noise, cut near sigs, build DX sigs, kill QRM.

10 Meters $29.95 15 Meters $39.95 20 Meters $49.95 30 Meters $59.95

Broadside Pattern, Low Profile, Coax Feed, Ready to Use

Highest DX Gain per Dollar

SASE for F.A.Q.s. To order add $5 Postage & Handling and call or write:

1971 North Oak Lane
Provo, UT 84604-2138

AntennasWest
(801) 374-1084

CIRCLE 236 ON READER SERVICE CARD

THIS MONTH'S GOODIE FROM THE CANDY STORE:
KENWOOD TS-680S



UNDER $1100.00

HUSTLER 6B-TV $117.90 ALL L.T.O.
OVER 8780 HAM RELATED ITEMS IN STOCK, ALL PRICES CASH FOB PRESTON
More specials in classifieds.

LOOKING FOR SOMETHING NOT LISTED?? CALL OR WRITE

ROSS DISTRIBUTING COMPANY
P.O. Box 234,78 South State Street, Preston, Idaho 83263
Telephone (208)852-0830 We Close at 2:00 on MON. & SAT.

CIRCLE 254 ON READER SERVICE CARD

□□□ **ANNOUNCING** □□□
The New Kids On The Block

cpi COMM-PUTE INC (801) 484-7388
1057 E. 2100 So.
Salt Lake City, Utah 84106

Full Line of Amateur Radio and Computer Interfacing Equipment
Call For Grand Opening Specials - Tim W7IQY or Preben K7KMZ

Utah's First Full Service Dealer

KENWOOD ICOM YAESU

CIRCLE 343 ON READER SERVICE CARD

N6KW QSL Cards

The finest QSL Cards at reasonable prices. Basic cards, map cards, cartoon cards, photo cards and more. Your idea converted to ink, or use standard designs. 525 ink colors, any type of card stock. Photos in b/w or beautiful color. Have a card that fits your style. Call or write for free samples and details. Postage appreciated.

Chuck Miller N6KW
KW Litho
P.O. Box 17390
Ft. Worth, TX 76102
(817) 332-3658

CIRCLE 235 ON READER SERVICE CARD

COMMODORE OWNERS!!

12 Volt C64, Vic20 mobile/portable power supplies. Take your computer on Field Day, Vacation, Anywhere!

12 V pwr supply $42.95
1541 12 Volt mod 49.95
Add $6 postage/handling

PACKET RADIO !!

C64 packet modem kits!
Includes Digicom-64, Public Domain TNC emulator disk and all parts to build packet modem.

VHF kit: $29.95
Assembled: 79.95
VHF/HF kit: 39.95
Assembled: 89.95

DEVCOM
336 Joya Loop
Los Alamos, NM 87544
(505) 672-9742
WB5AOX Jim Devenport

CIRCLE 311 ON READER SERVICE CARD

SUPER PERFORMANCE BATTERIES

SUPER ICOM BP-7S, 13.2 volts, 900 ma, double the capacity of the Icom BP-7, 5w output.
SUPER ICOM BP-8S, 9.6 volts, 1200 ma, 50% more capacity than the Icom BP-8.
Both are base charge only, BP-7S or BP-8S $65.00*

Exact replacement FNB-2 Nicad pack for YAESU FT-404R/207R/208R with case. $24.00*

Inserts for:

Kenwood PB-25	**$25.00***	**Icom BP-3**	**$20.00***
Kenwood PB-25H, PB-26	**$27.00***	**Icom BP-5 (500ma)**	**$26.00***

*Add $3 shipping & handling, CT residents add 7½% tax.

Complete line of NICAD packs for Icom, Kenwood, Tempo, Santec, Azden, Cordless Telephones, Alkaline, Nicad, Mercury and Lithium Cells. All battery packs include a 1 year guarantee. Commercial Radio Packs also available.

"Write or call today for a complete catalog."
Dealer inquiries invited.

PERIPHEX Inc.
149 Palmer Road • Southbury, CT 06488

VISA (800) 634-8132 In CT (203) 264-3985 MasterCard

CIRCLE 68 ON READER SERVICE CARD

BATTERIES
Nickel-Cadmium, Alkaline, Lithium, Etc.
INDUSTRIAL QUALITY

YOU NEED BATTERIES?
WE'VE GOT BATTERIES!
CALL US FOR **FREE** CATALOG

E.H.YOST & CO.
EVERETT H. YOST KB9X1
7344 TETIVA RD.
SAUK CITY, WI 53583
ASK FOR FREE CATALOG
(608) 643-3194

CIRCLE 112 ON READER SERVICE CARD

THE EXPERT's EDGE
The **ULTIMATE** computer program for station operation!

GENERAL
Multiple windows with radio, transmit and receive in separate windows-40 function keys user modifiable-Pop up menus to options-Heathkit HV-2000 option allows talking terminal unit and voice keyer!

RADIO
260 Tunable memories for frequency storage and scratch pad operation-Each memory tunable like a VFO.-Control of up to 6 separate radios depending on radio type-Visual tuning on screen with display of frequencies and modes.

TERMINAL
26 Rapid access memory buffers for contests, QSOs.-A built in memory keyer!-Write to file and transmit from file.-Each packet connect in a separate window.-Menus to make operation easier!

CONTESTING/DX
Built-in logging program gets radio frequency, mode, date and time automatically! Look at previous QSO/Contest data on-line.-Logging program allows printing of logs in any format desired.

Radios:	Terminal Units:	Computers:
KENWOOD: TS-940, TS-440, TS-140, TS-680, TS-711, TS-811,	ASCII PK-232 PACKRATT™	IBM PC & CLONES
ICOM: IC-781, IC-761, IC-735, IC-275, IC-375, IC-475, IC-575, IC-751, IC-271, IC-471, IC-1271, IC-471, IC-R7000	HEATHKIT HV-232	IBM PS/2
	KANTRONICS KAM, KPC-4	340K, Color or mono
	MFJ-1270B/1274	
	PAC-COMM TNM-2	
	TNC-200, TNC-220,	Accessories:
	MICROPOWER U-2	HEATHKIT HV-2000 voice synthesizer

$99.95 Pyd plus 7.25% TX tax
EXPERT© —10245 Leatherwood—Fort Worth, Texas 76108—(817) 246-7410

CIRCLE 249 ON READER SERVICE CARD

You Bet Minnesota

YAESU!

Satellite City
12581 Central Ave., Mpls, MN 55434

SATELLITE CITY Communications for the Future

MAY MOBILE MONTH!

National 1-800-426-2891 Local 1-612-754-1200 State 1-800-328-8322, Ext 176

CIRCLE 332 ON READER SERVICE CARD

Voltage Sampling with a Computer

A Practical Project with an A/D Converter

by Joe Magee

Have you ever wondered how long it takes a battery to run down or just what the voltage drop looks like during those last few minutes? How fast does it get light in the morning or dark in the evening? Getting the answers to those and other questions has recently gotten much easier, thanks to Radio Shack.

One of the items introduced in the 1987 Radio Shack catalog is called an "8-Bit A/D Converter IC". The description further states "Complete Data Acquisition System in One IC". That is a big claim—I just had to buy one and find out.

The catalog description was pretty accurate. The only extra components you need are a power supply and a stable reference source. The finished product is an analog-to-digital (A/D) converter with a recommended range between 0 and 5 volts DC with an 8-bit resolution giving 256 steps of value between 0 and 5 volts.

Figure 1 gives the schematic. Everything in the schematic and all the hardware was purchased at Radio Shack and all the Radio Shack part numbers are given.

How It Works

The IC itself is a Texas Instruments TLC548. It contains a complete analog to digital conversion circuit. In addition to the power supply requirements mentioned above, only three data lines are required to interface it to a microcomputer. These lines are chip select, clock, and data.

Basically, to get data from the chip, the chip select line is pulled low, and the most significant bit (MSB) of the previous voltage conversion is presented on the data line. If the

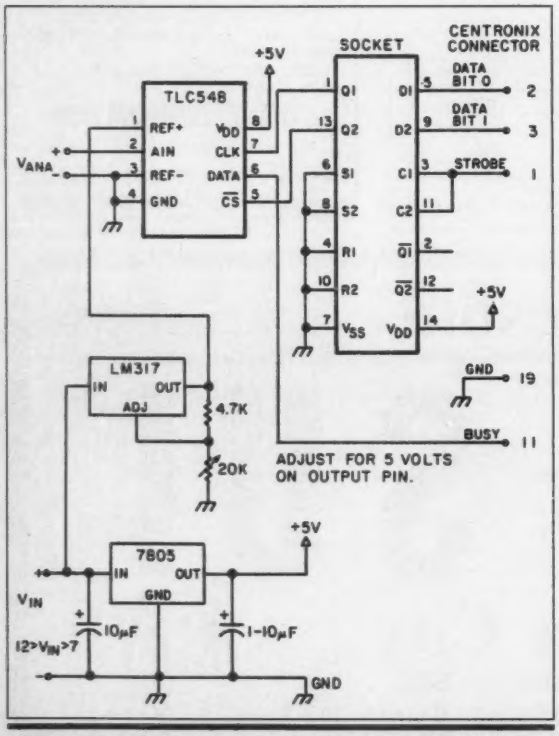

Figure 1. The simple electronics required to interface the TLC858 A/D converter to a Centronics parallel printer port.

```
1 ' ATOD.BA
2 ' JOE MAGEE, APRIL 16, 1987
90 CLEAR 256,62000      ' CLEAR ASSEMBLY LANGUAGE AREA
100 LET PA = 177 ' PIO PORT A, OUTPUT DATA
110 LET PB = 178 ' PIO PORT B, NOT USED
120 LET PC = 179 ' PIO PORT C, BUSY CONDITION RETURN
200 LET CH = 1   ' CLOCK HIGH PATTERN
210 LET CL = 254 ' CLOCK LOW  PATTERN
220 LET SH = 2   ' SELECT HIGH PATTERN
230 LET SL = 253 ' SELECT LOW  PATTERN
240 LET BB = 4   ' BIT POSITION OF DATA RETURN BIT
1000 GOSUB 10000 ' POKE ASSEMBLY LANGUAGE ROUTINE
1005 CLS
1006 RD = 1      ' COUNT OF READINGS MADE SO FAR
1007 PRINT "VOLTAGE ="
1008 PRINT "READING #"
1010 GOSUB 10400 ' LOWER THE SELECT LINE ON CONVERTER CHIP
1090 AN = 0      ' INITIALIZE ANSWER
1100 FOR I = 1 TO 8  ' LOOP READING 8 DATA BITS
1110 AN = (AN * 2) OR ((INP(PC) AND BB) / 4) ' SHIFT IN NEXT ANSWER BIT
1120 GOSUB 10600 ' RAISE CLOCK
1130 GOSUB 10800 ' LOWER CLOCK TO GET NEXT BIT
1190 NEXT I      ' GET ALL 8 BITS FROM CONVERTER
1200 GOSUB 10200 ' NOW RAISE SELECT BIT TO DESELECT CONVERTER CHIP
1290 PRINT @10,"";     ' CLEAR ANY PREVIOUS CONVERSION
1300 PRINT USING "#.##";(AN / 255) * 5.0 ' CONVERT ANSWER TO VOLTS AND PRINT
1310 PRINT @50,"";
1320 PRINT RD    ' PRINT COUNT OF READINGS MADE SO FAR
1330 RD = RD + 1 ' INCREMENT READN' COUNT
1400 AS = INKEYS ' CHECK TO SEE IS OPERATOR WANTS TO STOP
1410 IF AS <> "" THEN 9000 ' QUIT IF ANY KEY PRESSED
2000 GOTO 1010   ' OTHERWISE, GET ANOTHER READING
9000 ' WRAP UP ROUTINE
9100 CLEAR 256,MAXRAM ' RESTORE RAM TO SYSTEM
9999 END         ' DONE
10000 ' GET ASSEMBLY LANGUAGE PROGRAM INTO MEMORY
10010 READ X     ' GET COUNT OF BYTES TO DO
10020 FOR I = 1 TO X ' LOOP POKING INSTRUCTIONS
10030 READ D     ' READ NEXT ASSEMBLY LANGUAGE INSTRUCTION
10040 POKE 62001 + I,D   ' PUT IT INTO NEXT MEMORY LOCATION
10050 NEXT I     ' END OF POKE LOOP
10100 DA = SH    ' SET UP SELECT HIGH PATTERN
10110 GOSUB 11000    ' INITIALLY DESELECT CONVERTER CHIP
10190 RETURN     ' DONE WITH INITIALIZING ASSEMBLY LANGUAGE PROGRAM
10200 ' SELECT HI
10210 DA = DA OR SH  ' INSERT SELECT BIT HIGH PATTERN
10220 GOSUB 11000    ' WRITE NEW PATTERN TO PARALLEL PORT
10390 RETURN
10400 ' SELECT LOW
10410 DA = DA AND SL ' MASK OUT SELECT BIT
10420 GOSUB 11000    ' WRITE NEW PATTERN TO PARALLEL PORT
10590 RETURN
10600 ' CLOCK HI
10610 DA = DA OR CH  ' INSERT CLOCK BIT HIGH PATTERN
10620 GOSUB 11000    ' WRITE NEW PATTERN TO PARALLEL PORT
10790 RETURN
10800 ' CLOCK LOW
10810 DA = DA AND CL ' MASK CLOCK BIT
10820 GOSUB 11000    ' WRITE NEW PATTERN TO PARALLEL PORT
10990 RETURN
11000 ' WRITE PORT A
11010 POKE 62000,DA  ' PUT DATA FOR PARALLEL PORT WHERE IT CAN BE FOUND
11020 CALL 62002     ' CALL ASSEMBLY LANGUAGE PROGRAM TO WRITE DATA AT 62000
11190 RETURN
59999 ' ASSEMBLY LANGUAGE PROGRAM
60000 DATA 16
60010 DATA 243
60020 DATA 58,65,242
60030 DATA 211,177
60040 DATA 62,2
60050 DATA 211,224
60060 DATA 62,0
60070 DATA 211,224
60080 DATA 251
60090 DATA 201
```

Figure 2. BASIC program for TRS-80 Model 100 to read data from the converter.

```
(*********************************************************************)
(*                                                                   *)
(* Module Name:          atod                                        *)
(*                                                                   *)
(* Disk File Name:       atod.pas                                    *)
(*                                                                   *)
(* Purpose:              This program reads the serial analog to digital *)
(*                       converter and displays the result on the screen.*)
(*                                                                   *)
(* Revision History                                                  *)
(* Date     Programmer   Reason                                      *)
(*                                                                   *)
(* Author:               Joe Magee                                   *)
(*                                                                   *)
(* Date Written:         10/02/86                                    *)
(*                                                                   *)
(* Copyright (C) 1986, OH Systems                                    *)
(*                                                                   *)
(* Inputs:               none                                        *)
(*                                                                   *)
(* Outputs:              none                                        *)
(*                                                                   *)
(* Other Info:           none                                        *)
(*                                                                   *)
(*********************************************************************)

program atod;

var
  loop_count:   integer;
  reading:      integer;

{$i atodutil.pas}

begin
  clrscr;
  gotoxy(16,1);
  write('Serial Analog to Digital Converter Data Display');
  gotoxy(1,3);
  writeln('Voltage = ');
  writeln('Reading # ');

  atodinit;
  loop_count := 0;
  repeat
    reading := read_atod;
    gotoxy(11,3);
    write(reading / 255 * 5.0:4:2);
    gotoxy(11,4);
    write(loop_count);
    loop_count := succ(loop_count);
    delay(200);
  until keypressed;
end.
```

Figure 3. Turbo PASCAL program for an IBM PC clone to read A/D data.

```
(*********************************************************************)
(*                                                                   *)
(* Module Name:          various                                     *)
(*                                                                   *)
(* Disk File Name:       atodutil.pas                                *)
(*                                                                   *)
(* Purpose:              This file contains utilities used to read the *)
(*                       serial a to d converter.                    *)
(*                                                                   *)
(* Revision History                                                  *)
(* Date     Programmer   Reason                                      *)
(* 10/05/86 Joe Magee    Modified for IBM PC                         *)
(*                                                                   *)
(* Author:               Joe Magee                                   *)
(*                                                                   *)
(* Date Written:         10/02/86                                    *)
(*                                                                   *)
(* Copyright (C) 1986, OH Systems                                    *)
(*                                                                   *)
(* Inputs:               none                                        *)
(*                                                                   *)
(* Outputs:              none                                        *)
(*                                                                   *)
(* Other Info:           See specifications for TI TLC548 a to d     *)
(*                       converter, sold as Radio Shack 276-1796.    *)
(*                                                                   *)
(*********************************************************************)

const

  busy_bit      = $80;          (* data bit 7 is busy bit           *)
  clk_bit_hi    = $01;          (* clock is bit 0                   *)
  clk_bit_lo    = $fe;          (* lowers bit 0                     *)
  sel_bit_hi    = $02;          (* select line is bit 1             *)
  sel_bit_lo    = $fd;          (* lowers bit 1                     *)

var
  port_data:    byte;           (* image of port 1# data            *)
  cent_port:    integer;        (* port address of lpt1: data       *)
  busy_port:    integer;        (* port address of lpt1: busy       *)

procedure atodinit;
begin
  cent_port := mem[$0040:$0008] + 256 * mem[$0040:$0009];   (* from DOS *)
  busy_port := succ(cent_port); (* status at next address           *)
  port_data := sel_bit_hi;
  port[cent_port] := port_data;
end;

procedure select_lo;
begin
  port_data := port_data and sel_bit_lo;
  port[cent_port] := port_data;
end;

procedure select_hi;
begin
  port_data := port_data or sel_bit_hi;
  port[cent_port] := port_data;
end;

procedure clock_lo;
begin
  port_data := port_data and clk_bit_lo;
  port[cent_port] := port_data;
end;

procedure clock_hi;
begin
  port_data := port_data or clk_bit_hi;
  port[cent_port] := port_data;
end;

function read_atod:integer;
var
  i:        integer;
  atod:     integer;
begin
  atod := 0;
  select_lo;
  for i := 1 to 8 do
  begin
    atod := atod shl 1;
    if port[busy_port] and busy_bit = 0 then    (* busy inverted on IBM *)
      atod := succ(atod);
    clock_hi;
    clock_lo;
  end;
  select_hi;
  read_atod := atod;
end;
```

Figure 4. Utilities for the PASCAL program in figure 3.

clock line is raised and lowered, then the next most significant bit is presented to the data line. After 8 such clock transitions, all 8 bits of the conversion will have been available on the data line. The chip select is then taken high. Following this procedure one will get the previous conversion's data and initiate the next conversion.

"Only three data lines are required to interface (the A/D converter) to a microcomputer."

Connecting these signals to a microcomputer is most easily done through the parallel printer port rather than the serial port, even though this chip provides a serial data stream. Many serial data interfaces from microcomputers do not have clock signals available to send to external devices. Also, they are expecting RS232 voltage levels. On the other hand, a parallel port works with TTL (0 to 5 volt) voltage levels, and these are compatible with the TLC548.

Circuit Specifics

The schematic diagram indicates one IC and two voltage regulators. The IC is the TLC548. One of the voltage regulators is a 7805, or 5-volt regulator. An input voltage of at least 7 volts should be applied to the 7805 to generate a stable 5 volts for the Vcc pin of the TLC548. The other voltage regulator provides a reference voltage for the converter. The converter provides a count, or reading, that is proportional to the ratio of the unknown input analog voltage and the reference voltage. The TLC548 is designed to perform best with a reference voltage of 5 volts.

The voltage reference should be as accurate and stable as possible, and semiconductor devices exist for this purpose; however, Radio Shack does not stock any. Thus, the second voltage regulator is provided. Another 7805 was not used since these regulators are not specified to be exactly on 5 volts. Instead, an LM317 was selected. It is an adjustable regulator. After connecting power the first time, it was calibrated using an external voltmeter to provide as close to 5 volts as possible to the TLC548 for its reference voltage input. This is not as accurate or stable as would be desirable, but it is about all Radio Shack has to offer.

The specifications for the TLC548 imply that the maximum allowable input voltage on the analog (or unknown) voltage pin is Vcc + 0.3 volts and the minimum allowable voltage is -0.3 volts. With this restriction in mind, the -Vref pin and the chip ground pin are tied together. This means that the converter does not appear to have a true differential input and will measure only ground-referenced signals.

Other Hardware Considerations

In order to make this unit easy to interface to a large number of computers, I chose to use a 5-pin DIN connector on its I/O interface. Thus, with only one interface cable, the unit should interface to nearly any computer with a standard Centronics interface. If the computer has some sort of other connector on its parallel interface, a different cable will be required.

The circuit is constructed on a standard perfboard, catalog number 276-158. It is housed in a box, 270-627, which required several holes drilled and filed into it. Power is supplied by a 9 VDC wall transformer, 273-1455.

Some computers use the parallel printer port for more than one thing. This will cause extraneous signals to appear on the lines, which will confuse the TLC548. In order to avoid this, some type of latch was required. The extra IC, an MC14013, is a dual flip-flop capable of latching two data lines. Just enough for the chip select and clock. These data lines are latched into the MC14013 by using the strobe signal, also part of a

standard Centronics interface. On the converters I constructed, a socket for the MC14013 was included on the perf board along with a dummy socket not connected to anything. A header shorts pins 1 and 5 together and pins 9 and 13 together. Thus, if the computer in question had no extraneous signals on the parallel port, then the header would be put in the MC14013 socket. If required, the MC14013 itself would go into the socket. The unused device should then be stored in the dummy socket.

Software Requirements

Using the parallel printer port on a microcomputer solves some problems, but it raises others. The good points are that individual lines are easily controlled. This makes it easy to raise and lower the chip select and clock lines from software. However, very few parallel ports are bi-directional. By that, I mean that they are almost always output lines. There is no way to tell what the TLC548 is trying to send back.

However, all parallel printer ports have a busy line. Thus, to find out what value the converter is sending back, one needs only to monitor the busy line. The problem with this is that no popular microcomputer operating system allows for easy checking of the busy line of the parallel port. Moreover, trying to output anything to the port, such as new clock information, will not happen if the busy line is high. The operating system assumes a high level to mean that the printer is not available for new data.

In short, to use this converter, you must know something about hardware of the parallel printer port and write a program that can manipulate it properly. I will discuss three computers and give information required to communicate with the converter through their parallel printer ports.

The TRS80 Model 100

I chose this computer for the project because it is from Radio Shack and battery powered. This means that a remote data gathering setup is possible if the converter circuit is also powered from a battery. This is easy to do with any voltage greater than about 7 volts. Also, the Model 100 parallel port serves multiple purposes requiring the use of the MC14013 latch on the data lines.

Figure 2 is a listing of the BASIC program used to continuously read a voltage from the converter. The data statements are for a small assembly language routine used to send data to the parallel port. This routine is needed to disable hardware interrupts while this program sends data to the converter. It is a lot faster than using BASIC to send the same data out the port.

The BASIC program is short and to the point. The first few lines set up the needed constants. PA, PB, and PC are the addresses of the parallel ports in the 81C55 chip, a parallel I/O adapter. CH and CL are used to raise and lower the clock bit in the parallel printer port data byte. As each bit is taken from the converter chip, the next one must be clocked out by making the clock line high and then low. Data bit 0 is used as the clock bit. SH and SL are used to select and deselect the converter chip. In order for the chip to deliver the converted data and accept clock bits, it must be selected. This is done by lowering the select bit. In this application, the select bit could be left lowered, thus selecting the converter all the time, because no other hardware shares the data lines used to communicate with the TLC548. Finally, the variable BB defines the bit position held by the BUSY line in the status byte appearing on port c, PC, of the pio.

The program clears the screen and prints headings used to identify the value just read and how many times a value has been read. To read data from the converter, the program lowers the select line, uses a loop to clock in the 8 data bits, and then raises the data line.

Examining the loop reveals that the level of the data bit from the TLC548 is read in. As it is read in, it is shifted from bit 2 to bit 0 by dividing the input value by 4. The answer is then masked with a value of 1 to

```
{*************************************************************************}
{*                                                                       *}
{* Module Name:          atod                                            *}
{*                                                                       *}
{* Disk File Name:       atod.pas                                        *}
{*                                                                       *}
{* Purpose:              This program reads the serial analog to digital *}
{*                       converter and displays the result on the screen.*}
{*                                                                       *}
{* Revision History                                                      *}
{* Date     Programmer   Reason                                          *}
{*                                                                       *}
{* Author:               Joe Magee                                       *}
{*                                                                       *}
{* Date Written:         10/02/86                                        *}
{*                                                                       *}
{* Copyright (C) 1986, ON Systems                                        *}
{*                                                                       *}
{* Inputs:               none                                            *}
{*                                                                       *}
{* Outputs:              none                                            *}
{*                                                                       *}
{* Other Info:           This program released into the public domain    *}
{*                       for non-commercial purposes. Joe Magee 04/16/87 *}
{*                                                                       *}
{*************************************************************************}

program atod;

var
  loop_count:   REAL;
  reading:      integer;

{$i atodutil.pas}

begin
  clrscr;
  gotoxy(16,1);
  write('Serial Analog to Digital Converter Data Display');
  gotoxy(1,3);
  writeln('Voltage = ');
  writeln('Reading @ ');

  loop_count := 0;
  repeat
    reading := read_atod;
    gotoxy(13,3);
    write(reading / 255 * 5.0:4:2);
    gotoxy(11,4);
    write(loop_count:6:0);
    loop_count := loop_count + 1;
    delay(200);
  until keypressed;
end.
```

Figure 5. Turbo PASCAL routine for the Kaypro 4-84 computer to read and display the digitized data.

```
{*************************************************************************}
{*                                                                       *}
{* Module Name:          various                                         *}
{*                                                                       *}
{* Disk File Name:       atodutil.pas                                    *}
{*                                                                       *}
{* Purpose:              This file contains utilities used to read the   *}
{*                       serial a to d converter.                        *}
{*                                                                       *}
{* Revision History                                                      *}
{* Date     Programmer   Reason                                          *}
{*                                                                       *}
{* Author:               Joe Magee                                       *}
{*                                                                       *}
{* Date Written:         10/02/86                                        *}
{*                                                                       *}
{* Copyright (C) 1986, ON Systems                                        *}
{*                                                                       *}
{* Inputs:               none                                            *}
{*                                                                       *}
{* Outputs:              none                                            *}
{*                                                                       *}
{* Other Info:           See specifications for TI TLC548 a to d         *}
{*                       converter, sold as Radio Shack 276-1796.        *}
{*                                                                       *}
{*                       This program released into the public domain    *}
{*                       for non-commercial purposes. Joe Magee 04/16/87 *}
{*                                                                       *}
{*************************************************************************}
const

  cent_port     = $18;          (* centronics data port                 *)
  busy_port     = $14;          (* centronics busy signal port          *)
  busy_bit      = $40;          (* d6 is busy bit                       *)
  clk_bit_hi    = $01;          (* clock is bit 0                       *)
  clk_bit_lo    = $fe;
  sel_bit_hi    = $02;          (* select line is bit 1                 *)
  sel_bit_lo    = $fd;

var
  port_data:    byte;           (* image of port 18 data                *)

procedure atodinit;
begin
  port_data := sel_bit_hi;
  port[cent_port] := port_data;
end;

procedure select_lo;
begin
  port_data := port_data and sel_bit_lo;
  port[cent_port] := port_data;
end;

procedure select_hi;

begin
  port_data := port_data or sel_bit_hi;
  port[cent_port] := port_data;
end;

procedure clock_lo;
begin
  port_data := port_data and clk_bit_lo;
  port[cent_port] := port_data;
end;

procedure clock_hi;
begin
  port_data := port_data or clk_bit_hi;
  port[cent_port] := port_data;
end;

function read_atod:integer;
var
  i:        integer;
  atod:     integer;
begin
  atod := 0;
  select_lo;
  for i := 1 to 8 do
  begin
    atod := atod shl 1;
    if port[busy_port] and busy_bit <> 0 then
      atod := succ(atod);
    clock_hi;
    clock_lo;
  end;
  select_hi;
  read_atod := atod;
end;
```

Figure 6. Utility routines for the program in figure 5.

isolate the bit. Then this value is added to the variable AN, thus building the final answer.

The converter chip yields a number from 0 to 255. This number is the ratio between the analog input voltage and the analog reference voltage on the chip. The actual voltage read can be calculated by multiplying the reference voltage by the ratio of the returned count and maximum count.

For instance, if the input voltage is exactly 1 volt, the ratio of 1 to 5 is .2. The value read will be .2 times the maximum count (255) or 51. Dividing this value by the maximum count will give this ratio, and then multiplying the ratio by the reference voltage gives the answer: (51/255) x 5.0 = 1.0.

The rest of the program is devoted to displaying the answer and checking the keyboard. If the operator presses any key, the program terminates.

The small assembly language routine actually writes the clock and select line levels to the converter ship. Because the data lines used in the parallel port are shared by the keyboard scan hardware, this scan must be stopped while the converter is communicated with. In addition, while not addressing the TLC548, the data lines on the port change value while the keyboard is scanned. This dynamic changing data pattern confuses the converter and cause invalid results to be obtained. To avoid this problem, a latch is installed in the converter circuit as discussed above. The strobe line, a part of all parallel printer interfaces, is used to latch the desired levels of the clock and select lines to the TLC548. The strobe line toggling is also handled by the assembly language routine.

A/D Converter Parts List

TLC548 8-bit D/A converter	RS #276-1796
7805 5-volt regulator	RS #276-1770
LM317T adjustable regulator	RS #276-1778
10 uf capacitor	RS #272-1013
4.7 kΩ ¼ resistor	RS #271-0340
20 kΩ variable resistor	RS #271-1330
Optional parts:	
5-pin DIN jack	RS #274-0005
8-pin W/W socket	RS #276-1988
16-pin W/W socket	RS #276-1994
DC power connector	RS #274-1575
Experimenter's box	RS #270-0627
Perf board	RS #276-0162
Wall power supply	RS #273-1455

Ubiquitous PC Clone

One good thing about IBM computer clones is the care taken to match the IBM hardware. This means that nearly any PC-DOS or MS-DOS computer with a parallel printer port will probably have exactly the same hardware at an I/O address that is easily obtained. Figure 3 is a Turbo Pascal program that will obtain the address of the LPT1: port and use it to read the converter.

The main portion of the program is very short. We will cover it first. As in the BASIC program, the screen is cleared and descriptive titles are printed. In addition, a loop or reading counter is initialized.

The rest of the program (figure 4) is in a file called "atodutils.pas". This file contains procedures and functions to initialize the IBM hardware and to take a reading from the analog to digital converter.

Reviewing this file, the definitions of the various bits and their positions comes first. In the IBM program, the address of the parallel printer port must be determined. The operating system conveniently keeps this address at location $0040:$0008. This is a strange looking address. The first number, $0040, is the paragraph number to use as the base of the actual physical memory address. A paragraph is 16 bytes long. In the Intel 8088 world, memory addresses are defined as a base address and an offset. Each base, or paragraph, address can point to up to $10000, 65536, individual physical addresses. These numbers are called the offset, and they form the second part of the address description; that is, the ":$0008" above.

In any case, as mentioned, the contents of that address is the base port address of the parallel printer port assigned as LPT1. The data for the port is at the base address, and the status is at the next higher address.

In addition to getting the address, the initialization program also sets the select bit high on the TLC548. It also initializes a variable, "port-data," to equal the value just written. This is necessary, because the value just written cannot be read back in from the data port. The only way to know the value is to save it somewhere. Notice that in this case, no strobe line toggle is necessary. The IBM, the parallel printer port is dedicated to the printer alone and no other data will appear on it. Thus, the latch in the converter circuit is removed. In my prototype, I simply unplugged the MC14013 device and replaced it with the jumper block already described and stored the MC14013 in the spare socket.

The function that reads the measured value is simpler than it looks. It starts out with a read value of 0 and adds in the values from the TLC548 one at a time.

The first step is to lower the select line as in the BASIC program. Notice that this is done by a logical AND between the current value in the parallel port with a constant called "sel_bit_lo." "Sel_bit_lo" has a value of $fe. When this value is ANDed with the port value, bit 1 of the port value will unconditionally set to 0, and all others will remain as they were. In the value $fe, bit 1 is a zero, and all others are ones.

Most of the rest of the function is a loop that gets the current data bit from the converter chip and saves it. First the accumulated answer is shifted to the left to make room for the next data bit. The data bit value comes in on the busy bit of the printer port. In the IBM this bit is inverted. Once again, the logical AND trick is used to determine the value. In this case the constant is $80, because the busy signal is in bit 7 of the status data. This time, we want to know the value of that bit, so all the other bits are 0. Thus, with a logical AND all bits will set to 0 except bit 7. Bit 7 will be remain unaffected. If it is 0, then the bit coming from the TLC548 was a 1 and the least significant bit of the answer is set to a 1 by simply adding 1 to the value. Then the clock line on the converter chip is toggled to bring out the next data bit. After the loop, the select line is returned to a high value, and the converted value is returned to the procedure that called the read-atod function.

The main routine calls the read function. It then takes the converted value and makes it into a voltage, just as in the BASIC program above. This value is displayed on the screen. A small delay is included in the program to make the answer readable. If the voltage read is not exactly on a value that is one of the 256 steps between 0 and 5 volts, the answer may fluctuate between the closest such values. This program can read and display the voltage so quickly that the screen display can flicker between the different values and the actual number cannot be read before it changes. The small delay gives us poor humans a chance to catch up with the machine. The last statement is a check of the keyboard. If any key is pressed, the program stops.

The Pickup Truck of the CP/M World

The CP/M world is not as lucky as the MS-DOS world. Standardization of port addresses and hardware did not occur. I have several CP/M computers, but the one that I use the most is a Kaypro 4-84. It is representative of a CP/M computer, and the parallel port on it is similar to other Kaypro 8-bit computers. The program (figures 5 and 6) is very similar to the one for MS-DOS, since it also is written in Turbo Pascal. However, the programmer must determine the address of the parallel printer data and status ports. This information is available in the documentation which comes with the Kaypro. As in the IBM, the printer port is dedicated to the printer and no strobe line toggling is required. If you have a different CP/M-80 computer, this program can be used if you determine the hardware addresses of your printer data and status ports. You will also need to know the location of the busy line bit in the status port, and whether any other data appears on that port. Most likely, however, in a CP/M computer the data port will be dedicated to the printer.

There you have it. Get busy! If you have a computer, you should be able to go down to Radio Shack and get the parts needed to let you too turn it into a voltmeter. Next week you should be able to tell me things like how long it takes a battery to discharge, or what time the sun came up 7 days in a row, or maybe the average S-meter reading on 20 meters over a 24 hour period. Let's see, how about the temperature for the last 24 hours? I'll have to think about that one. 73

VISA

ICOM

MasterCard

VHF COMMUNICATIONS

INTRODUCING W2DRZ
VHF/UHF MODULES. NOW AVAILABLE
A 4 STAGE SEQUENCER
INTRODUCTORY PRICE $34 PREPAID
DEALER INQUIRIES INVITED
ICOM, AEA, LARSEN, VAN GORDEN,
VIBROPLEX, NYE-VIKING, FALCON COMM,
LEADING EDGE, ARRL PUBLICATIONS,
KAGLO, HAMTRONICS, PROWRITER,
ELEPHANT DISKS, DEBCO, TRIONYX

915 North Main Street
Jamestown, New York 14701

Visitors Now Week's Great... another radio dealer!
PH. (716)664-6345

CIRCLE 298 ON READER SERVICE CARD

Discover
CAROLINA WINDOM

80–10M
Use transmatch
132' overall
Matching XFMR
Line Isolator
Vert Radiator
Coax fed
Assembled
$69.95

High performance
Proven Results
$70 Beam?

The RADIO WORKS

Your
Passport
To a world
Of new ideas
And exceptional
HF wire antennas

Rugged new baluns
Full range of HF, VHF
mobile antennas, ducks, wire,
coax, parts, line, accessories.

SEE WHAT WE'RE DOING NOW!
Contact Jim, W4THU—free discount catalog
Send $1 for catalog by 1st Class mail.
Box 6159, Portsmouth, VA 23703
(Dealer Inquiries Welcome)

804-484-0140

CAROLINA WINDOM
SEE THE REVIEW IN JUNE '88 WORLD RADIO MAGAZINE.
Enthusiastic users say it's the best wire antenna. Outperforms wire antennas previously used. Knock-you-socks-off performance on 80–10. A $70 beam?
If you hear one, you'll want one.
Made with pride by the RADIO WORKS in VA/USA

CIRCLE 150 ON READER SERVICE CARD

CUSTOM EMBROIDERED
QUALITY HAM HATS



Display your **name, call and hometown** on our **top quality** summer mesh cap with white seamless front and matching bill $7.95 ea
They come in **royal blue, red & brown** with matching color thread
WINTER CORDUROY also available in red & navy blue with white thread $8.95 ea
Please send: first & last name (max. 14 ltrs)
call (max. 6 ltrs), city & state (max. 14 ltrs)

BE SURE TO INCLUDE COLOR
Send Check or Money Order, Plus $3.00 Shipping and Handling Per Order. Add 25¢ for each add'l cap ordered.
ALLOW 3 TO 5 WEEKS FOR DELIVERY. MD RESIDENTS ADD 5% SALES TAX
WE WELCOME INQUIRIES FROM CLUBS

Embroidery Warehouse
P.O. Box 1476 • Severna Park, MD 21146

Multiband QRV Dipole/V/Sloper

Ready to Use
Fastest Install
Coax Feed
2500 V Insul

Tough
Flexible
Kink-Proof

Full Legal Power
No Lossy Traps
Low Noise
Never Corrodes

QRV-80-10 $49.95 51 ft. long
QRV-160-10 $59.95 102 ft. long

Prices include 47 page Tech Manual
To order add $5 Post & Handling.
1971 N. Oak Ln.
Provo, UT 84604
Info: 56¢ S.A.S.E.
AntennasWest
(801) 374-1084

CIRCLE 303 ON READER SERVICE CARD

Peoria Area Amateur Radio Club
presents
SUPERFEST '88
Sept. 17-18
at
Exposition Gardens, Peoria, Illinois
For Radio Amateurs and Computer Enthusiasts

See...
Amateur Radio Equipment and Accessories
Home and Professional Computers
Parts and Components
Large Flea Market

Hear...
Wayne Green, publisher "73 Amateur Radio"
Packet Authority Jim Grubbs
Tickets $4 Advance/$5 Gate
Lots of Prizes
Commercial Buildings Open at 9 a.m.

FOR MORE INFORMATION AND TICKETS, WRITE (SASE PLEASE):
SUPERFEST '88, P.O. BOX 3461, PEORIA, IL 61604
OR CALL 309-674-5656

CIRCLE 341 ON READER SERVICE CARD

CHANGE OF ADDRESS?
CALL TOLL-FREE:
1-800-227-7585
Please allow 6 weeks for processing.

NEW!
MORSE TUTOR
Made Easy & Fun

Introducing the most Comprehensive and Easy-to-Use code course available today!
—MORSE TUTOR is available for IBM PC, XT, AT, PS/2 and compatibles.

FEATURING!
★ 1–100 word/minute code speeds
★ Standard or Farnsworth modes
★ Adjustable code frequency
★ Over 1 Billion possible random QSOs
★ Letter, number, and punct. mark coverage
★ Self calibrating/menu drive design
★ Display text—while listening or after copying

To Upgrade or learn CW, Send check or M.O. for $19.95 + $2 S&H to:

GGTE
21881 Summer Circle, Dept. MTS
Huntington Beach, CA. 92646
CA. Residents add $1.20 sales tax

CIRCLE 339 ON READER SERVICE CARD

TWO TNC's in your IBM® PC!

The PC*Packet Adapter gives you two independent packet radio TNC's on one short PC plug-in card. Its on-board 1200 baud modem connects directly to your VHF/UHF radio. Add DRSI's HF*Modem with internal tuning indicator and you have another TNC in your PC. Our AX.25 software package includes simultaneous dual-port operation, multiconnect on both ports and cross-band digipeating. Introductory price for the PC*Packet Adapter is $119.95 until July 1. The HF*Modem is $59.95. Call today, get on the air tomorrow!

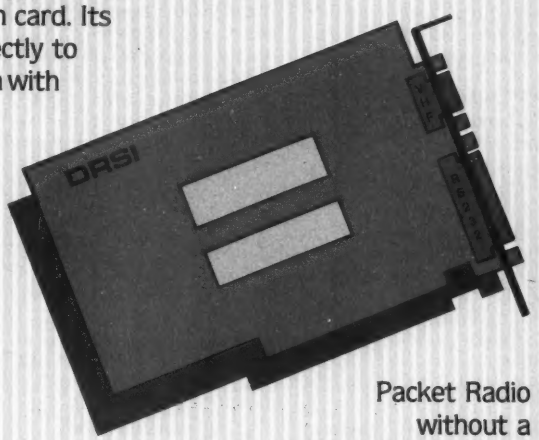

Packet Radio
without a
Packet Radio TNC

HAM-COM June 3, 4, 5 Dallas-Ft. Worth

DRSI

Digital Radio Systems, Inc.

2065 Range Rd. ▲ Clearwater, FL 34625 ▲ (813) 461-0204

CIRCLE 239 ON READER SERVICE CARD

NUTS & VOLTS MAGAZINE

P.O. Box 1111-A
PLACENTIA, CA 92670
714-632-7721

- Ham Radio
- Computer Hardware
- Computer Software
- Plans-Kits
- Schematics
- Test Equipment
- CB Gear
- Satellite TV
- Video
- Components
- Antique Electronics
- Cable TV
- Publications
- Repairs-Services
- New Products
- Events Calendar

IF YOU ARE INTO ELECTRONICS AND SAVING MONEY IS IMPORTANT TO YOU, THEN YOU OWE IT TO YOURSELF TO TRY NUTS & VOLTS MAGAZINE. DISCOVER WHY THOUSANDS OF SMART PEOPLE NATIONWIDE TURN TO NUTS & VOLTS EACH MONTH TO MEET THEIR ELECTRONIC NEEDS. WHETHER YOU'RE BUYING, SELLING, OR JUST TRYING TO LOCATE THOSE UNIQUE OR HARD-TO-FIND ITEMS, FIND OUT HOW NUTS & VOLTS CAN HELP!

SUBSCRIBE TODAY!

☐ CHECK ☐ MONEY ORDER ☐ VISA ☐ MC

Name_____

Address_____

City_____

State_____ Zip_____

Card No._____ Exp. Date_____

CALL FOR ADVERTISING INFORMATION
DISTRIBUTOR INQUIRIES INVITED

Subscription Rates
U.S. FUNDS REQUIRED

3rd Class Mail - USA

One Year	$12.00
Two Years	$21.00
Lifetime	$60.00

1st Class Mail

One Year - USA	$20.00
Canada & Mexico	$22.00

Air Mail

Foreign - 1 Year	$55.00

Includes one FREE 40-word Classified Ad

A National Publication For The Buying And Selling Of Electronic Equipment

CIRCLE 296 ON READER SERVICE CARD

PACKET TALK

Latest in Digital Hamming

Brian Lloyd WB6RQN
19200 Tilford Way
Germantown MD 20874

Building a Duplex Digipeater

I promised some time ago to present details of the duplex digipeater that our group uses in the Washington DC area. It's a simple device that requires little hardware and no software.

The first step in constructing a duplex digipeater is to choose a frequency and a site. The group chose the frequency pair on 220 MHz to conform with standard voice repeater operations, i.e. frequency and split. The group's initial duplex digipeater had the frequency assigned and coordinated by The Mid-Atlantic Repeater Council (TMARC) as if it were a voice repeater.

Since that time, there have been changes in Part 97 of the FCC regulations that differentiate between digital communication devices and ordinary repeaters. It's now permissible to construct a duplex digipeater and operate it in any portion of the amateur radio spectrum above 50 MHz where the emission mode is legal, provided the transmissions use the AX.25 protocol. This means a duplex digipeater can operate on two meters outside the standard repeater subbands of 144.5–145.5 and 146–148. Our group has two new duplex digipeaters under construction that have inputs in the range of 145.6–145.7 and outputs in the range of 145.0–145.1, using the standard 600-kHz split.

Hardware Selection

There are four major pieces of the duplex digipeater: the duplexer, the receiver, the modem, and the transmitter. The duplexer is any standard duplexer used for normal repeater operation. Our group has been quite satisfied with the performance of a WACOM four-cavity duplexer.

The receiver is any NBFM receiver. The group uses a Midland 13-509, but just about any receiver should do. A receiver designed for repeater service is a better choice due to the higher quality and wider environmental tolerance designed into these devices.

The group's modem is a Bell 202T look-alike produced by Rixon found at a hamfest for about $40. This turned out to be a very good performer, because its carrier detect circuitry doesn't trigger on voice signals. Only a valid Bell 202 carrier causes the carrier detect to assert. This is very important, because the carrier detect signal of the modem is used to key the transmitter.

The transmitter is the transmitter section from a Midland 13-509 but just about any NBFM transmitter will do. As in the case of the receiver, a transmitter designed for repeater service is probably the best choice. Be sure to have full schematics for the transmitter for slight modifications to ready it for duplex digipeater operation.

Signal Flow

It's imperative to have the duplex digipeater key and unkey very rapidly in response to packets at the input. The duplex digipeater output alerts all other users to activity on the channel and to stand by until the channel goes clear. This is what carrier sense multiple access (CSMA) is all about. In order for this to work, the duplex digipeater needs to key up the transmitter as soon as a valid data carrier is detected by the modem. The following diagrams and directions should help.

The incoming signal goes directly from the detector in the receiver. The receiver's squelch and COR (if it is a repeater receiver) are NOT used. The signal from the detector travels to the buffer amplifier shown in Figure 1. Buffer adjustment consists of applying a 5 kHz deviation, 2200 Hz modulated signal to the receiver, and adjusting R2 to provide a 0.77 Vrms (0 dBm) signal at the buffer output.

The buffer output goes to the input of the Bell 202T modem. The data output of the modem is looped back to the data input of the modem, regenerating the tones. The modem output goes to the transmitter input AFTER all signal processing stages. The modem signal MUST enter the transmitter as close to the modulator as possible. Be sure to bypass all microphone preamp, limiter, and low-pass filtering circuits in the transmitter. Usually the wiper of the deviation control is a good place to inject the signal (See Figure 2). Adjust the modem output level so the 2200 Hz high tone produces exactly 3 kHz deviation.

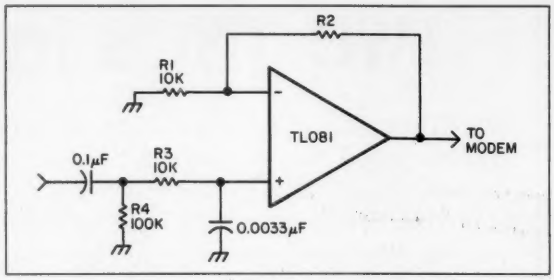

Figure 1.

The transmitter requires one special modification in order for it to key very rapidly and still provide good signal stability. Wire the transmitter so all stages are powered all the time. In order to key and unkey the transmitter rapidly, one of the intermediate stages in the transmitter needs to be keyed. Since the amplification and multiplication stages of most FM transmitters operate Class-C, the transmitter is stable and quiet with no drive. I modified the last multiplier stage so its emitter is keyed by a small keying transistor, which is turned on (keyed down) by the application of a positive voltage. Be sure to use plenty of bias on the emitter of the keyed stage to ensure its continued stability. See Figure 3.

"A duplex digipeater can operate on two meters outside the standard repeater subbands."

In a Nutshell

A received signal is amplified and buffered by the buffer amplifier and presented to the demodulator in the modem. Only a valid data signal activates the data carrier detect (DCD) line. The DCD line turns on the keying transistor, which pulls the emitter of the last multiplier stage to ground turning the multiplier on. This allows RF to pass from the multiplier to the amplification stages in the transmitter (our transmitter keys in about five microseconds). The data is detected by the demodulator in the modem and passed to the modulator through the jumper between pins 2 and 3 of the RS-232 connector. The regenerated tones now modulate the transmitter.

So far this technique has worked very well. The keyup delay is only 8 msec—essentially the time it takes the modem to detect carrier. Since the modem does a very good job at differentiating between noise, voice, and valid data, it's almost impossible to get the duplex digipeater to falsely key up. The duplex digipeater remains keyed until the signal goes away. (One can always add a watchdog timer that will unkey the transmitter after some period of time, say a minute, should someone's TNC stay on the air too long.)

Since the duplex digipeater has no IDer of its own, one of the TNCs on the frequency should broadcast an ID packet for it at least every 10 minutes. This should keep everybody happy and everything legal.

A Few Caveats

Don't try to use the COR in an existing repeater receiver to key the transmitter. The squelch in most receivers is too slow to work effectively and it cannot differentiate between a voice and a data signal. The duplex digipeater must pass only data to be eligible for operation outside the repeater subbands.

Don't try to key the transmitter by keying the audio and oscillator stages of the transmitter (this is how most repeater transmitters are keyed). The transmitter needs to key up more quickly than most of these stages can accommodate.

Use a Bell 202T modem that

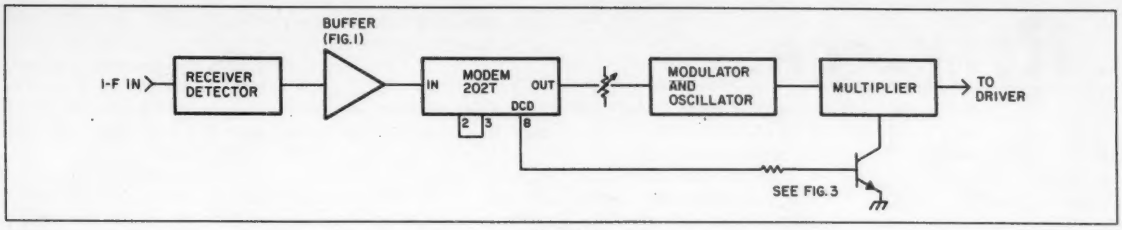

Figure 2.

does not falsely trigger on voice or noise. For this reason, neither the 2211 PLL nor the 7910 world modem chips used in most TNCs are suitable. The 2211 will not reject voice and the 7910 will assert DCD for any signal, even noise.

Go build one! Find out what packet radio is like when everyone in your area can "hear" everyone else. Just be sure to remind users to turn on the duplex switch on their radios prior to attempting connections to their neighbors directly (no digipeater specification required).

Backbones

One of the biggest problems facing amateur packet radio is how to build long-haul networks that pass data efficiently without losing it. Digipeaters were not very useful for constructing long-haul backbones. Packet loss rates rendered them useless for more than one or two hops. The proliferation of NET/ROM and bulletin boards was an attempt to solve this problem. Bulletin boards act as store-and-forward devices and NET/ROM added link-layer acknowledgments (hop-by-hop ACKs) in an attempt to make each link appear to be more reliable. This improved things somewhat but didn't solve the problem. It just made it less visible. The real solution is to make the links truly reliable.

The measure of link reliability is its packet loss rate. A reliable link doesn't lose packets. Packets are lost for two major reasons: poor link implementation and collisions. The reliability of a link can be improved by properly adjusting the modems, radios, and antennas to ensure that transmitted packets will be received with a very low probability of error. Collisions can be avoided by ensuring that only one transmitter uses the frequency.

The first suggestion, proper installation and adjustment of the hardware, seems straightforward but the second suggestion, that of having a single transmitter to a frequency, seems rather unusual. How can there be a network with only one transmitter to a frequency? The key to this issue is proper network topology. It requires some rethinking about packet radio based networks.

Collision-Free Network

Phil Karn KA9Q wrote a very interesting paper for the ARRL 6th Computer Networking Conference entitled "A High Performance, Collision-Free Packet Radio Network." The interesting thing about Phil's paper is that the concepts presented therein apply to any radio-based network regardless of networking protocol! These concepts will work for TEX-Net, NET/ROM, TCP/IP, ROSE (COSI), or even plain vanilla AX.25 with digipeaters. A network based on Phil's ideas, in addition to being collision-free, is also inherently full duplex! Here is a general description of how a network based on Phil's ideas would work.

Every node in the network has one and only one transmitter. That transmitter operates on a frequency assigned to only it for a region. Each of the adjacent network nodes has a dedicated receiver and possibly an antenna to listen to that frequency. This means that each node in the network has one transmitter on its own frequency and one or more receivers each tuned to the transmit frequency of the adjacent network nodes. The transmitters should probably use omnidirectional antennas and the receivers should use directional antennas to increase link signal margin and reduce interference from undesired signals.

To make the network easier and less expensive to implement the transmitters at adjacent nodes should probably operate on different amateur bands. This reduces or eliminates the need for cavities or duplexers at a site.

Do not discount 6m and 2m as link bands. Users can transmit signals up to 20-kHz wide on these two bands. The 220 and 430 MHz bands allow signals up to 100 kHz wide. For bands above 450 MHz, the signals can be as wide as the band itself. Based on these bandwidths, speeds of 9,600 bauds (6m and 2m), 56,000 bauds (220 MHz and 430 MHz), and 10 Megabauds (902 MHz and up) are possible.

The packet switch hardware at each node must handle multiple receivers and a single transmitter. Currently the KA9Q TCP/IP networking code supports this topology and, with only a slight modification, the multiport digipeater and NET/ROM code could also. Imagine a network where eight digipeater hops are considered normal and acceptable with negligible packet loss rates!

Users should have access to the network on a seperate band from backbone links. This is where the duplex digipeater comes in. Local users communicate with one another through the duplex digipeater. Should someone wish to communicate with another user reachable only through the network, the packets are switched off the LAN and onto the backbone. When the packet finally arrives at the destination LAN, it is switched to the duplex digipeater and then delivered to the destination.

Our group is constructing a network that uses duplex digipeaters to define and support the LANs and has a collision-free backbone to tie the duplex digipeaters together into a single network. The network node switches will support NET/ROM, TCP/IP, and AX.25 digipeater connections. Users will have their choice of networking protocols all with a very high probability of packet delivery. I will keep the readers posted on this progress.

NET/ROM Update

There are two significant developments of interest to the NET/ROM users. First, the Northern Germany Packet Group has written a NET/ROM replacement package and placed it into the public domain. This package is fully compatible with NET/ROM version 1.3, but has no encrypted callsigns. The software is in the public domain and is available in either source ('C' plus a tiny bit of assembler) and/or object code format. Those interested in information or a copy of the software should contact:

Michael Roehner DC4OX
Hans Georg Giese DF2AU
Hinter dem Berge 5
D3300 Braunschweig, FRG

There is also a new version of the KA9Q TCP/IP code that is NET/ROM compatible. This code permits a TCP/IP station to be part of a NET/ROM network, passing both AX.25 and TCP/IP traffic over the same link at the same time. This code doesn't support end-user NET/ROM access (i.e., it does not allow connections with an ordinary TNC), but it's ideal for a backbone packet switch with restricted backbone access. A vote of thanks and a hearty "well done" go out to Dan Frank W9NK for this addition to the KA9Q TCP/IP net package.

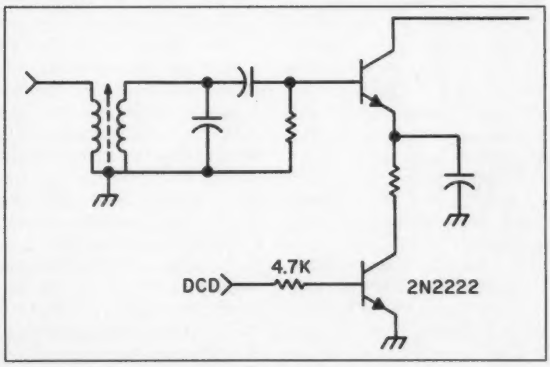

Figure 3.

Number 21 on your Feedback card

RTTY LOOP

Amateur Radio Teletype

Marc Leavey MD WA3AJR
Jenny Lane
Pikesville MD 21208

Teleprinter Machines

This month's RTTY Loop column takes a look at the models the Teletype Corporation produced. Although other companies, notably Kleinschmidt, have produced teleprinter machines, those from the Teletype Corporation have the widest circulation in the amateur RTTY community.

Baudot/Murray Machines

First on the list is the Model 12. This ancient boat anchor allowed many an amateur to use RTTY in the early days. With six magnets in the typing unit, each requiring 300 mA of current, it generated more electrical noise rather than mechanical noise, (the latter still being considerable). This is a machine for masochists.

The Model 14 series are strip printers and tape punches.The tape versions of this series are commonly combined with the Model 15 into a Model 19. More on those in a paragraph or so.

The Model 15 is the "standard" if ever there was one. This machine comes immediately to mind when someone mentions "Teletype." This sturdy page printer runs on a 60-mA loop supply, and will stand up to use day in and day out, longer than an amateur will want to run it.

The Model 19 is equivalent to a Model 15 on a table with a Model 14 tape punch. (Who knows why it's not called the Model 29?) It's the forerunner of today's "ASR" (Automatic Send-Receive) sets. The Model 19 is still in service at many installations.

The Model 26 is a machine designed for light duty. This machine is remarkable for moving the paper past the type head, like a typewriter, rather than the other way around as most modern printers do. This is a transitional machine. It has an early daisy-wheel printing device. There aren't many of the Model 26s around any more.

The Model 28 was the first machine to break into the modern RTTY era. With multiple gears to run 60, 75, or 100 wpm, it was the window into high-speed RTTY. There are many of these babies still in use.

The Model 31A is a strip printer! This 20-pounder was designed for "portable" use, within the definition of portable in the late 1960s. I have not seen or known anyone who has this specimen.

The Model 32 is a modern five-level teleprinter, which may as well be the ultimate machine. It's the Baudot version of the Model 33, a familiar machine to the ASCII crowd.

ASCII Machines

The Model 33 is the standard in ASCII teleprinters. This modern teleprinter has many versions. Use the "Call Control Unit," which is on the right plate of the machine, as a key to learn what the machine is wired for.

The Model 35 is the ASCII version of the Model 28. Even though this is an ASCII machine, many of the internal parts are the same as the Model 28, and interchangeable. Note that although the selector magnets in the Model 35 have a rather high current demand (500 mA), an internal selector magnet driver takes care of the interfacing. The Model 35 tends to be the heavier-duty version of the Model 33.

Thanks to the people who offered information on various machines, especially Bob Roehrig K9EUI, R. Lee Hagan K4OZQ, Doug Reed, and Tom KA4RKT (via CompuServe).

WWV

I mentioned WWV two months ago and wondered if decoding the encoded information was possible. Well, Bob K9EUI also passes along the information that the National Bureau of Standards publishes a guide to the WWV time-code format. WWV and WWVH use the same format, and WWVB uses a somewhat different format. The WWV format is a one pulse per second code on a 100-Hz subcarrier. It's a binary format and it gives the minute, hour, and day of the year. The length of the burst of the subcarrier determines the binary value of each bit. Those interested in this information should write for *NBS Special Publication Number 432*, NBS Time and Frequency Dissemination Services. Send your request to the Time and Frequency Division, National Bureau of Standards, Boulder, Colorado 80302.

PC RTTY

Bill Kantz WD2AEV sent in a query via CompuServe. Bill has a copy of a RTTY program for PClones called BAUDOTC.EXE. He said that the docs with the program claim to have source code available, but he can't find it anywhere. He's looking around for information on RTTY for the PC.

Well, there are quite a few public domain programs for the PClones. One I have looked at is available on CompuServe's HamNet for downloading. RTTY.EXE was written by Perry Taylor WØSE, and T.L. Vinson WØNW. It seems to be a rather full-featured program, with selectable speeds, modes, disk access, and the like. Free for the taking and that may be hard to beat. The reader might make note also of WØKU, a net user, who also asked about PClone RTTY via the Delphi information system.

KB8BMN sent along a Delphi Mail message, wondering about slow scan programs for the CoCo. Well, the first one that comes to mind is Marty Goodman's famous WEFAX program. It's a transmitting version and is available on Delphi for downloading. This may be just the ticket for the ham who wants to try SSTV on a shoestring. Hardware solutions are around as well, of course, with the AEA PK-232 described here a while back, leads the pack. The cost of the AEA PK-232 may be more money than one is willing to plunk down to try something out.

CoCo Instructions

Several hams have received a copy of January's RTTY program for the CoCo on tape and have asked for more specific information on how to use the program. The tape will have two programs on it. First of all, there are three CSAVEs of RTTY.BAS. This is the driver program for the RTTY routines, and will be the program to run first to get the thing started. So, CLOAD RTTY into the computer, then CSAVE RTTY onto a new tape only once. Now, put the tape back in and CLOAD MAKERTTY. The MAKERTTY program is a BASIC program that will create a binary program, usually called RTTY.BIN. This is the "gut" of the program.

Therefore, after loading MAKERTTY, put the new tape back into the recorder, position it right after the RTTY.BAS program. Push the RECORD buttons and type RUN. The computer must know the amateur is working from a cassette. It will save RTTY.BIN right after the BASIC loader.

Now, rewind the new tape and turn the computer off for a few seconds to reset. Put the new tape in, press PLAY, and type CLOAD RTTY. When the BASIC program is loaded, RUN it, and the computer will load the binary routine and start the ball rolling. Okay? Is that clear enough? Let me know.

Odds and Ends

Jim W. Pook is a Canadian friend who would like to monitor RTTY on his Apple II-gs. We have covered Apple software before, and I have sent Jim a list of what I know about that software. But, with the enhanced capabilities of the II-gs, I would think that there should be some new and exciting programs on the market.

Manuals and books are the object of Robert E. Becker's search for RTTY information. On the market, the current information is precious and very little, besides what I've talked about here in the column. I like to think that RTTY Loop remains one of the most current sources of RTTY and ham-computer information. While there isn't a "book" of RTTY Loop columns, back issues are available from little old me. Send me a self-addressed, stamped envelope and I will send an index of this column dating back more than ten years.

Input from readers has been heavy this month, by mail and computer. Let me hear from you! Send letters to the above address, with a self-addressed, stamped envelope for personal replies, or Email via CompuServe (ppn 75036,2501) or Delphi (username MARCWA3AJR). I always look forward to hearing from the amateurs.

Some of the most exciting hardware and software items have tickled my interest lately, and they will show up here in RTTY Loop. Not only that, but as I write, the Greater Baltimore Hamboree and Computerfest is on the horizon with goodies galore to fill next month's column. How can that be missed?

Check that subscription label on the wrapper of *73* right now, before it gets thrown out, and make sure it hasn't run out. The last thing you want to do is miss next month's RTTY Loop! 73

ALL ELECTRONICS CORP.

★QUALITY PARTS — CALL OR WRITE FOR A FREE 52 PAGE CATALOG — ★DISCOUNT PRICES

WE HAVE OVER 4000 PARTS AVAILABLE!!

FULL WAVE BRIDGE RECTIFIERS

10 AMP 200 P.I.V.
5/8" SQUARE
CAT# FWB-1020
$1.00 each • 10 for $9.00

25 AMP RATING
1 1/8" SQUARE
metal epoxy filled case
200 P.I.V. $2.50 each
CAT# FWB-251
400 P.I.V. $3.00 each
CAT# FWB-254
600 P.I.V. $3.50 each

ITT PUSH BUTTON
ITT MDPL series. 3/4" X 1/2" gray rectangular key cap. S.P.S.T. N.O. Push to close.
RATED:
0.1amp switching,
0.25 amp carry current. P.C. mount
CAT# PB-8 65¢ each
10 for $6.00 • 100 for $50.00

10 AMP SOLID STATE RELAYS
ELECTROL# S2181
CONTROL:
Rated 5.5 to 10 Vdc
(will operate on 3-32 Vdc)
LOAD:
10 Amp @ 240 Vac
2 1/4" X 1 3/4" X 7/8"
CAT# SSRLY-10B
$9.50 each
10 for $8.50 each
QUANTITY DISCOUNT!
25 for $7.00 each
50 for $6.00 each
100 for $5.00 each

XENON FLASH TUBES
3/4" long X 1/8" diameter
CAT# FLT-1 2 for $1.00

OPTO SENSORS
TRW# OPB815
U shaped opto emitter and sensor unit.
CAT# OSU-3
2 for $1.00
Clairex# CLI800W
U shaped unit with flange mount.
CAT# OSU-2
75¢ each

PHOTO RESISTOR ASSEMBLY
Center-tapped photo resistor mounted in plastic case (can be easily removed). 700 ohms light, 36K dark, 1/4" diameter.
CAT# PR-4 $1.00 each
10 for $8.50

STORES:
LOS ANGELES
905 S. VERMONT AVE.
LOS ANGELES, CA 90006
(213)380-8000

VAN NUYS
6228 SEPULVEDA BLVD.
VAN NUYS, CA 91411
(818)997-1806

MAIL ORDERS TO:
ALL ELECTRONICS
P.O. BOX 567
VAN NUYS, CA
91408
TELEX: TWX-6101010183
ALL ELECTRONICS
FOREIGN CUSTOMERS
SEND $1.00 POSTAGE FOR FREE CATALOG!!

TOLL FREE
800-826-5432
INFO: (818)904-0524
FAX: (818)781-2653
MINIMUM ORDER $10.00
QUANTITIES LIMITED
CALIF. ADD SALES TAX
USA: $5.00 SHIPPING
FOREIGN ORDERS INCLUDE SUFFICIENT SHIPPING.

CIRCLE 194 ON READER SERVICE CARD

CONTINUOUS COVERAGE ANTENNAS FOR COMMERCIAL & AMATEUR SERVICE

Model AC 1.8-30
1.8 to 30 MHz

- SWR Max 2:1, 1.4:1 average from 1.8 to 30 MHz
- Can be installed in approximately 80 ft. space
- Ideal for commercial services for multi frequency operation without the need for antenna tuners or additional antennas
- Handles 1 KW, 2 KW PEP ICAS
- Higher power models available on special order. Contact your dealer or factory

$175.00 SHIPPING & HANDLING ADD $4.00



U.S. Patent No. 4,511,898

Model AC 3.5-30
3.5 to 30 MHz

- SWR less than 2:1 from 3.5 to 30 MHz
- Complete assembled. Balun terminated with standard SO-239 connector
- Power capability 1 KW - 2 KW PEP ICAS. Higher power model is available on special order.
- Designed for 50 ohm feedline
- Weather proof balun and balancing network

$184.50 SHIPPING & HANDLING ADD $4.00



U.S. Patent No. 4,423,423

ALL OUR PRODUCTS MADE IN USA

BARKER & WILLIAMSON
Quality Communication Products Since 1932
At your Distributors. Write or Call.
10 Canal Street, Bristol, PA 19007
(215) 788-5581

CIRCLE 53 ON READER SERVICE CARD

Aries-1
Amateur Radio integrated Entry System

ID($ta): IK1ABC Name:Enrico City:Genoa State:Italy
Date: 03-10-88 Begin: 20:56 End QSO: Freq: 14.085 J
Type (mode): FSK My RST: His RST: Power: QSL:R
Remarks: Enjoys Sailing and fishing on his 30' boat 'TOMAR'
Data: 2) 10-31-87 / 17:27 to 17:48 / USB / 21.215.0 / RST 55 / His 57
Status: [I/R] [CLS] RTTY 45 Baud Normal [CLD] [Sr/F] [Qu/eX]
Log of:MY2I
CQ CQ CQ DE IK1ABC IK1ABC
KKK
IK1ABC DE MY2I MY2I
MY2I DE IK1ABC. TNX FER CALL OM UR RST 579 -- HW CPY? BK
IK1ABC DE MY2I
FB ENRICO UR RST ALSO 579 FROM GENOA -- I SEE FROM MY LOG THAT WE HAVE WORKED TWICE BEFORE, THE LAST TIME ON 15 METER SSB -- HAVE YOU BEEN OUT SAILING ON THE TOMAR LATELY? BY THE WAY I SEE THAT I HAVE RECD UR QSL CARD TNX -- HW IS THE PRINT?
IK1ABC DE MY2I MY2I KN
SAILING ON THE TOMAR LATELY? BY THE WAY I SEE THAT I HAVE RECD UR QSL CARD TNX -- HW IS THE PRINT?
IK1ABC DE MY2I MY2I KN
Hlp/Recall/Text 1Brext 2Call 3Exp 4Msg 5Prn 6Time 7On/Off 8Clear 9 Log 10 Coins
Input / Output from RTTY, CW AMTOR, Packet Controller (TNC)
Log Data
TNC / XCVR Status
Type Ahead Bfr
Function Keys

FOR IBM PC/XT/AT PS/2 & COMPATIBLES - $89.95 -

Aries-1...

- ... inserts Date, Time, Frequency and Mode Automatically into Log*
- ... supports Kantronics KAM, and AEA PK-232 All Mode Controllers*
- ... works with a MOUSE (also Function Keys) for fast and easy control
- ... SEARCHES / PRINTS Logbook data-base by Call, Prefix, Country, Frequency, Date, Time, etc.
- ... allows simultaneous use of Electronic Logbook (data entry/search) while using / reading data from Transceiver and All Mode Units.
- ... Automatically searches Logbook as soon as call is entered for duplicate. If duplicate is found, Computer beeps and the last previous information is filled in where appropriate (Name, City, State/Country and Remarks). Other data including number of times worked, dates, time on/off, mode, frequency used, signal exchange and remarks for each occurence is also shown in the Log area.
- ... was developed by a company which has been delivering professional software for Microcomputers since 1979.
- ... does much much more (Requires appropriate Serial Ports and Interfaces)*

ashton ITC
PO Box 1067 - Vestal, NY 13851 - (607-748-9028)

CIRCLE 338 ON READER SERVICE CARD

CIE Cleveland Institute of Electronics
Accredited Member National Home Study Council

CIE is the world's largest independent study electronics school. We offer ten courses covering basic electronics to advanced digital and microprocessor technology. An Associate in Applied Science in Electronics Engineering Technology is also offered.

Study at home — no classes. Programs accredited and eligible for VA benefits.

CIE Cleveland Institute of Electronics
1776 East 17th St., Cleveland, Ohio 44114

YES! I want to get started. Send me my CIE school catalog including details about the Associate Degree program.

Print Name _____
Address _____ Apt. _____
City _____ State _____ Zip _____
Age _____ Area Code/Phone No. _____
Check box for G.I. Bulletin on Educational Benefits
☐ Veteran ☐ Active Duty MAIL TODAY!

AAR90

CIRCLE 157 ON READER SERVICE CARD

ABOVE AND BEYOND

VHF and UHF Operation

Pete Putman KT2B
3353 Fieldstone Dr.
Doylestown PA 18901

TX MIXER BOARD FOR LMW 2304

Last month's column covered the Universal Local Oscillator (ULO), Receive Mixer, and IF Amplifier sections of the LMW 2304-MHz transverter kit. This column details the Transmit Mixer board construction, as well as the completed chassis and on-air performance.

Overview

Figure 1 shows the the transmit mixer board. This is the most intricate stage to assemble and perhaps the trickiest to align! The somewhat obscure pictorial diagram doesn't help matters. The schematic is correct and the final word on parts placement.

The design is quite simple. 144-MHz drive is injected through a large resistive pad that allows up to a 10-watt signal level. A 100Ω potentiometer adjusts the saturated drive. This output is connected to a diode mixer stage. A pair of HP2835 diodes function as a ring mixer stage, but there is not a lot of conversion gain. Due to this, the 144-MHz drive needed for saturated output is typically 1–2 watts. This level is easily obtainable.

The ULO board has more than adequate output at 1080 MHz (see last month), delivering between 40 and 50 mW across 50Ω. This signal is injected into TR1, an NEC 85637 bipolar device functioning as a doubler stage. Gain is about 3–4 dB and the output at 2160 MHz is fed to the ring mixer stage. Tuning here is critical, both to suppress the unwanted 2160-MHz LO signal and peak the desired 2304-MHz mixer product.

This stage is followed by five Class-A stages that run straight through at 2304 MHz and develop about 4–5 dB each. TR2 to TR5 are also NEC 85637 bipolar devices. TR6 is a Phillips BLU98 stage that develops 400–500 mW output maximum. All stages except TR6 run at 8 volts derived from a regulated bus line. TR6 is a more conventional 14-volt stage, and takes its power directly from the 13.8-volt input.

Construction

The assembly is quite tricky—check work often against the schematic. Of all the pictorial diagrams in the kit, this is by far the hardest to read. The importer, Bill Olsen of Down East Microwave, plans to have some of diagrams redrawn to alleviate this problem.

Perhaps the trickiest area of the board are around the driver and final stages. Here, the builder must carefully solder coils, resistors and diodes in a tiny area. For example, the pictorial does not show a 47Ω ¼W resistor from the base of TR5 to its associated choke, but the schematic does. Furthermore, placing the resistor with minimum lead length and attaching the choke (1 turn of wire with 4mm inside diameter) presents quite a challenge! I cut the leads down so far they were virtually non-existent and stood the resistor on end, making the shortest possible connection to the choke.

Also make sure to solder ALL the plated-through holes around the PC board, especially at the ground end of each etched inductor. I missed a few the first time, which adversely affected the unit's performance. LMW supplies strings of tiny pins to push through the holes and solder. They often don't fit without extra drilling, so use cut-off leads from components instead. Form these into a tight "U" shape and insert them into the board. After soldering, clip the leads flush to the board.

The trimmers are also tricky. The tiny leads at the head of the trimmer need to pass through the PC board to solder on the backplane. Pull them as tight as possible while holding the trimmer flush to the top of the PC board, and apply solder to make a smooth flux. Clip the excess leads as close to the board as possible. The trimmer bodies are made of a gold alloy and solder quite easily to the circuit traces. Use a low-wattage iron (40 watts is plenty) and tin them slightly before fluxing the solder to the trimmer body.

There are plenty of small chip capacitors—cautiously solder them to the designated points. These devices are susceptible to high heat, so just lightly flux solder over the ends. DON'T APPLY HEAT DIRECTLY FROM THE SOLDERING IRON!! There are only enough chips to make the kit work. Replacements have to be ordered from Down East.

Install the transistors last. LMW instructs the builder to pass the emitter leads for TR1–TR3 through the mounting holes and solder them to the backplane for the lowest impedance ground. Since the holes aren't large enough, enlarge them with a hand drill.

TR4, TR5 and TR6 solder entirely to the top of the board. (I mistakenly soldered the emitter leads from TR4 to the backplane, but it had no apparent adverse effect.)

Create the regulated 8-volt bus by strapping #22 wire between each of the insulated feedthrough capacitors. Again, enlarge the too-narrow holes with a hand drill. Install the feedthroughs with the solder flange on the backplane side and flux each flange completely to make a well-grounded and mechanically secure connection. I used uninsulated wire for the bus, but any type will suffice.

The DC voltage regulator mounts to the backplane. Apply a small coating of silicon grease (not included) since the regulator gets plenty warm during use! Bend the leads carefully to make sure the flange lines up with the screw hole punched in the board, and fasten securely. The DC relay fits nicely into its pre-drilled holes.

The remaining components are easy to install. Most of them go on the top of the PC board. Cut the leads as short as possible to keep a low profile when installing the diode bias networks. Watch the resistor markings! I mistakenly installed 100Ω types where 10Ω resistors were called for and vice-versa. This made things quite exciting on initial power-up.

Tune-up

First make sure the 8-volt bus functions correctly. Do this before connecting any of the collectors from TR1 through TR5.

Next, determine the operating bias. Monitor the collector current of each device with a milliammeter when testing the resistors marked "SOT." I found a value of 390–470Ω yields the desired collector current on each stage. The range is not critical. If the manual specifies 10–12mA, for example, anywhere from 8 to 15mA will do.

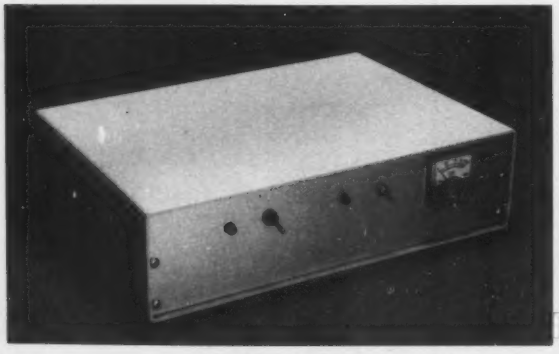

Photo A. The completed 13cm transverter.

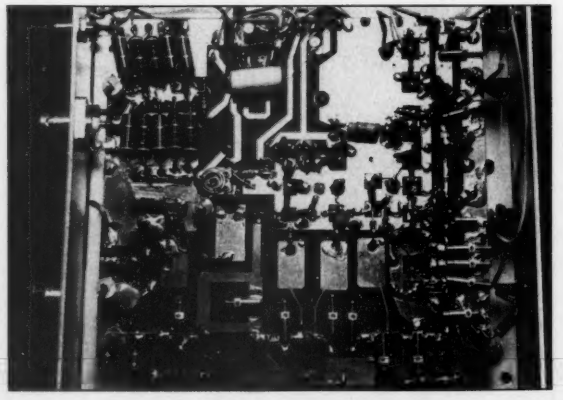

Photo B. Interior view of the transverter.

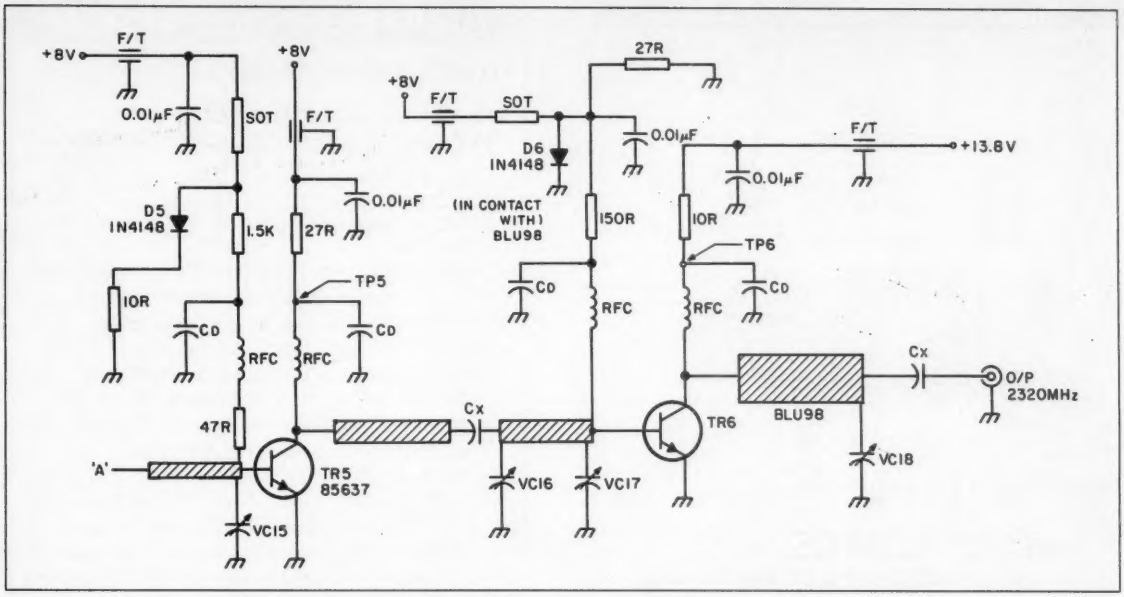

Figure 1. The schematic for the LMW 2304 13cm transverter TX mixer board.

Once the bias has been established for each stage, set up the ring mixer. This is a tough job without a spectrum analyzer or RF probe! Dave Mascaro WA3JUF checked out mine with a analyzer probe, which he also used to roughly align all the gain stages. A spectrum analyzer, however, isn't a must. The builder can still peak up the mixer and gain stages by using an RF probe or absorption wavemeter, both of which are readily found as surplus.

Set the trimmers on TR1 for maximum output by following the pictorial and checking with a probe. Next, connect the probe to each stage and adjust for maximum output while monitoring collector current. Each stage should have output peaks at minimum current values. Distinguish between the LO output and 2304-MHz composite signal by momentarily cutting the 144-MHz drive. The output should drop off completely. If this does not occur, the LO output has been peaked instead of the 2304-MHz signal. In this case, retune the ring mixer. If the output does drop off, the correct signal is present. Continue alignment as before.

Use a good 50Ω load to tune TR6 and carefully monitor collector current. Although the manual claims that 100mA will be the peak value, the stage can go into oscillation and considerably exceed that value! The final alignment of my unit yielded 65–75mA with the drive saturated. I used a Boonton 92 with 2W 50Ω load—not very accurate at 2304, but 50Ω nonetheless.

Use the above scheme to tweak the ring mixer and suppress the 2160-MHz LO signal. Apply power to the board and increase the Boonton 92's sensitivity until a signal is present. This is the LO signal. When I readjusted the trimmers, it dropped almost 10 dB, after which 144 MHz was re-injected and TR2 repeaked. The manual claims 35 dB of LO rejection at 500mW output. With 300mW output, there was an adequate 40 dB of rejection.

Final Assembly

The truly fun part is stuffing everything into a chassis! LMW makes a nice housing for the kit that allows space for the accessory 2-watt amplifier. Photo A shows the completed unit with front panel controls for POWER and TRANSMIT. Red and green lamps respectively indicate the status of these switches. A small Calectro milliammeter monitors final collector current and also displays relative output when the final board is installed.

There are separate connectors for 2304 RX in, 2304 TX out, 144 TR, and DC control and power. I chose the standard 5-pin chassis connector used by Microwave Modules. It's easily found in parts stores and the connectors are quite reliable. A surplus Teledyne relay with SMA connectors takes care of antenna switching, but the Tohtsu 500-series relays[1] with N connectors are probably better choices. These use 13.8 volts instead of the 28 volts needed for the Teledyne.[1]

Operation

The completed transverter was barely ready for the January VHF Sweepstakes. With the barefoot 300mW output into a Down East Microwave 45-element loop yagi atop my roof tower, I gathered 11 contacts in 2 grid squares–not bad at all! N2SB in southern New Jersey, a 40-mile path away, was my most distant contact. Most contacts were on CW, with a scattering on SSB.

Conclusions

The LMW 2304 Transverter kit is an inexpensive way to get a signal on 13 centimeters, but I don't recommend it for the inexperienced builder. Those who know their way around microwave circuitry, however, should find it a snap to assemble and align. All of the boards, especially the ULO, are well engineered. The importer quickly corrected, at no cost, the problem of missing parts and obscure documentation.

The feeling of working that first contact on 2304 after building the kit is unmatched! Those who want to take a plunge on 13cm should give this LMW kit a try.[2] 73

---

[1]Tohtsu 500-series relays are available from Transverters Unlimited, PO Box 6286, Station A, Toronto, ONT Canada M5W 1P3, (416) 759-5562.

[2]LMW Transverters are available as kits or assembled from Down East Microwave, Box 2310 RD #1, Troy ME 04987, (207) 948-3741.

CREATE
Creative Design Co., Ltd.
ROOF TOWERS!
A size to fit your needs
CR18 6 ft. $139.00
CR30 10 ft. $239.00
CR45 15 ft. $349.00
BEARING $ 39.00
(prices do not include shipping)
10 FT CR-30 ILLUST.
1-800-255-7020
CA 818 888-4927
Constructed of high quality aluminum with galvinized steel bracing supports. Over 20 sq. ft. of antennas! Guying is required.
ORION HI-TECH
P.O. Box 8771,
Calabasas, CA.
91302
CIRCLE 167 ON READER SERVICE CARD

ORDER TOLL FREE (800)426-2820



AEA
10 METER
OR
6 METER
DX HANDY

AEA PK 232
Your Choice $278.88

HAMTRONICS, INC.
4033 BROWNSVILLE ROAD
TREVOSE, PA. 19047
(215) 357-1400
Hours M,T,W - 9-6 Th - F 9-8 Sat. - 9-3

OVER 30 YEARS

Authorized Sales & Service --- Yaesu ▪ Kenwood ▪ Icom

CIRCLE 309 ON READER SERVICE CARD

AMATEUR TELEVISION

HAMS SHOULD BE SEEN
AS WELL AS HEARD!

TVC-4G 70cm ATV
Downconverter
Now only $99
Delivered UPS surface
in cont. USA

- See live action color & sound like broadcast TV
- Many areas have ATV Repeaters (call us or see the 87/88 ARRL Repeater Directory pg. 328 for your area)
- Most ATVers use home cameras and VCRs to show the shack, projects, home video tapes, public service events like parades, races, etc.
- Some repeaters also have weather radar, Space Shuttle video, BBS, & computer video

It's easy to start watching: 70cm antenna, a TVC-4G and any TV set tuned to ch2, 3 or 4. Our TVC-4G tunes the whole 420-450 mHz band & includes GaAsfet preamp & mixer, AC/12vdc wall plug, attractive shielded 4x2.5x7 cabinet. We also have wired & tested boards for the builder starting at $39. See ARRL Hbk chapter 20. When you are ready to try transmitting, we have transmitters, transceivers, antennas, and all your ATV needs for the 70, 33 & 23cm bands.

Hams, Call or Write for our full catalog of ATV gear!

(818) 447-4565 m-f 8am-5:30pm pst.

P.C. ELECTRONICS
2522 Paxson Ln Arcadia CA 91000

Tom (W6ORG)
Maryann (WB6YSS)

Special

OUTSTANDING PRICES ON IBM XT™ * COMPATIBLE SYSTEMS!

SYSTEM #1 $299.00
MOTHERBOARD WITH BIOS AND ZERO K OF RAM UPGRADABLE TO A FULL 640 K RAM. FLIP TOP CASE. XT/AT LOOK ALIKE KEYBOARD. 150 WATT POWER SUPPLY WITH ALL THE POWER NEEDED TO RUN EXTRA DRIVES AND CARDS.

(™) * IBM IS A REGISTERED TRADEMARK OF INTERNATIONAL BUSINESS MACHINES CORP.

Seagate ST-225, 20 MHz hard drive with control card available with any system for $319.00. Offer good thru 2/29/88. Call for customized systems.

SYSTEM #2 $499.00
MOTHERBOARD WITH BIOS AND ZERO K of RAM UPGRADABLE TO A FULL 640K OF RAM. FLIP TOP CASE. XT/AT LOOK ALIKE KEYBOARD. 150 WATT POWER SUPPLY. DUAL DISK DRIVE CARD WITH CABLES. ONE FLOPPY DRIVE DS DD 360K. A COLOR GRAPHICS CARD WITH RGB AND COMPOSITE OUTPUT. (ALL YOU NEED IS A MONITOR)

SYSTEM #3 $799.00
MOTHERBOARD WITH BIOS CONTAINING 256K OF RAM UPGRADABLE TO A FULL 640K OF RAM. FLIP TOP CASE. XT/AT LOOK ALIKE KEYBOARD. 150 WATT POWER SUPPLY. COLOR GRAPHICS CARD WITH RGB AND COMPOSITE OUTPUTS. MULTI I/O CARD WITH TWO DISK DRIVE PORTS, ONE PARALLEL PORT, ONE SERIAL PORT AND ONE SERIAL PORT OPTION, ONE GAME PORT, CLOCK AND CALENDAR WITH BATTERY BACKUP. TWO FLOPPY DISK DRIVES DS DD 360K AND A COMPOSITE MONITOR.

SHIPPING INFORMATION: PLEASE INCLUDE 10% OF ORDER FOR SHIPPING AND HANDLING CHARGES (MINIMUM $2.50, MAXIMUM $10). CANADIAN ORDERS, ADD $7.50 IN US FUNDS, MICHIGAN RESIDENTS ADD 4% SALES TAX. FOR FREE FLYER, SEND 22¢ STAMP OR SASE.

HAL-TRONIX, INC.
P.O. BOX 1101 DEPT. N
12671 DIX-TOLEDO HWY
SOUTHGATE, MICH. 48195 PHONE (313) 281-7773

DEALER FOR TEN-TEC & MFJ
HOURS: 12:00-6:00 EST Mon-Sat

"HAL"
HAROLD C. NOWLAND
W8ZXH

CIRCLE 175 ON READER SERVICE CARD

A DOLLAR AND A QUARTER DOESNT GO VERY FAR THESE DAYS.....

BUT A MAXCOM® GOES AROUND THE WORLD !!!

Absolutely no tuning with a MAXCOM system. Simply connect, dial your frequency and talk... That's it, just TALK.

OVER 4000 MAXCOM® STATIONS WORLD WIDE
BOX 502, FT. LAUD., FL 33302 305-527-5172

® MAXCOM is a registered trademark and is owned by Maxcom Electronics, Inc.
THE BOTTOM LINE: "MAXCOM WORKS"

CIRCLE 101 ON READER SERVICE CARD

QRP

Low Power Operation

Mike Bryce WB8VGE
2225 Mayflower NW
Massillon OH 44646

Packet QRP

Last month's column looked at some of the digital modes of communications QRPers have at their fingertips. This month's column finishes up digital QRP with packet radio before moving on the phone operation.

Packet radio is so far most at home on the two meter FM band. HF packet is not reliable enough for most people's tastes. I use a TNC (terminal node controller) and a two meter FM transceiver running at two watts output. By using the built-in digipeating capability of the TNC, a packeteer can communicate across the state using QRP power levels. Small portable packet stations will soon become the mainstay of communications during emergencies. Solar energy can power light-weight computers and TNCs. Packet is still quite new, but there are many good books out on the subject, such as *The Digital Novice* by Jim Grubbs K9EI and The *Packet Radio Handbook* by Jonathan Mayo KR3T. Also check out the PacketTalk column in this magazine.

Phone QRP

As much fun as the digital modes can be, they almost always require an interface between operator and radio. Phone operation requires much less—just the rig and the mike! That of course rules out the Heath HW-8 and the HW-9. Ten-Tec's Argosy and Argonaut are super on Single Side Band (SSB), but there are also many other fine SSB radios on the market.

SSB

Working SSB while running QRP can be most interesting. You can find other QRPers running phone on the 3985, 7285, 14285, 21385, and 28885 kHz. There is a move within the Board of Directors of the QRP ARCI for a QRP calling frequency for the Novice ten meter phone bands. When the board settles on a frequency, I'll list it here.

Most important in phone operation is clear, articulate speech. Don't talk very fast. Adjust the audio/mike gain for the best sounding audio. An oscilloscope takes all the guesswork out of setting the controls for the best audio.

Calling CQ while using SSB on QRP is usually a waste of time. Tail-ending a QSO produces far better results. This is the method I use with very good results. Don't forget to check out the other bands. Many times you can find 15 meters open and the DX running but with few stations working the band. Don't overlook the Novice phone band. Ten meters can support some really fine DX openings without the need of QRO (high power).

AM

This is perhaps the oldest form of voice communication. AM phone had its heyday in the early years of ham radio until the 1950s, when SSB came into use. AM is now experiencing a resurgence, however, especially for local to medium distance ragchewing, because of the much more pleasant and realistic sound than one hears on SSB.

Many of the older radios support AM. QRPers who can get their hands on a old Viking, Johnson, Elmac, or Heath DX-100, will be on AM phone with style. Some of the newer, high-tech imports also have AM operation, but they just don't have the punch of the old plate-modulated rigs.

It's true that AM is a high-power mode. There aren't many AM QRPers. There was a lot of AM on the ten meter band several years ago with the use of converted CB radios, and this can happen again with the increasing solar flux. The reader can buy back issues of *73 Magazine* that contain modifications for many different types of CB radios. Amateur radio, however, really needs a good band plan for AM operation on the ten meter band.

It should be possible to amplitude modulate an HW-8 by modulating the PA transistor. Any QRPers want to try? It would be an interesting experiment! A solid state low-level modulator should not be hard to build. Prospective AMers looking for more info can drop a letter to S.P.A.M. (Society for Promotion of AM) F. A. Dunlap, 14113 Stoneshire, Houston, TX, 77060. Send an SASE.

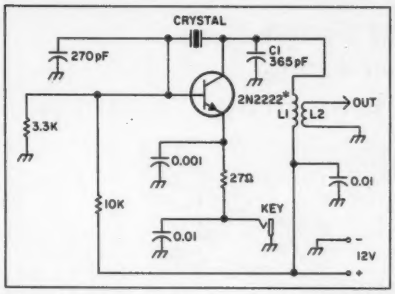

Figure 1. An easy-to-build rig that runs about 500mW input. A perfect project for a rainy day.

PJ0M

DX chasers should keep an eye out for this call. An expedition to Saba Island, manned by 6M DX Society members Mario Karcich WB2CZB, Jim Holt N3AHI, and John Laing W1EXC, has been finalized for 7–14 July 1988. Operation will be on all bands, 80 through 6, SSB and CW will be used. Particular attention will be paid to QRP operators. WB2CZB will be actively soliciting QRP contacts. QSL via Mario K2MUB. (SASEs, please!)

Field Day?

Those not looking for DX may be too busy getting getting ready for Field Day. This column would've focussed on this event, but no one responded to my call for Field day items!

Field Event station W8NP did something different last year. A computer logging system kept track of contacts. That setup proved itself so well that we're going to use it again this year. Forrest Hudspeth WA3FAE wrote it and called it "TestLog." The program is in Microsoft Quick Basic™ and runs on a IBM computer or clone. It has very, very fast dupe checking, error trapping, and error correcting ability. VHF grid collectors can also use this program. The program will hold more than 2000 calls per band!

After going home from Field Day, the contester can load the program up on the home computer and batch-print the entire contest while he bags some much needed sleep.

Interested readers can get a copy of the program directly from Forrest for $20. This price includes all the printer routines and all the docs with which to run the program. This could well be the best $20 a contester ever spent. Drop Forrest a letter at 5883 Woodbine Road, Woodbine, MD, or leave a message on Compuserve (#ID 72126,1173)

More Program Listings

Propagation master Bob Brown NM7M put together the "QRPers Basic Propagation Tool Kit." This is a handbook of propagation hints alone with several small basic computer programs listings. Each program can stand alone, or link together to become a rather slick propagation program. The programs are written in generic Microsoft basic, executable on almost any personal computer.

The tool kit contains 45 pages of text and comes in a 6 x 9 inch book. Copies are available from the QRP Candy Store, Bob Spidell W6SKQ, 45020 N. Camolin Ave., Lancaster, CA, 93534.

Ask for a flyer. The Candy store sells many QRP goodies. (Don't forget the SASE.)

"Milliwatting"

Here's the awaited milliwatt rig. Jim WB2NGN sent this in to me, saying the source was likely from an issue of *73* from some years back. It runs about 500 milliwatts input, and is a very easy "rainy-day afternoon" project to build and get running.

Although the schematic does not show what frequency the transmitter covers, I'd say 40 meters. L1 is 17 turns #24 wire 1¼ inch diameter. L2 is 3 turns link. C1 is adjusted for the best sounding CW tone and best keying. The transistor can take up to 50 mA, so it's best to heatsink it. Also, I have found that the metal 2N2222 gives a bit more bite than the plastic versions. Since the transistor keys on and off by grounding the emitter, use a low resistive keying device. A straight key is fine. An electronic-keyer driven reed relay is also OK.

There is no PC board for this project. Use perf-board or make the small PC board.

The term "milliwatting" is starting to replace the awkward-sounding phrase "QRPp." Running less than half a watt really makes the hair thin. This requires the absolute best antenna system possible, operating style, and every trick in the book, will be needed to catch a QSO.

One last word for those milliwatters out there: "Success grows from the soil of despair!" 73

Factory-less, jumper-less, ROM-less programming.

With the new **S-COM 5K** Repeater Controller, you'll be able to configure your repeater remotely — using DTMF commands. Only the **5K** offers this capability for just $189, wired and tested.

- Easy to interface
- Polite ID'er
- Nonvolatile Memory
- Needs only 55 mA/12 V
- Adjustable Audio
- CMOS Microprocessor
- DTMF Muting
- Control Receiver Port
- 65 control commands
- Programmable Command Strings
- Optional Audio Delay
- Optional Rack Cabinet

S-COM Industries
P.O. Box 8921
Fort Collins, CO 80525
(303) 493-8316

CIRCLE 95 ON READER SERVICE CARD

DEALERS
Sell *73 Amateur Radio*

Selling *73 Amateur Radio* will make money for you. Consider the facts:

- If you carry *73 Amateur Radio* it will increase your store traffic—and our dealers tell us that *73* is the hottest selling amateur radio magazine on the newsstands today.
- Increased store traffic means increased sales for you. Hams will come into your store to pick up the latest *73* and end up buying the latest all-band, all-mode transceiver (or at least a few feet of coax).
- *73 Amateur Radio* guarantees each issue—you pay only for the copies that you sell. We pay for all shipping.

For information on selling *73 Amateur Radio*, call Peter Murphy at **800-722-7790**, or write to *73 Amateur Radio*, WGE Center, Peterborough, NH 03458.

73 Amateur Radio

WGE Center, Peterborough, NH 03458 800-722-7790

INTERFERENCE?

- ★ Interference Location
- ★ Stuck Microphones
- ★ Cable TV Leaks
- ★ Security Monitoring
- ★ VHF and UHF Coverage
- ★ Computer Interface
- ★ Speech Synthesizer
- ★ 12 VDC Operation

New Technology (patent pending) converts any VHF or UHF FM receiver into an advanced Doppler shift radio direction finder. Simply plug into receiver's antenna and external speaker jacks. Uses four omnidirectional antennas. Low noise, high sensitivity for weak signal detection. Call or write for full details and prices.

DOPPLER SYSTEMS, INC. P.O. Box 31819 Phoenix, AZ 85046 (602) 488-9755

CIRCLE 15 ON READER SERVICE CARD

Folded Broadbander
Unique folded design shortens and creates broad resonance in both bands. Length is 70' for FB 160/80 and 35' for FB 80/40. To order specify CW or SSB.
Info 56c S.A.S.E.
FB 80/40 $59.95 +$5 P&H
FB 160/80 $69.95 +$5 P&H

FB Slopers
- Fast Tower Mount
- Full Legal Power
- No Caps or Coils
- Never Corrodes
- Fully Insulated
- Ready to Use
- Coax Feed
- Tough

AntennasWest
1971 N Oak Lane 1300 E
Provo, UT 84604-2138
(801) 374-1084

CIRCLE 302 ON READER SERVICE CARD

HI-PERFORMANCE DIPOLES



ANTENNAS THAT WORK! CUSTOM ASSEMBLED TO YOUR CENTER FREQ. EX. BAND - ADVISE RTL OF CENTER AND EACH END - BAND AS INVERTED "V"- HORIZONTAL, VERT DIPOLE, SLOPING DIPOLE - COMMERCIAL QUALITY - STAINLESS HARDWARE - LEGAL POWER - NO-TRAP, HIGH-EFFICIENCY DESIGN. PERSONAL CHECK, MO, OR C.O.D. ($3)

HPD-5*	80-40-20-15-10M	MAX-PERFORMANCE DIPOLE 87' LONG..... $105ppd
HPD-2	80-40M	MAX-PERFORMANCE DIPOLE, 85'-LONG $82,...95'-$85ppd
HPD-3*	160-80-40M	HI-PERFORMANCE DIPOLE 113' LONG..... $79ppd
SSD-6*	160-80-40-20-15-10M	SPACE-SAVER DIPOLE 71' LONG..... $125ppd
SSD-5*	80-40-20-15-10M	SPACE-SAVER DIPOLE-SPECIFY L. 42'-$105, 52'-$108ppd
SSD-4*	80-40-20-15M	SPACE-SAVER DIPOLE-SPECIFY L. 46'-$ 93, 60'-$ 96ppd

*9-BANDS WITH WIDE-MATCHING-RANGE TUNER.

SASE FOR CATALOGUE OF 30 DIPOLES, SLOPERS, & SPACE-SAVING, UNIQUE ANTENNAS

W9INN ANTENNAS 312-394-3414
BOX 393 MT. PROSPECT, IL 60056

CIRCLE 38 ON READER SERVICE CARD

CABLE-TV SIGNAL ELIMINATOR

ELIMINATE A CHANNEL that you find unsuitable for family viewing, but is poorly scrambled by your cable company.

or

CLEAR UP A CHANNEL that presently contains severe interference, by ELIMINATING whatever signal is causing this.

NOTE: If picture and sound are equally affected, this IS interference and CAN be removed by our product. If only picture is affected, this usually IS NOT interference and CANNOT be removed by our product.



$30 each

30 DAY MONEY-BACK GUARANTEE

- All models in stock
- Fast, free shipping
- One year warranty
- Quantity discounts to 50%

TO ORDER, SEND CHECK OR MONEY ORDER TO:

STAR CIRCUITS - (DEPT. F)
P.O. BOX 8067
PEMBROKE PINES, FLORIDA 33084

WORKS ON CABLE TV OR BROADCAST TV
EXTERNAL ADJUSTMENTS ALLOW PRECISE TUNING TO ANY FREQUENCY REQUIRED
THREE MODELS AVAILABLE:
MODEL 26-Tunable to channels 2 thru 6 [54-108 Mhz]
MODEL 1422-Tunable to channels 14(A) thru 22(I) [120-174 Mhz]
MODEL 713-Tunable to channels 7 thru 13 [174-216 Mhz]

★★★★★ PRESENTING ★★★★★
CABLE TV DESCRAMBLERS
★★★★★ STARRING ★★★★★
JERROLD, HAMLIN, OAK
AND OTHER FAMOUS MANUFACTURERS

- FINEST WARRANTY PROGRAM AVAILABLE
- LOWEST RETAIL/WHOLESALE PRICES IN U.S.
- ORDERS SHIPPED FROM STOCK WITHIN 24 HOURS

FOR FREE CATALOG ONLY **1-800-345-8927**
FOR ALL INFORMATION **1-818-716-5914**

PACIFIC CABLE CO. INC.
7325½ RESEDA BLVD. DEPT 1816
RESEDA, CA 91335

CIRCLE 176 ON READER SERVICE CARD

UNCLE WAYNE'S BOOKSHELF

Aw right, a'ready! NOW, the popular electronics and amateur radio books you've been hounding poor old Uncle Wayne for are here! Now you can build up your hamshack library with these soft-cover favorites...



• The Packet Radio Handbook
by Jonathan L. Mayo KR3T
"...an excellent piece of work. Well-worth reading for both the experienced and the new packeteer...the definitive guide to amateur packet operation."
—Gwyn Reedy W1BEL **Only $14.95**

• The Beginner's Handbook of Amateur Radio—2nd Edition
by Clay Laster



Combines theory and practice in an easy-to-understand format, and provides information for choosing and installing radio receivers and transmitters, antennas, transmission lines, and test equipment. 400 pages, 291 illustrations **$16.95**



• DX Power: Effective Techniques for Radio Amateurs
by Eugene B. Tilton K5RSG
256 pages, 10 illustrations **$10.00**



• Secrets of Ham Radio DXing
from Dave Ingram K4TWJ
(Hard Cover only) 176 pages, 102 illustrations **$12.95**



• Transmitter Hunting: Radio Direction Finding Simplified
by Joseph D. Moell K0OV and Thomas N. Curlee WB6UZZ
336 pages, 248 illustrations **$17.95**

• The Practical Handbook of Amateur Radio FM & Repeaters
by Bill Pasternak WA6ITF with Mike Morris WA6ILQ, Technical Advisor 532 pages, 337 illustrations **Only $12.95**

• The Radio Amateur's Microwave Communications Handbook
by Dave Ingram K4TWJ
176 pages, 87 illustrations **$18.95**



• The Digital Novice
by Jim Grubbs K9EI
Your guide to the fascinating worlds of communication that have just opened for thousands of amateur radio operators. Now you can learn about everything from Morse code to the latest in packet radio technology. **$9.95**

• The Commodore Ham's Companion
by Jim Grubbs K9EI
160 pages of useful information on selecting a Commodore computer for the ham shack, where to find specialized programs, the Commodore-packet connection, and more! **$9.95**

• Master Handbook of 1001 Circuits—Solid-State Edition
by Kendall Webster Sessions
With this outstanding reference in hand, electronics hobbyists and professionals will never have to search for schematics again. Completely updated, the book is thoroughly indexed and all 1001 circuits are clearly illustrated. 420 pages. **$19.95 soft cover or $28.95 hard cover.**

Uncle Wayne's Bookshelf Order Form

☐ The Packet Radio Handbook	$14.95
☐ The Beginner's Handbook of Amateur Radio	$16.95
☐ DX Power: Effective Techniques for Radio Amateurs	$10.00
☐ Secrets of Ham Radio DXing	$12.95
☐ The Practical Handbook of Amateur Radio FM & Repeaters	$12.95
☐ Transmitter Hunting: Radio Direction Finding Simplified	$17.95
☐ The Radio Amateur's Microwave Communications Handbook	$18.95
☐ The Digital Novice	$9.95
☐ The Commodore Ham's Companion	$9.95
☐ Master Handbook of 1001 Circuits—Soft Cover	$19.95
Hard Cover	$28.95

Add $1.00 for postage & handling

Total Enclosed _____

Please Print!
Name _____ Call _____
Address _____
City _____ State _____ Zip _____
☐ AE ☐ MC ☐ VISA ☐ Check/Money Order
Card # _____ Exp. Date _____

Mail your order to *73* Magazine, WGE Center, Peterborough NH 03458
Attn: Uncle Wayne

WEATHERSATS

View On Video Processing

Dr. Ralph Taggart WB8DQT
602 S. Jefferson
Mason MI 48854

This month's column deals with quite literally the "big picture"—the whole earth to be precise. Following the US and Soviet polar orbiters is a way to get a very detailed view of the weather in the reader's part of the continent, but it falls far short of viewing the whole earth from space. The sat-chaser can greatly enhance that view by adding WEFAX capability to his station.

Worthwhile Investment

Although early WEFAX experiments involving image relay via geostationary satellites were begun in the early 70s using VHF transmissions, all current WEFAX activity is now conducted on 1691 MHz (plus 1694.5 MHz for the European METEOSAT spacecraft). This requires the addition of some S-band microwave hardware to the station. Since image transmission formats are similar to those used by the VHF polar orbiters, an S-band upgrade can be as simple as the addition of a small dish (typically 4 feet or 1.2 meters in diameter) and a downconverter to convert the 1691 MHz signal down to a standard VHF frequency (typically 137.50 MHz). The *Weather Satellite Handbook* (*WSH*) covers many of the hardware details. There are some very real advantages to having WEFAX capability:

(1) The U.S. GOES and European METEOSAT spacecraft are geostationary, so once the sat-chaser has the antenna aligned on a spacecraft within range, he simply locks it in place and forgets it!
(2) A wide variety of image products, including weather charts, mosaics (polar and mercator) of polar orbit imagery, and samples of GOES imagery, are available for viewing. Over 100 images are contained in the GOES central daily schedule.
(3) All images are transmitted on a fixed daily schedule, making it easy to plan the reception of particular pictures of interest.

The most interesting pictures for most experimenters are the images derived directly from the GOES spacecraft themselves. GOES East and GOES West scan

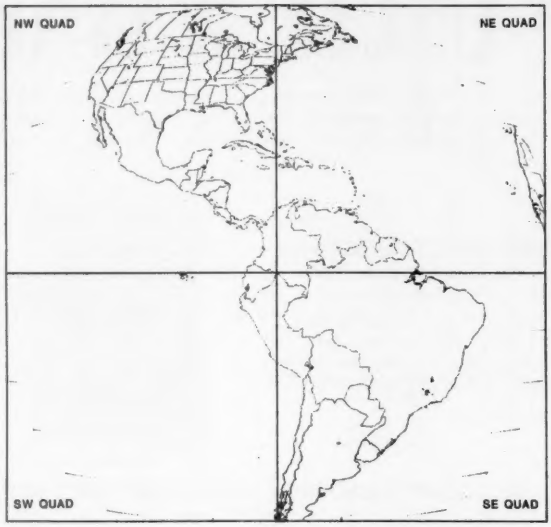

Figure 1. Diagram of the arrangement of WEFAX quads that make up the mosaic of the full earth disc as imaged by one of the GOES spacecraft. This particular diagram shows the coverage from GOES E and is reproduced from Clark, R.M. and E.W. Feigel. 1981. The WEFAX User's Guide. Nat. Earth Sat. Serv., NOAA, U.S. Dept. of Commerce.

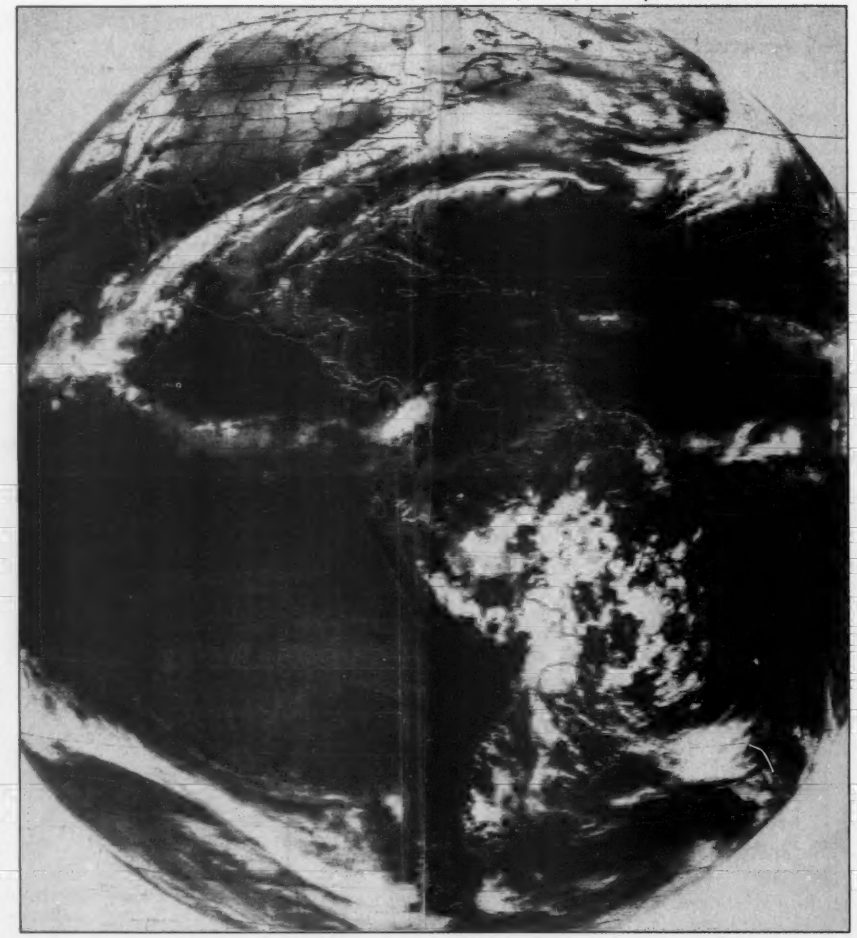

Figure 2. Manual assembly of prints of individual quads is the standard way to reconstruct the earth disc. This example shows an 1800Z IR image derived from GOES E and transmitted through GOES Central. Although this procedure is simple, it takes time, uses up four sheets of FAX paper, and the resulting image is too large for convenient storage! This image was prepared from four Smartfax prints from the scan converter video memory. Each quad represents 768 image lines, each line digitized to 1024 pixels. All of the examples shown here are late December (1987)/early January (1988) IR with plenty of nasty winter weather in northern North America.

WORLD'S SMALLEST——— ———WEATHER STATION

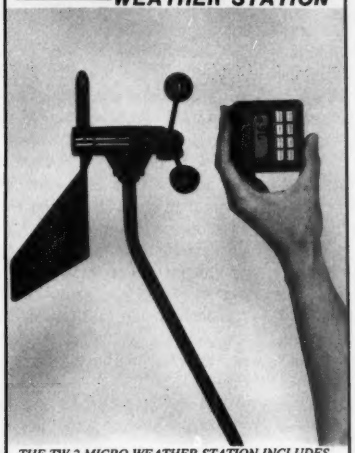

THE TW-2 MICRO WEATHER STATION INCLUDES A COMPUTER MODULE, THE AN-2 ANEMOMETER, AND 40' OF LEAD IN CABLE. FOR ONLY $169.95.

WIND SPEED	AUTO SCAN
WIND DIRECTION	METRIC / STANDARD
WIND CHILL	FOUR WAY POWER
WIND GUST RECORD	NICAD READY
TEMPERATURE	MOUNTING OPTIONS
HI/LOW TEMP RECORD	ONE YEAR WARRANTY

****SATISFACTION GUARANTEED****

MAGNAPHASE INDUSTRIES, INC.

MADE IN U.S.A. 1502 PIKE STREET N.W. AUBURN, WA 98001 M/C & VISA

ORDERS ONLY: 800-322-1502

INFORMATION: 206-735-0374 FAX: 206-735-9044

CIRCLE 336 ON READER SERVICE CARD

Radio equipment not included

Also Available . . . . .
Floor Space: 51" Wide by 30" Deep

. . . at last . . . your shack organized!

A beautiful piece of furniture – your XYL will love it!

$199.50 S-F RADIO DESK

Deluxe - Ready to Assemble

Designed with **angled** rear shelf for your viewing comfort and ease of operation.

FINISHES: Walnut or Teak Stain.

Floor Space: 39" Wide by 30" Deep

Additional Information on Request.

Checks, Money Orders, BankAmericard and Master Charge Accepted.

F.O.B. Culver City. (In Calif. Add 6% Sales Tax.)

DEALER INQUIRIES INVITED

$219.95

S-f Amateur Radio Services

4384 KEYSTONE AVENUE • CULVER CITY, CALIF. 90230 — PHONE (213) 837-4870

CIRCLE 73 ON READER SERVICE CARD

ATV CONVERTERS • HF LINEAR AMPLIFIERS

DISCOVER THE WORLD OF FAST SCAN TELEVISION

AMATEUR TELEVISION CONVERTERS

ATV2 420–450	$ 44.95 Kit
ATV3 420–450	$ 49.95 Kit
ATV4 902–928	$ 59.95 Kit

AUDIO SQUELCH CONTROL for ATV

SQ	$ 39.95 Kit

2 METER VHF AMPLIFIERS

35 Watt Model 335A	$ 79.95 Kit
75 Watt Model 875A	$119.95 Kit

Available in kit form or wired and tested.

HF AMPLIFIERS per MOTOROLA BULLETINS

Complete Parts List for HF Amplifiers Described in the MOTOROLA Bulletins.

AN758 – 300 Watts	EB63 – 140 Watts
AN762 – 140 Watts	EB27A – 300 Watts
AN779 – 25 Watts	EB104 – 600 Watts

POWER SPLITTERS and COMBINERS 2–30MHz

600 Watt	2–Port	$ 59.95
1200 Watt	4–Port	$ 69.95

BROADBAND TRANSFORMERS per MOTOROLA Engineering Bulletins

RF400–1 (2.0 uH @ 1.0MHz)	$ 3.95
RF600–1 (4.0 uH @ 1.0MHz)	$ 4.45
RF800–1 (4.2 uH @ 1.0MHz)	$ 4.95
RF1000–1 (8.0 uH @ 1.0MHz	$ 5.95

For detailed information and prices, call or write for our free catalog.

FERROXCUBE DEVICES

VK200–20/4B RF Choke	$ 1.20
56–590–65–3B Ferrite Bead	$ .20

HEAT SINK MATERIAL

Model 99 Heat Sink(6.5x12x1.6)	$ 20.00
CHS–6 Copper Spreader(6x6x1/4)	$ 20.00

Add $2.00 additional shipping.

We also stock Hard–to–Find parts

CHIP CAPACITORS
METALCLAD MICA CAPACITORS
SEMICONDUCTORS
RF POWER TRANSISTORS
RF CHOKES
MINI–CIRCUIT MIXERS

SBL–1	$ 6.50
SBL–1X	$ 7.95

ARCO TRIMMER CAPACITORS

Add $ 2.00 for shipping and handling.

VISA

CCI Communication Concepts Inc.

121 Brown Street • Dayton,Ohio 45402 • (513) 220–9677

master charge

CIRCLE 99 ON READER SERVICE CARD

Explore All The Fascinating Possibilities Of Packet Radio!

The number of packet stations in the U.S. has grown at an average rate of 2000% a year for the past five years. Find out why packet is the fastest growing mode of ham radio, and learn how you can become a packeteer!

The Packet Radio Handbook
by Jonathan L. Mayo KR3T

gives you a minicourse that includes:

- the development of packet radio
- how to combine packet with other areas of amateur radio in civil defense communications
- traffic handling
- modulation methods and networking principles
- the use of protocols, **AND MORE!**

You'll want to join the packet bandwagon after reading KR3T's fact-filled **Packet Radio Handbook!** Order your copy now!

THE PACKET RADIO HANDBOOK
$14.95

Please Print.
Name _____ Call _____
Address _____
City _____ State _____ Zip _____
☐ AE ☐ MC ☐ VISA ☐ Check/Money Order
Card # _____ Exp. Date _____

WEATHERFAX → PC

Receive & Transmit AM/FM Radio Faxcimile
View Satellite Image on Graphic Display
Zoom and Pan Around Image
Print to Epson (IBM) Compatible Printer
Works with Hercules, CGA, EGA Monitors
Plug In Board for IBM PC or Compatible

$599.00

COMPUMAX

26 W. Boylston St.
W. Boylston, MA 01583
(617) 835-2722

CIRCLE 80 ON READER SERVICE CARD

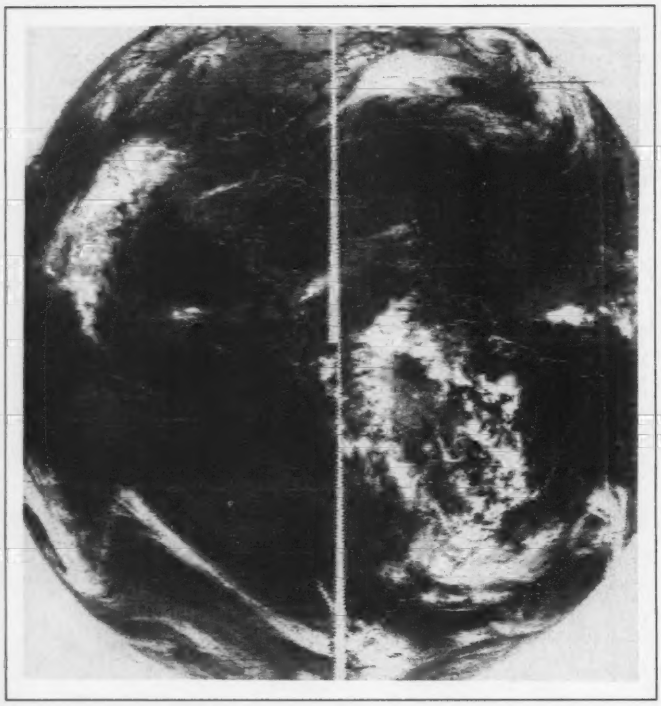

Figure 3. The first attempt at electronic assembly of the disc image. While the software routines worked just fine, a slight clock error prohibited merger of eastern and western quad pairs.

the entire earth disc every half hour and transmit the highly detailed, multispectral images back to earth in a wide band digital format. These digital signals are transmitted back through the originating spacecraft in a time stretched format to reduce the required bandwidth, but it requires quite a sophisticated ground station to receive, decode, and display these digital images. A number of dedicated experimenters have accomplished this formidable task, but such installations are still out of reach for most satellite hobbyists.

Good News

Fortunately, the images of the earth disk are available, at reduced resolution, via WEFAX transmissions through the primary imaging spacecraft and via GOES Central, which is dedicated entirely to WEFAX relays. The NOAA ground computers, which digest and format the detailed digital images, are also used to format the earth disc imagery for WEFAX transmission. The primary format involves breaking the earth disc up into four quadrants: NE, SE, NW, and SW (see Figure 1) which are transmitted in sequence.

The WEFAX format is quite easy to process. The *WSH* scan converter, for example, operates automatically in the WEFAX mode, displaying each picture as it comes in. This is a rather neat way to observe the many WEFAX images that are transmitted—just watch them instead of using up film or paper. The viewer inevitably gets the itch to put those four quadrants together to see what the entire earth looks like. To do so, he has to print each image quadrant (using a FAX printer) or photograph and print each one (if he is using a CRT display system). With hardcopy of the four quads in hand, the rest is just manual labor. Each quad overlaps its neighbor by just a small amount, so the four images can simply be overlapped slightly to reconstruct the earth disk image.

The whole process gets a bit tedious and time consuming, but the results are often spectacular, as shown in Figure 2. Aside from the time required to prepare the disc mosaic, there are a few other factors that interact to reduce the number of such pictures the viewer is likely to construct:

(1) He must print out each of the image quads. Each disc requires at least four sheets of FAX paper.

(2) Phasing must be very precise. If he loses a portion of one or more quads, a good match up may be impossible.

(3) The contrast for each of the quads must be identical. Tonal variations between quadrants detracts from the appeal of the image.

(4) The resulting images are quite large since they represent four normal prints. The *WSH* FAX recorder prints images that are approximately 7 inches square, so the final disc image will be almost 14 × 14 inches. This is fine for hanging on the wall, but the pictures are difficult to store, not to mention the bill for FAX paper!

The use of the scan converter eliminated some of the problems in that succeeding WEFAX images could be registered laterally with an error of less than 0.1% (under 1 pixel displacement error in a 1024 pixel line) and line registration is virtually perfect. At a given contrast setting, tonal variation from quad to quad is unnoticeable, provided the NOAA computers do their job properly!

Figure 4. A complete rewrite of the software to compensate for any reasonable clock errors resulted in an essentially perfect merge of the quads. In addition to being able to preview the disc image using the scan converter, hardcopy printouts now only require a single sheet of FAX paper and the print is easily filed away. Each quad in this image consists of 384 image lines, each digitized to 512 pixels, resulting in a total of 768 lines for the composite with 1024 pixels per line. This image is a Smartfax print directly from the scan converter video memory.

Smart Idea

The development of the simple Smartfax recorder (see WEATHERSAT for September and October 1987) made it quite easy to print pictures directly from the scan converter memory and that, in turn, made it a bit easier to prepare full-disc mosaics. In the case of Figure 2, the original quad transmissions were taped and each was automatically loaded in turn into the scan converter memory. A Smartfax print was made of each quad and then the prints were trimmed and fitted together to prepare the mosaic. It still took time and paper, the pictures were still too large to handle or store easily, and the taped junctions between quads were more visible than I really liked, but it was an improvement over direct FAX printing.

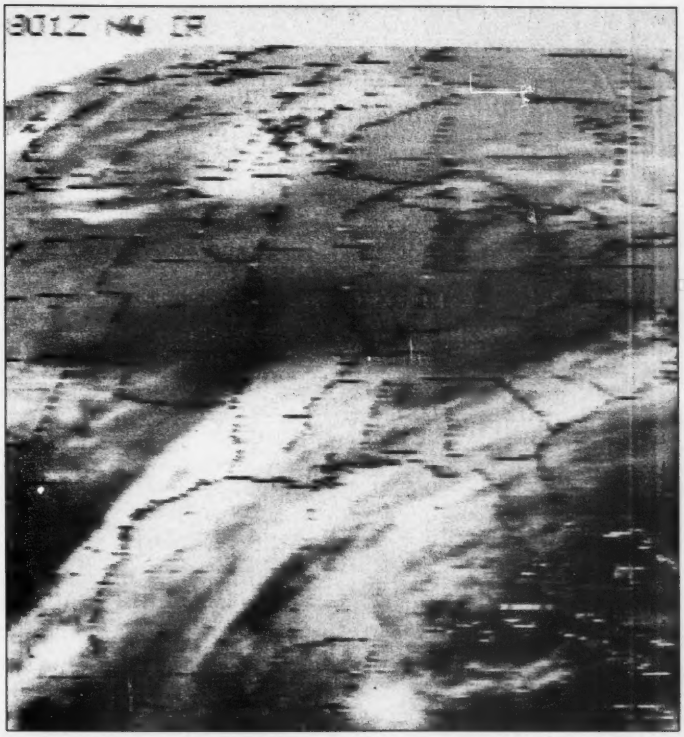

Figure 5. Although quad resolution must be reduced to fit the full disc into memory, resolution is still acceptable as shown by the Smartfax print of a high resolution zoom into the image memory. State boundaries are recognizable, cloud features are reasonably detailed, and the image even shows the waters of Lake Michigan to be warmer (darker) than the surrounding land surface. The area of this high resolution zoom represents about 1/16th of the total image area.

After printing out a number of disc mosaics in that way, despairing of rising paper costs, I considered letting the computer do the job using the scan converter. Normal scan converter operation involves sampling each line by 1024 pixels and loading 768 of these lines to the image memory (380K). If the sampling density were dropped to 512 pixels per line and each quad were limited to 384 lines (sampling every other line), each quad would occupy ¼ of the total image memory. In theory at least, if the quads were properly loaded to the correct part of the memory, the final image would consist of the proper arrangement of all four quads—basically the entire earth disc!

Having gotten that far, I decided to carry through and develop a new WEFAX mode to properly assemble the quads automatically. Setting the revised sampling rates was easy, as was the problem of proper placement in memory, but there were additional programming challenges I had not adequately anticipated.

Programming Hurdles

A child can do the manual preparation of mosaics, which involves the trimming off of extraneous border material from each print and fitting together the four quads. The computer, however, is an absolute dunce by comparison. The electronic trimming and fitting turned out to be a major programming task that required many hours of measuring and calculation of the limits of extraneous border and the horizontal and vertical overlap of quads, all in terms of pixel counts.

Figure 3 shows the first attempt at electronic quad assembly. The quads were all in the right place and the joining of northern and southern quads was fine, but the image showed those nasty white wedges between the eastern and western quads! The problem was a slight error in the master clock frequency, tilting each image just enough to make east-west merge impossible. Getting the clock *precisely* on frequency would solve the problem, but I chose to completely redo the programming so the quads could be merged even with noticeable clock errors.

"Holding the full disc at full resolution would require over 1.5MB of RAM!"

Perfection At Last

Since a lot of reprogramming was necessary in any case, I decided to refine the software to completely eliminate the border material and place the disk on a blank background for the most pleasing appearance. The final result of this programming effort is shown in Figure 4 and features a virtually perfect merge of the four quads.

In addition to the convenience of being able to view the whole disc on the TV monitor, the image can be printed via Smartfax using just a single sheet of paper! While manual assembly of a disc almost always requires the use of tape recordings of the quad transmissions, this is not true of the software assembly. It works so well that I can set up the station system to input the sequence of quads into the scan converter directly from the receiver so that the 1800Z earth disc can be waiting for me when I get home!

The only disadvantage is that one has to reduce the effective resolution of each quad in order to fit all four into the 380K video memory. Holding the full disc at full resolution would require over 1.5MB of RAM! The reduced resolution, while noticeable, is not really too serious, balanced against the spectacular view. Figure 5 is a Smartfax print of a high resolution zoom into the disc image. While bro- ken up a bit, all the state boundaries are still recognizable and cloud features adequately detailed. Those hams who want to look at the whole world's weather should try upgrading to WEFAX! 73

References

References to the *WSH* refer to the Third Edition of the *Weather Satellite Handbook*, available from the columnist for $15. Outside of the US, please include an additional $1 for postage.

Ed note: We encourage the exchange of weathersat ideas and software on the 73 BBS. Call 603-525-4438 (300/1200 baud) and sign on.

Number 25 on your Feedback card

CIRCUITS

Great Ideas From Our Readers

Have a quick'n'easy circuit idea? Share it and get a one year subscription or extension to *73*! Clearly mark all entries as submissions for Circuits to distinguish them from manuscripts. Send your entries to Circuits, 73 Magazine, Peterborough, NH 03458.

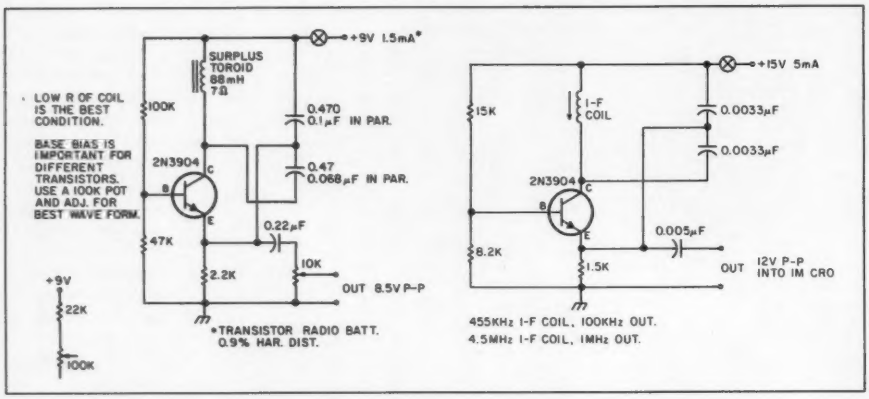

SIMPLE OSCILLATOR CIRCUIT

It occurred to me that some of my fellow hams might be interested in a simple oscillator circuit that I have used for years.

Almost any NPN transistor will work, but the base bias should be varied for each transistor. Characteristics vary a great deal. Also the lower the resistance of the inductance, the better the circuit will work. If the resistance is too high, the circuit will not oscillate.

The figures show the versatility of the circuit.

L.C. Pochop W6LBH
Ontario, CA

ADD 160 METERS TO YOUR AMPLIFIER

If your amplifier has a tube-type pi-network output circuit, it should be an easy job to add our lowest frequency band to its coverage. Either adjust the output capacitor to minimum or disconnect it. Add an external coil (about 2-inch diameter and 4-inches long and 8 turns per inch) and 2000 pF capacitance. Partly variable. Adjust to resonance using your dummy load and reduced drive level.

Robert L. Larson W7LNG
Medford, OR

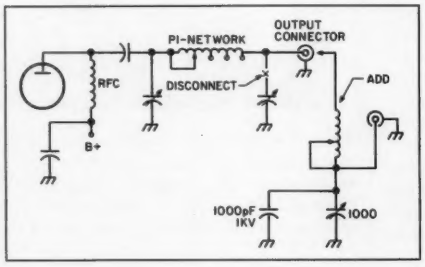

SELECTABLE NiCd CHARGER

This unit was originally built to charge cells "rescued" from bad battery packs. It is much better to slow charge NiCds. There is always the danger of forgetting to remove the cells from charge at the appropriate time, so a timer was incorporated. With the normal tolerance of tantalum capacitors, the timer should time out between 15.5 and 17 hours. The relay used is a small low current relay. A surplus 13.5 VAC 750 mA wall transformer is used as the AC source and a one amp bridge was used to recitify it. The resistors were made up of stock units in series or parallel to make up the proper value, checked with a DMM.

R.R. De Jongh WB7CPT
Bellevue, WA

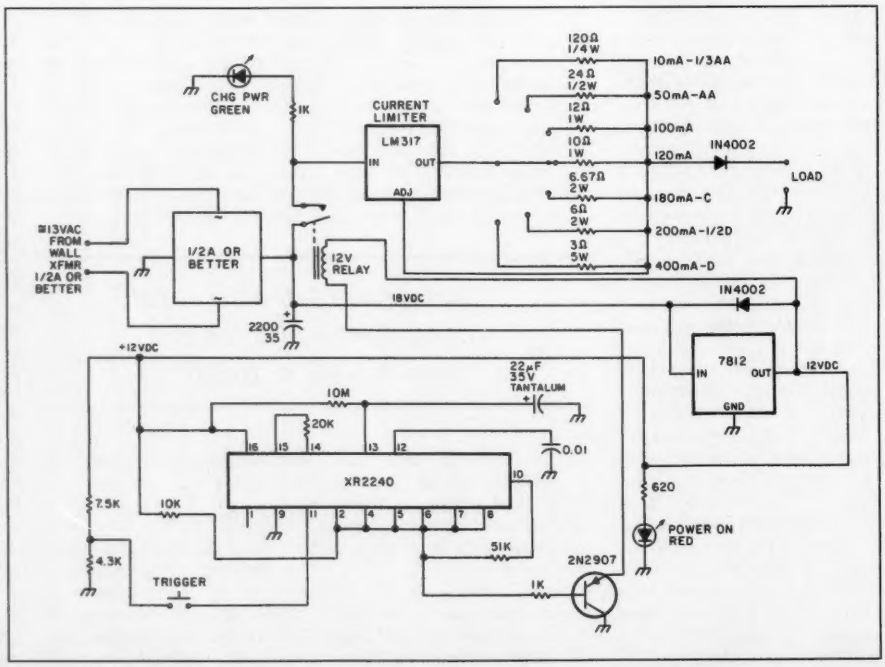

KENWOOD TS940 OWNERS

Are you frustrated tuning in SSB & CW signals because of the too fast main tuning rate of 10 Khz/revolution???
Try the NEW Copyrighted Giehl Electronics Software Kit!!

Features:

- Main tuning rate of 2 Khz/revolution LSB, USB, CW & FSK
- Main tuning rate of 20 Khz/revolution AM & FM
- Tuning rate automatically increases when the knob speed exceeds 2 turns per second to make the long QSY's fast
- Split dot CW problems solved
- Easy to install (simply remove the old IC chip from its socket and plug in the new Giehl Electronics IC chip).
- Complete instructions

Send check or money order for $25 to:

Giehl Electronics
P.O. Box 18335, Cincinnati, Ohio 45218

MOVING?
Subscription Problem?

Call our toll-free number:
1-800-227-5782
Monday through Friday
9 a.m. through 5 p.m. EST
Please have your mailing label in front of you, as well as your cancelled check or credit card statement if you are having problems with payment.

MAO Electronics Company

PO BOX 6871, ALEXANDRIA VA 22306
CHUCK 703-360-5145 MARY
MICROPROCESSOR, DIGITAL, & LINEAR IC'S
FAST AND COURTEOUS SERVICE

MAIL ORDER SPECIALS

FRANKLIN ACE 1000/1200 KEYBOARDS $15
ACECALC OR DATAPERFECT SOFTWARE $10
80 COLUMN CARDS $40
7.37 MHz TURBO KIT FOR IBM PC'S $50
HARDWARE RESET KIT FOR IBM PC/XT $10
27256-20 $5 68764 $6 80287 $100
SSI-201 & SSI-202 DTMF CHIPS $7

NO MINIMUM ORDER, LIMITED QUANTITY

CIRCLE 320 ON READER SERVICE CARD

Think you've seen it all?
TAKE A LOOK AT THIS!

Send check or money order to:
(US Funds only. Incl. $2 S/H)

MORLAN SOFTWARE
P.O. Box 2400
EAST LIVERPOOL, OH 43920-0400
THANK DAYTON

CIRCLE 153 ON READER SERVICE CARD

NextDay QSLs
Two-Color Rainbow Assortment

Call by 9 am
We delivery by 9am your time

Mapleton, Utah
KA7MQX

Quantity	NextDay	2nd Day
100	$19.95	$14.95
200	$29.95	$24.95
400	$44.95	$39.95

1971 N Oak Lane 1300 E
Provo, UT 84604-2138
AntennasWest
(801) 374-1084

CIRCLE 304 ON READER SERVICE CARD

SPECIALISTS IN FAST TURN P.C. BOARDS

PROTO TYPE P.C. BOARDS
AS LOW AS $25.00

- SINGLE & DOUBLE SIDED
- PLATE THROUGH HOLES
- TEFLON AVAILABLE
- P.C. DESIGN SERVICES

FOR MORE INFORMATION

Midland Technologies

34374 EAST FRONTAGE ROAD
BOZEMAN, MT 59715 (406) 586-1190

CIRCLE 252 ON READER SERVICE CARD

THE RF CONNECTION

"SPECIALIST IN RF CONNECTORS AND COAX"

Part No.	Description	Price
PL-259/USA	UHF Male Phenolic, USA made	$ .60
83-1SP-1050	PL-259 Phenolic, Amphenol	.85
83-822	PL-259 Teflon, Amphenol	1.50
PL-259/ST	UHF Male Silver Teflon, USA	1.50
UG-175	Reducer for RG-58	.20
UG-176	Reducer for RG-59 & MINI 8	.20
UG-21D/U	N Male RG-8, 213, 214, Amphenol	2.95
UG-21B/U	N Male RG-8, 213, 214, Kings	4.00
9913/PIN	N Male Pin for 9913, 9086, 8214 fits UG-21D/U & UG-218/U N's	1.50
UG-21D/9913	N Male for RG-8 with 9913 Pin	3.95
UG-21B/9913	N Male for RG-8 with 9913 Pin	4.75
UG-146/U	N Male to SO-239, Teflon USA	5.00
UG-83/U	N Female to PL-259, Teflon USA	5.00

"THIS LIST REPRESENTS ONLY A FRACTION OF OUR HUGE INVENTORY"

THE R.F. CONNECTION
213 North Frederick Ave. #11
Gaithersburg, MD 20877
(301) 840-5477

PRICES DO NOT INCLUDE SHIPPING
PRICES SUBJECT TO CHANGE
VISA, MASTERCARD, ADD 4%
UPS C.O.D. ADD $2.25 PER ORDER

CIRCLE 115 ON READER SERVICE CARD

RF POWER TRANSISTORS

We stock a full line of Motorola & Toshiba parts for amateur, marine, and business radio servicing

Partial Listing of Popular Transistors
2-30 MHz 12V. (28V)*

P N		Rating	Net Ea.	Match Pr.
MRF421	Q	100W	$24.00	$53.00
MRF422*		150W	36.00	78.00
MRF454, A	Q	80W	14.50	32.00
MRF455, A	Q	60W	11.75	26.50
MRF492	Q	90W	16.00	35.00
SRF2072	Q	65W	12.75	28.50
SRF3662	Q	110W	24.00	53.00
SRF3775	Q	75W	13.00	29.00
SRF3795	Q	90W	15.50	34.00
SRF3800	Q	100W	17.50	38.00
2SC2290	Q	80W	16.75	39.50
2SC2879	Q	100W	22.00	48.00

Q Selected High Gain Matched Quads Available

PARTIAL LISTING OF MISC. TRANSISTORS

BFR96	$2.75	MRF966	2.75
CD2545	16.00	MGF1402	3.75
MRF134	16.00	NE41137	2.50
MRF136	21.00	PT9847	21.00
MRF137	24.00	SD1278-1	17.75
MRF138	35.00	2N1522	11.95
MRF150	87.50	2N3553	2.25
MRF174	80.00	2N3771	3.50
MRF208	11.50	2N3866	1.25
MRF212	16.00	2N4048	11.95
MRF221	11.00	2N4427	1.25
MRF224	13.50	2N5109	1.75
MRF226	14.50	2N5179	1.00
MRF227	3.00	2N5589	7.25
MRF237	2.70	2N5590	10.00
MRF238	12.50	2N5591	13.50
MRF239	14.00	2N5641	9.50
MRF240	15.00	2N5642	13.75
MRF245	27.50	2N5643	15.00
MRF247	26.00	2N5945	10.00
MRF260	7.00	2N5946	12.00
MRF262	8.75	2N6080	6.25
MRF264	12.50	2N6081	8.00
MRF317	56.00	2N6082	9.50
MRF406	12.00	2N6083	9.75
MRF433	11.00	2N6084	11.50
MRF450	13.50	2SC730	1.25
MRF453	15.00	2SC1307	3.00
MRF458	20.00	2SC1946,A	15.00
MRF475	3.00	2SC1947	9.75
MRF476	2.75	2SC1969	3.00
MRF477	11.75	2SC2075	3.00
MRF479	10.00	2SC2097	28.00
MRF485	6.00	2SC2166	3.50
MRF485 MP-KEN	18.00	2SC2312	4.95
MRF492A	18.75	2SC2509	9.00
MRF497	14.25	2SC2630	28.00
MRF515	2.50	2SC2640	15.00
MRF555	3.00	2SC2641	16.00
MRF607	2.50	3N204	2.00
MRF630	4.25	40582	7.50
MRF641	18.00	*OUTPUT MODULES*	
MRF644	21.00	SAU4 450 MHz	55.00
MRF646	25.00	SAU17A 903 MHz	50.00
MRF648	31.00	SAV6 150 MHz	42.50
MRF660	10.75	SAV7 145 MHz	42.50
MRF837	2.25	SAV15 222 MHz	48.00
MRF846	43.50	M57712, M57733	use SAV7
MRF901	1.25	M57737, SC1019	use SAU4
MRF911	2.00	SC1027	

Hi-Gain, Matched, and Selected Parts Available

We stock RF Power transistors for Atlas, KLM, Collins, Yaesu, Kenwood, Cubic, Mirage, Motorola, Heathkit, Regency, Johnson, Icom, Drake, TWC, Wilson, GE, etc. Cross-reference on CD, PT, SD, SRF, JO, and 2SC P/Ns.

Quantity Pricing Available Foreign Orders Accepted
Shipping/Handling USA $5.00 COD VISA MC
Orders received by 1 PM PST shipped UPS same day. Next day UPS delivery available

PARTS ORDERS ONLY — NO TECHNICAL
(800) 854-1927
ORDER LINE and/or TECH HELP
(619) 744-0728
FAX 619-744-1943

RF PARTS
1320 Grand Avenue
San Marcos, CA 92069

PROPAGATION

Jim Gray W1XU

Jim Gray W1XU
210 Chateau Circle
Payson AZ 85541

HOT DX!

June has several interesting characteristics including the longest day of the year; the greatest amount of potential ionization; and the longest band openings from our part of the world to DX locations. It is also the month when VHF opportunities abound. The general conditions for DX are expected to be good for the first ten days of the month, fair to poor for the next ten days, and fair to good for the last ten days. The daily forecast will indicate the days on which the magnetic field is expected to be unsettled (F), to active (P). DX will not be as good as it was in March—April, or as good as it will be in September—October, but the sunspot numbers and solar flux values are climbing, so good openings may occur. In particular, look for the gray-line DX along the darkness path at dawn and dusk, since signals can be excellent at these times.

The best days for any DX path, particularly the difficult ones, is when the solar flux rises to about 100 or more, and the magnetic field is quiet (G). The A and K indexes for the day and the solar flux, may be found by tuning in to WWV at 18 minutes past each hour. Because WWV gives data for the previous day and the expected data for the following day, plot trends may be made.

Bear in mind that daily forecasts may vary one way or the other, by a day or two. Sometimes the sun and magnetic fields don't behave as predicted at all, that makes propagation forecasting as much an art as science!

JUNE

SUN	MON	TUE	WED	THU	FRI	SAT
			1 F–G	2 G	3 G	4 G
5 G	6 G	7 G	8 G	9 G	10 G	11 F
12 F–P	13 F–P	14 P	15 P	16 P	17 P	18 P–F
19 F	20 F–P	21 P	22 P–F	23 F	24 F–G	25 G
26 G	27 G–F	28 F	29 F–G	30 G		

EASTERN UNITED STATES TO:

GMT:	00	02	04	06	08	10	12	14	16	18	20	22
ALASKA	--	--	--	--	--	--	20	--	--	--	--	--
ARGENTINA	20	20	20	40D	40D	--	--	--	--	--	10	15
AUSTRALIA	--	--	--	20	20	40D	20D	20D	--	--	--	--
CANAL ZONE	15	20	20	--	--	--	20	20	20	--	10D	15
ENGLAND	20	--	40/80	40/80	--	--	--	--	--	20	20	20
HAWAII	15D	20	20	20	40D	40D	--	--	--	--	--	15D
INDIA	20D	20D	--	--	--	--	--	--	--	--	--	--
JAPAN	--	--	--	--	--	--	20	--	--	--	--	--
MEXICO	15	20	20	--	--	--	20	20	20	--	10D	15
PHILIPPINES	--	--	--	--	--	--	20D	--	--	--	--	--
PUERTO RICO	15	20	20	--	--	--	20	20	20	--	10D	15
SOUTH AFRICA	--	40	40	20D	20D	--	--	--	--	--	20D	20D
U. S. S. R.	20	20/40	20/40	--	--	--	--	--	--	--	20	20
WEST COAST	40	80	--	--	--	--	--	20	20	20	15	40

CENTRAL UNITED STATES TO:

ALASKA	--	--	20D	--	--	40D	--	20	--	--	--	--
ARGENTINA	20/40	20/40	20	40D	--	--	--	15	15	15	15/20	20
AUSTRALIA	15D	15D	15/20	20	20	40D	20	20	--	--	15D	15D
CANAL ZONE	20	20	20	40D	40D	--	20	20	15/20	15	10D	10D
ENGLAND	20	--	40D	40D	--	--	20D	20D	--	--	20	20
HAWAII	15	15	20	20	20	40D	20	20	--	--	--	15D
INDIA	20D	20D	--	--	--	--	20D	20D	--	--	--	--
JAPAN	--	--	20D	--	--	40D	--	20	--	--	--	--
MEXICO	20	20	20	40D	40D	--	20	20	15/20	15	10D	10D
PHILIPPINES	--	--	--	--	--	--	20D	20D	--	--	--	--
PUERTO RICO	20	20	20	--	--	--	20	20	15/20	15	10D	10D
SOUTH AFRICA	--	--	40D	20D	20D	--	--	--	--	--	--	--
U. S. S. R.	--	--	--	--	--	--	20D	20D	--	--	--	--

WESTERN UNITED STATES TO:

ALASKA	--	--	--	20	20	20D	40D	20D	20D	--	--	--
ARGENTINA	15	20D	20	20	--	--	--	20D	--	--	--	15
AUSTRALIA	15	15	15	20	20	20/40	40	20/40	--	--	--	--
CANAL ZONE	10D	15	20	20	40D	40D	--	20	20	--	15	10D
ENGLAND	20	20	20D	--	--	--	--	20D	--	--	--	20D
HAWAII	15	15	15/20	20	20	20/40	40/80	--	20	--	15D	15
INDIA	--	--	20D	20D	--	--	--	20D	20D	--	--	--
JAPAN	--	--	--	20	20	20D	40D	20D	20D	--	--	--
MEXICO	10D	15	20	20	40D	40D	--	20	20	--	15	10D
PHILIPPINES	--	--	--	20D	20D	--	--	20D	20D	--	--	--
PUERTO RICO	10D	15	20	20	40D	40D	--	20	20	--	15	10D
SOUTH AFRICA	--	--	--	20D	20D	--	--	--	--	--	--	--
U. S. S. R.	20D	20D	20D	--	--	--	--	20D	--	--	--	--
EAST COAST	40	80	--	--	--	--	--	20	20	20	15	40

The band openings are for June, July and August. Note that a (D) will indicate a difficult path. Try on days when the geomagnetic field is quiet (G) and when solar flux is 100 and greater.

Tropospheric Propagation

Summer usually brings with it enhanced propagation conditions for the VHF and UHF bands. Most of the weather occurs in the lower portion of the atmosphere, or troposphere, and many times certain weather will support VHF/UHF propagation over hundreds of miles, well beyond normal line-of-sight.

Atmospheric conditions can bend radio waves, just like they affect light to create mirages and other optical illusions. In the case of radio signals, the distribution of water vapor has a dominant effect on tropospheric propagation. Water vapor content, atmospheric pressure, and temperature all determine the atmosphere's index of refraction, n, which is a measure of air's transmission characteristics. In particular, $n = 1 + N \times 10^{-6}$, where N is called refractivity. Refractivity is calculated by $N = (77.6P/T)+(4810e/T^2)$, where P is atmospheric pressure in millibars, T is temperature in degrees Kelvin, and e is the water vapor pressure in millibars.

When all of these variables change quickly as a function of height, or when the atmosphere is layered as in the case of a cold or warm front, tropospheric propagation can be very favorable. In fact, if n changes very sharply, say within the lower 500 feet of the atmosphere, signals can become trapped in a tropospheric "duct." Ducts can even support microwave propagation over distances of 1000 miles or more!

Hi Pro Repeaters
MELCO

MAGGIORE ELECTRONIC LAB.

Manufacturers of Quality Communications Equipment

- •Repeaters
- •Links
- •Remote Base
- •VHF,UHF
- •Receivers
- •Transmitters
- •Antennas

- •Standard and Computerized Controllers
- •Standard and Computerized Auto Patches
- •Duplexers

Hi Pro `E´ EXPANDABLE REPEATER SYSTEM

• A NEW CONCEPT IN REPEATER DESIGN, THE Hi Pro "E" IS AN EXPANDABLE REPEATER WITH THE FOLLOWING FEATURES: A BASIC REPEATER WHICH WOULD INCLUDE A COMPLETE RECEIVER, TRANSMITTER, COR, FRONT PANEL CONTROLS AND INDICATORS, LOCAL SPEAKER AND MIC JACK AND CAPABLE OF FUTURE EXPANSION. ALL HOUSED IN AN EXTREMELY RUGGED, ENCLOSED, 19-INCH RACK MOUNTABLE CABINET.

• THIS SYSTEM CAN BE EXPANDED AT TIME OF PURCHASE OR CAN BE AN AFTER-PURCHASE ADD ON. THE ADD ONS ARE—HIGHER POWER, 110/220 VAC POWER SUPPLY, IDENTIFIER, AUTO PATCH, OR COMPUTER CONTROLLERS. IN ADDITION TO THESE ADD ONS AN ADDITIONAL RECEIVER AND TRANSMITTER CAN BE MOUNTED INTERNALLY FOR USE AS CONTROL LINKS, REMOTE BASE OR DUAL BAND OPERATION, ETC.

• AN EXTENSION PANEL IS AVAILABLE FOR LOCAL MONITORING OF THE REPEATER AND CONTAINS ALL NECESSARY METERING, STATUS LIGHTS AND INDICATORS. ALL ADD ONS ARE AVAILABLE FROM THE COMPANY AND ARE COMPLETE INCLUDING INSTRUCTIONS.

MAGGIORE ELECTRONIC LAB.

600 Westtown Rd. West Chester, PA 19382 Phone (215) 436-6051 Telex 499 0741 MELCO

WRITE OR CALL FOR OUR COMPLETE CATALOG

CIRCLE 47 ON READER SERVICE CARD

CTM

Hey LOOK !

Your Friends have been talking!

The Secret's Out !

CTM

CTM is the ham radio and computer magazine with that "down home flavor", dedicated to the practical aspects of Amateur Communications. Just starting out? You'll find our well-illustrated tutorials friendly and open; we show you how. If your interest is in High Tech, you'll find reviews and user reports of the latest thing to come down the pike and they are written so you can understand them too! If your interest is in training, you'll find articles for ham radio, computers and emergency communications.

You'll find it **ALL** in **CTM**

$18. year U.S. - 6 Months $10.
Mexico & Canada $32. year
Other Countries (air) $68. (Surface) $43.

There is always time for some friendly fun that you don't need a license to enjoy — and appreciate...

Are you into **Packet Radio?** Thinking about it? Then you **definitely** need **CTM!** During 1987 we had **65** packet and packet related articles and that doesn't even count the other **HAM** articles or the many **Computer** articles. The other four ham magazines* only had 26 packet articles during 1987. There's something for everyone in **CTM!** Jump right in, you'll find the natives friendly — and helpful, too!

******CQ*™ 5 articles; *Ham Radio*™ 10 articles; *QST*™ 5 articles and *73*™ 6 articles = 26 articles for 1987 for the other ham magazines...

VISA Add 5% for credit cards MasterCard

Name:_____
Call Sign:_____
Address:_____
City:_____ ST ZIP
Phone No. (___)_____

CTM Magazine
Circulation Manager
1704 Sam Drive
Birmingham, AL 35235
(205) 854-0271

NOW which do you need to SUBSCRIBE?
CTM of course!

CIRCLE 11 ON READER SERVICE CARD

HAMSATS

Amateur Radio Via Satellite

Andy MacAllister WA5ZIB
2310 Romayor Court
Pearland TX 77581

Spaceborne Bits

Amateur satellites and *73*'s theme this month, digital communications, have much in common. Excluding CW telemetry, digital hamsat-generated transmissions began with AMSAT-OSCAR-7. This satellite used RTTY as an alternative to CW for communicating its vital signs to control stations on earth. There's been a rapid move to high-speed ASCII and packet since this beginning in the early seventies.

AMSAT-OSCAR-10 used PSK (Phase Shift Keying) at 400 baud as the primary downlink of telemetry. This speed and format is also incorporated in the system on board Phase 3C. Only a few stations around the world are designated for ground control of the satellite's functions. Before the memory on A-O-10 gave out, these stations were able to leave short messages for each other via specially designated parts of the telemetry data stream set aside for this purpose. It worked well as a limited form of store-and-forward communications.

The UoSAT series have provided many with an opportunity to experiment with automatic data capture and telemetry decoding using mainly 1200 baud ASCII. With several passes a day from two satellites, UoSAT-OSCAR-9 and UoSAT-OSCAR-11, it's easy for interested hams to find orbits that fit their operating schedules.

Store-and-Forward

In addition to the telemetry and bulletins, UoSAT-OSCAR-11 provided the first amateur satellite store-and-forward system for use by hams not actively involved as ground control stations. This DCE (Digital Communications Experiment) on U-O-11 has allowed global communications for designated stations active in the experiment and others with packet connection to them. The DCE shares downlink frequencies with the beacon and uplink frequencies with satellite command channels, so access must be limited.

Gateway stations have been created to allow other amateurs to pass messages through the system. These stations collect traffic from local and regional packet systems and send the messages to the satellite while downloading messages for local distribution. Harold Price NK6K in Redondo Beach, near Los Angeles, is one of the U.S. stations set up to forward traffic through U-O-11.

In August of 1986, Fuji-OSCAR-12 became amateur radio's first packet radio satellite available for general use. Although power budget problems prevent long continuous operation, this offering from the cooperative efforts of the Japan Amateur Radio League, JAMSAT and NEC, may be used by any licensed amateur with the desire and equipment needed to do the job. Due to the special equipment requirements, there aren't many stations using this resource. This is both good and bad.

Two-sided Coin

On the good side, it keeps activity to a manageable level. The satellite can only handle a limited number of "connected" stations at a time. Imagine the confusion of a single digipeater with most of the United States able to hit it via line-of-sight. If this "digi" only provided bulletin board service most of the time like F-O-12, any reasonable communications would be uncontrollable, since everyone on the system simultaneously attempts to upload messages and read replies.

The bad news is that for many, F-O-12's digital transponder is too much effort for too little return. Look back to the August 1987, Hamsats column. A station minimally equipped for F-O-12 Mode JD (the digital mode) will have two-meter FM with reasonable antennas or power or both; 70cm sideband receive capabilities; with an automatic circuit for Doppler correction of the downlink frequency during the pass; a PSK modem hooked to a packet radio TNC (Terminal Node Controller); and a computer. Other niceties that make the system more manageable include an automatic computer-driven rotator system and high-gain circularly-polarized antennas with power and preamplifiers. It is also useful to have a way to capture all of the activity on a pass via recorder, disk storage or paper print-out.

A few hundred hams around the world have put the pieces together, but for others, the wait for packets from space continues.

P3C's New Offerings

With the launch of Phase 3C, a new form of packet radio experiment from orbit will begin operation. Although access won't be limited to select stations, the equipment requirements will keep away all but dedicated enthusiasts.

RUDAK (Regenerating Transponder for Digital Amateur Communications) uses 1269 MHz 2400-baud PSK for the uplink and 400-baud PSK on 435 MHz for the downlink. The exact frequencies are shown in Table 1. A complete RUDAK earth station will start with a PSK modulator; two-meter transmitter set up for the necessary bandwidth to handle 2400 baud; and a two-meter-to-24cm transmit converter with power amplifier. For receive, any good 435 MHz multi-mode rig will do. The antenna for 24cm should be at least a 45-element loop Yagi or a four-foot dish with circular feed. An 18-element crossed Yagi with preamp will work well on 70cm.

The heart of the system includes a computer, or terminal, and a modified TNC2 (or clone) with an appropriate demodulator connected to the modem disconnect jack inside the TNC. Like the F-O-12 modems, nothing is available in commercial form prior to launch and subsequent proof that the system works in orbit. Empty circuit boards from AMSAT DL in West Germany or AMSAT UK in England can be purchased for those who can't wait.

It will require serious effort to build a complete system. The majority of RUDAK users will likely be European satellite/packet experimenters until competitively-priced 24 cm radios and appropriate modems can be bought or constructed from kits available here in the states.

Mode B:	Uplink:	435.420–435.570 MHz
	Downlink:	145.975–145.825 MHz
	General Beacon:	145.812 MHz
	Engineering Beacon:	145.965 MHz
Mode JL:	Uplink 1:	1269.620–1269.930 MHz
	Uplink 2:	144.425–144.475 MHz
	RUDAK up:	1269.710 MHz
	Downlink 1:	435.715–436.005 MHz
	Downlink 2:	435.090–435.940 MHz
	RUDAK down:	435.677 MHz
	General Beacon:	435.651 MHz
Mode S:	Uplink:	435.601–435.637 MHz
	Downlink:	2400.711–2400.747 MHz
	Beacon:	2400.325 MHz

Table 1. Revised Phase 3C Frequency Plan

The Next Generation

A third UoSAT spacecraft, UoSAT-C, is currently under construction at the Engineering Research Unit at the University of Surrey in England. It is scheduled for launch as early as the end of this year on a Delta launch vehicle. The orbit will be circular and 500km high with a 43° inclination.

Among the many experiments on board is PCE (PACSAT Communications Experiment). Using a Mode J style system with two-meter uplink and 70cm downlink, the PCE will be available for amateur radio use, while additional frequency allocations may be used by VITA (Volunteers in Technical Assistance) outside the amateur bands. VITA activities will focus on message store-and-forward from remote areas to provide technical assistance and disaster relief. Access will be much easier since the system will use FM up and down with standard TNC's and no external modems.

In a recent demonstration of the potential of a LEO (Low Earth Orbit) packet satellite operation to U.N. officials, AMSAT NA President, Rip Riportella WA2LQQ used a complete station carried in an attache case. With external ground-plane antennas in place, the station could be used for reliable and portable satellite communications through a future PACSAT. Such a system would be used primarily for emergency use from remote locations.

Companies supporting the demonstration included Radio Shack with a new model laptop computer, Yaesu with the latest miniature HT's, and Tasco of Japan with their new ultra-miniature TNC, the size of a cigarette pack. The day for easy satellite packet operation may come soon.

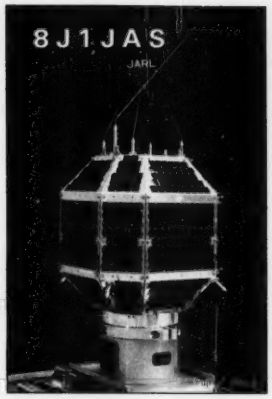

Photo A. Fuji-OSCAR 12 QSL card.

QSLs Available

For those who have listened to or operated through F-O-12, the JARL has a very nice full-color QSL available for a reception report of the downlink telemetry. A sample is shown in Photo A. Send to the JARL, 1-14-2 Sugamo, Toshima, Tokyo 170, Japan.

The University of Surrey has QSL cards for reception reports of U-O-9 and U-O-11. A U-O-11 card is available by sending a detailed report of digitalker reception during the Skitrek/Project Nordski Comm operation to: UoSAT Spacecraft Engineering Research Unit, University of Surrey, Guildford, Surrey GU2 5XH, England.

Field Day

June is Field Day month and a satellite station in the woods or out on the beach is great fun. Satellites available for use this year may include RS-10/11, A-O-10 and F-O-12.

For RS-10/11 a simple station should do the job, but don't cut corners. With the transponder full of stations looking for the bonus points for a satellite QSO, those with only a few watts to quarter-wave whips will have trouble getting a complete exchange through. For two-meters, use a small to moderate beam, and on ten meters a dipole will work fine. Hopefully, the satellite will be in Mode A only, since simultaneous Mode K operation, with its 15-meter uplink, will put a lot of earthbound Field Day participants unwittingly in the transponder passband. Watch out for generator noise, the HF stations nearby, and take along a preamp.

AMSAT-OSCAR-10 should be in full sunlight by the end of June. Check the AMSAT nets for the latest schedule of operation. The satellite experiences a little eclipsing on almost every orbit in 1988, so strict adherence to posted schedules is important to preserve the batteries. Antennas for this satellite are not quite as portable compared to an RS-10/11 arrangement. A 14- to 20-element crossed Yagi with preamp for the Mode B two-meter downlink, and 25 watts to a 16- or 18-element crossed Yagi on 70cm should be sufficient. Some hams have made several contacts on Field Day with much less, but usually with a very experienced satellite chaser operating the station.

For F-O-12, the antennas used for A-O-10 will do the trick, but that's assuming that the satellite is available for Mode JA, the analog transponder mode, for Field Day. Last year the satellite was scheduled for JD operation for the duration of the outing.

Get your club or group involved with a satellite Field Day station. It does not count as a transmitter in the final tally, yet it can make a lot of points if conditions are right. It is also a fine opportunity to demonstrate the fun of hamsat activity. 73

Launch and Orbit
Launch at: 20:45, 12 August, 1986 UTC
Launch by: NASDA, with H-I rocket
Launch from: Tanegashima Space Centre, Japan
Orbit: circular, altitude of 1500km
Period: 116 minutes
Inclination: 50 degrees

Construction
Weight: 50kg
Configuration: polyhedron of 26 faces covered in solar cells
Size: 400mm (dia) X 470mm (height)

Antennas
Receiving: A quarter Wave slanted monopole at the top of satellite.
Transmitting: A turnstile at the top for analog signal, and a turnstile at the bottom for digital signal; both radiate circular polarized wave.

Power
Solar array: output 8.5W,n/p silicon 2cm X 2cm
Storage Battery: NiCd, 6AH

Table 2. Major Specification of JAS-1

THE WORLD
Is Yours For Only
$5.00

Yes, places you've never even heard of! Nearly 400 DX countries gleaned from the Awards Lists of dozens of IARU members—more countries than any other map available anywhere! ARRL's DXCC map doesn't even come close!

73 Magazine offers readers our giant DX Map of the World for the absurdly low price of only $6.00.

Order now....

See Uncle Wayne's Books

OSCAR MODE-J FILTERS

PREVENT DESENSE OF YOUR DOWN-LINK RECEIVER

MMf200-7 (usually sufficient)	$50.00	PSf432 (for extra protection)	$90.00
I.L. @ 145 MHz	0.5dB	I.L. @ 435 MHz	0.1 dB
Loss @ 435 MHz	40 dB min	Loss @ 145 MHz	70 dB typ

Send 66 ¢ (3 stamps) for detailed specs on all VHF & UHF products. Shipping FOB Concord, MA
PRICES SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
SPECTRUM INTERNATIONAL INC. **(617) 263-2145**
P.O. Box 1084S, Concord, MA 01742, USA

CIRCLE 183 ON READER SERVICE CARD

HIGH PERFORMANCE

When you think of high performance, you should be thinking of "International Radio Inc." We Sell High Performance 8 and 10 pole Crystal Filters for most models of ICOM®,KENWOOD® and YAESU® Radios.We also sell High Performance radios with up to 16 -poles of Crystal Filtering, installed.We can also install any factory changes, or changes from our Monthly Int'l Radio ICOM®, Kenwood® or Yaesu® NEWSLETTERS.Back issues available from 1979. We service most Amateur Radio products. We also Sell IBM® Compatible XT-AT Computers, call or write for our latest brochure.

SERVING AMATEUR RADIO
9 YEARS

INTERNATIONAL RADIO, INC.
751 S. Macedo Blvd.
Port St. Lucie, FL 34983
(305)879-6868

CIRCLE 97 ON READER SERVICE CARD

TECH TIPS

PC-Board Fabrication

W.C. Cloninger's article, "EZ PCB's," was very interesting (*73 Amateur Radio*, August 1987). TEC-200 film is unquestionably the easiest of several PC board processes that I have tried, but it does have its limitations. I would like to share some of my PC-board fabrication experiences with other readers.

Be aware that thermal expansion of TEC-200 film while transferring an image to the copper surface tends to spread or smear the pattern. This effect is small and does no harm in most cases but could be a problem with large boards, especially those with very fine traces.

A far more serious problem is size change when photocopying. Most office photocopiers don't make copies that are exactly 100 percent of the original size and of course the error is doubled when making a reversed image. I had to discard some etched and drilled boards because the holes didn't even come close to matching pins on a long connector. Check dimensions on the final film before proceeding with the remaining steps. If the error is too large, try another copy machine.

With regard to etching, the author alludes to warming the etchant to speed up the process. As a matter of fact, heating the etchant to 90° to 115° is mandatory to achieve advertised etching times. I used a 250 watt heat lamp about 12 inches above the tray.

Continuous agitation to bring fresh etchant into contact with the copper is also essential. A motorized tray rocker is handy (though not essential) and numerous designs have appeared in amateur radio publications. Experimenters who make many boards may want to build a bubble etcher for even greater efficiency. Jim Stinson has described an easy-to-build etcher that utilizes a plastic refrigerator box and an aquarium air pump in *QST*, November 1984, page 45.

Finally, don't "push" the etchant too far. Depleted etchant works slowly and produces poor results. For tray etching of average to large size boards, I use just enough etchant to cover the board and discard it after a single use. This procedure may be modified when making several small boards or for bubble etchers, which generally require a larger volume of etchant.

Experimenters should not feel intimidated by these comments. Printed circuit board fabrication isn't as difficult as it might appear and TEC-200 film is an excellent way to get started. Proceed carefully, making corrections if needed, and you're likely to turn out a perfect board on your very first attempt.

Scott Hofer N7DFR
Federal Way WA

Flashlight Battery Hazard

Recently, an individual replaced the 1.5 volt, D-size batteries in a flashlight. The batteries were of two different brands and types (one general purpose and one alkaline battery). The flashlight was checked for operation and issued for use. Ten minutes later a worker returned the flashlight as inoperable. The inoperable flashlight was placed aside and a new flashlight issued. Twenty minutes later, the inoperable flashlight was checked for condition. The handle was too hot to hold and nearly burned the individual handling the flashlight. The individual then used a cloth to empty the batteries into a metal container so as not to damage the counter top. The plastic covering of the alkaline battery began to melt and was too hot to handle for 1.5 hours. The incident was reported to wing safety of an AF Form 457, Hazard Report.

Investigation of the incident found a warning on the alkaline battery which read: "Do not dispose in fire, recharge, put in backwards, mix with used or other battery types. May explode, leak or cause personal injury." The incident was caused by the mixing of two different types of batteries. Alkaline and rechargeable batteries (nickel-cadmium) should always be used by themselves.

Normally, general purpose (carbon-zinc) and heavy duty (zinc chloride) batteries may be mixed together in the same flashlight or electronic component (portable radio, tape player, etc.). However, alkaline and rechargeable should always be used alone and never mixed with any other type of battery. Mixing of either of these two types of batteries could cause a hazard. For example, if a rechargeable battery and an alkaline battery is used in a flashlight, the rechargeable battery will probable lose its charge first. This may cause the alkaline battery to reverse its charge or leak.

The alkaline battery is an extremely powerful battery and should be handled carefully following the manufacturer's instructions for the battery and the equipment being powered by the battery. If the spring in the battery compartment should tear the protective coating of the battery, it could cause the battery to short out and overheat. An alkaline battery that overheats can reach a temperture of 200 degrees Fahrenheit, which could cause burns when handling. For this reason, alkaline and rechargeable batteries should be handled carefully at all times.

Craig Bledsoe K4TXK
Fairbanks AK

A Quick HT Holder

An inexpensive dashboard mount for handheld transceivers can be made by attaching a colonial-style strap-iron drawer pull to the top of the dashboard with screws. Bend the ears slightly to compensate for the slant of the dashboard padding. Hook the HT's belt clip over the handle.

Screw a small cabinet hook to the dashboard to hold the power and antenna cables out of the way of the HT's front panel.

The HT can easily lift off the mount and use it anywhere in the vehicle. A number of holsters and mounts are available on the market for holding an HT on a vehicle dashboard. These are much more expensive than this simple handle, and none holds the HT any better. Also, they take up much more room on the dashboard when the HT is not present.

Charles E.Cohn KK4CS
Austell GA





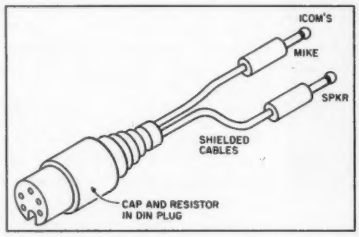

Fig. 1. (top left) How to configure the circuit parts for "Connecting Circuit" to fit inside the DIN plug.
Fig. 2. (Top right) Circuit to interface the PK-232 with the IC-02AT.
Fig. 3. (bottom) The patch cord connecting the PK-233 with the 02-AT.

Connecting Circuit

I have read with interest the 1987 issue on Packet. The circuit to connect an IC-2AT is interesting. However there is a much simpler way to do it.

I have been using an IC-02AT for more than a year with an MFJ-1270 and later with a PK-232. I obtained the information on how to connect my rig to the TNC from the local BBS VE7KIT. I don't know who originated this connecting circuity, *It's Not Me!* And I don't take credit for it!! But it works really well! One may have to experiment with the value of the resistance the recommended 33kΩ worked fine with my system. I don't have any RFI problems and my TX Delay works fine at zero. I built the whole "circuit" in the DIN plug itself (isolating the leads to avoid shorts) as there is only a cap and a resistor.

I have seen this circuit on our BBS for months and I thought it was available on all BBS. As far as I know it works for the IC 2-AT as well as the 02-AT.

Patrick M. DuBois
Richmond, B.C. CANADA

Ten Meter Ground Plane Antenna

Now that the sunspots are returning and lower grades are admitted to ten meters, many people are shopping for suitable antennas. My choice was to build a ground plane, using a matching system which was widely used (commercially) on two meters about twenty years ago, which some people call a Beta match.

Actually, it is a shorted stub in parallel with the feed point, using one of the radials as part of the stub. It is very tolerant and broad-banded, which is important on such a wide band as ten. I made mine for 29 MHz, because I am interested in FM, but it works adequately over the whole band. Longer dimension would lower the frequency to your choice.

Radiator and radials are 8' 2" long and the stub is a 19" piece of RG8U, with cover and braid removed, wrapped in a loose spiral around the radial to keep it from sagging. Make all of the elements adjustable so it can optimize for frequency and SWR. This is a grounded antenna, for DC and perhaps also for lightning!



Fig. 4. 10m ground plane antenna.



Fig. 5. Bracket for coax socket.

Improved J Pole Match

I have liked J poles for years and built many of them, but never found a simple way to get a completely flat SWR. Now I have. It looks a little unconventional in theory but it measures well. I made this one with square aluminum tubing, which is easier to work with mechanically, although not always easily available. If available, the mounting hardware is simpler as the diagram shows. The main difference between this model and others is the length of the radiating portion, which is increased from 38" to 47½" and allows a completely flat match at the design frequency. SWR readings are shown in Figure 2. Apparently, what we have here is a ⅝ wave element and a quarter wave matching section, at DC ground potential at the bottom, in the usual fashion. Remember that on these frequencies, lead dress of coax affects SWR as does proximity to other objects. Adjust installation with a meter for best results.

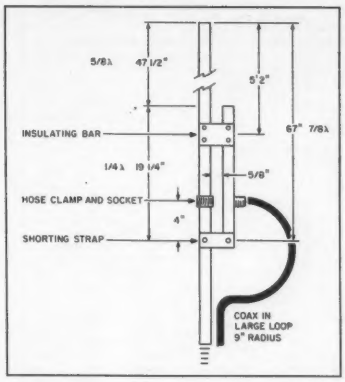

Fig. 6. Construction details of the improved J-Pole match.

Materials:

two pieces ¾" square aluminum tubing, one 19¾" for stub, one at least 7' long, for the radiator and main support, drilled for 8–32 bolts as indicated.

aluminum strap, ¾" x 2½" drilled one 7.16" ctr.

insulating bar, 2" x 2½" drilled one 7.16" ctr.

stainless steel hose clamp

small bracket to support coax socket (see drawing)

short piece of #14 wire between socket and stainless steel strap.

eight 8–32 bolts, nuts, and lock washers

Wm. Bruce Cameron
Temple Terrace FL

Number 38 on your Feedback card

INDEX: June 1988

Issue #333

220 MHz ... 26-27
2211 PLL ... 61
3CX800 amplifier ... 27
4X4HQ ... 90
4Z4RM ... 90
74C02 NOR gates ... 12
74HC74 D flip-flops ... 12-13
74HC75 latch ... 12
74HCO2 gates ... 12
74HCOO NAND gates ... 12-13
7805 regulator ... 12
7910 modem chips ... 61
7S8AAA ... 92
8877 amplifier ... 27
9N1MC, Krishna B. Khatry ... 91
9N7YDY ... 91
AB4Y, Chuck ... 92
AEA PK-232 ... 62
AEA Pakratt PK-64 ... 85, 100
AFSK RTTY ... 26
AG-30 preamplifier ... 26-27
Alpha amps ... 85
Amplifier add-on ... 74
AMSAT ... 4, 9, 29-31, 78-79
AMTOR ... 4, 26-27, 85
antenna, 10 M grounded ... 80-81
ASCII Models 33/35 ... 4, 62, 78
Australia ... 87, 100
AX.25 protocol ... 60-61
BARTG ... 85
battery hazard ... 80
BAUDOTC.EXE ... 62
Baudot/Murray Models 12/14/15/19/26/28/31A/32 ... 4, 62
BCD driver chip ... 13
beacon transmitter correction ... 100
Bell 202T modem ... 60
binary counter/controllers 74HC160/390/161/393/191/4017/4060 ... 13
Bird 43 wattmeter ... 27
bi-stable multivibrator ... 11
Boonton 92 millivoltmeter ... 27
BPSK modulation ... 34-36
BT6LS ... 90
BT6ZML ... 90
Calectro milliammeter ... 65
Canada ... 91, 98
CARF ... 91
Centronics interface ... 55
CEPT Recommendation ... 92
China ... 90
circuit dividers ... 13
circuit versatility ... 11-13
CMOS NAND and NOR gates ... 12-13
CoCo ... 62
Commodore C-64 ... 65
compact equipment ... 42
CP/M computers ... 57
CQWW RTTY ... 85
CRRL 1988 ... 91
CRSA ... 90
CSMA ... 60
Cushcraft 220 Boomer ... 27
Czechoslovakia ... 90
dashboard mount ... 80
DB-25 connector ... 41
DC4OX, Michael Roehner ... 61
decoder 4+1 DTMF correction ... 100
DF2AU, Hans Georg Giese ... 61
digipeater string ... 23
Digital Novice, The ... 67
Down East Microwave ... 65
Drake L4B ... 27
duplex digipeater ... 60
DX ... 9, 67, 85, 87, 90-92
Esperanto ... 90
European Common License ... 92
Evolution from Space ... 45
F6ABJ ... 92
FA1MSG, Sandrine ... 92
FCC ... 9, 60, 98, 104
FD1DGY, Claude Guee ... 91
FE6EPZ, Therese Normand ... 91
FN42 ... 90
France ... 91-92
Gateway project ... 78, 91-92
HARTS ... 92
Heath HW-8/9 ... 67
Henry 2K ... 85
HL5AP, Byong-joo Cho ... 90
Hong Kong ... 92
Hoyle, Sir Fred ... 45
HP608F generator ... 27
IC-2AT circuit ... 80
ICOM AGS ... 27
ICOM CIS ... 26
ICOM HM-12 ... 27
ICOM IC-375A 220-MHz Tranceiver ... 26-27
ICs, 7400 series TTL ... 12
ICs, 74LS00 series ... 12
ICs, J-K models ... 13
ILERA ... 90
IMRA ... 9
interfacing electronic equipment ... 4, 40-41
Israel ... 90
J Pole ... 61
JA1ACB ... 85
JAMSAT ... 78
Japan ... 91
K9EL, Jim Grubbs ... 67
KA9Q, Phil Karn ... 61
Kleinschmidt ... 62
KR3T, Jonathan Mayo ... 67
KT1N ... 85
KT2B, Pete Putman ... 64
LMW 23C4-MHz transverter kit ... 64-65
MAKERTTY ... 62
MC14013 ... 55-56
METEOSAT ... 70, 104
Midland 13-509 receiver ... 60
milliwatt rig ... 67
Mirage C1012 amplifier ... 27
N5AHD, Robert J. Diersing ... 29
N6HYK, Leon Fletcher ... 87
NAND and NOR gates ... 13
NBFM receiver, transmitter ... 60
NEC ... 78
Nepal ... 91
NET/ROM ... 61
network topology ... 61
NiCd charger ... 74
NK6K, Harold Price ... 78
NM7M, Bob Brown ... 67
Northern Germany Packet Group ... 61
OK3CMZ, Rudolf Karaba ... 90
Operation World-Wide ... 44-45
OSCAR ... 29-31, 78-79
OSCAR 13 ... 104
oscillator circuit ... 74
oscilloscope display ... 20
packet ... 22-24, 26, 41, 60-61, 67, 78, 92
Packet Bulletin Board Systems ... 22-24
packet loss rate ... 61
Packet Radio Handbook, The ... 67
PACSAT ... 78
PANAMSAT ... 104
Phenix, Richard ... 90
phone QRP, SSB, AM ... 67
PIARA ... 92
police band communication ... 9, 104
Portugal ... 90
Programmable Scan ... 27
propagation ... 9, 67, 78, 85, 104
PSK ... 4, 78
QRP Candy Store ... 67
QRPers Basic Propagation Tool Kit ... 67
QSL Management ... 85
Radio Shack 276-1707 and 276-158 ... 20
Radio Shack 277-1008 Audio Amp/Speaker ... 20
Radio Shack 7805 voltage regulator ... 55
Radio Shack LM317 adjustable regulator ... 55
Ramsey D-5100 Multimeter ... 18
reprints, RTTY Loop ... 62
CB to 10 Conversions ... 88
Republic of Koree ... 90-91
ROSE(COSI) ... 61
RS-232 connector ... 60
RS-232 interface ... 27
RS-232 port ... 26
RS-232C ... 40-41
RTTY DXing ... 85
RTTY ... 20, 62, 78, 85, 98
RTTY.BAS ... 62
RTTY.BIN ... 62
RTTY.EXE ... 62
RUDAK ... 78
S.P.A.M. ... 67
school program ... 14-15
senior program ... 9, 104
SI8MI ... 92
SK8MT ... 92
SM-8/10 microphones ... 27
SM7DSE, Kent ... 92
Small claims ... 32
Smartfax recorder ... 72
SM0AGD Erik ... 91
SM0COP, Rune Wande ... 91-92
SO-239 ... 27
speech processor ... 27
SSTV ... 26
SWEDARP ... 92
Sweden ... 91-92
TCP/IP networking code ... 61
TEC-200 film ... 80
Teletype Corporation ... 62
telegraphy ... 38
Ten-Tec Argosy and Argonaut ... 67
Testlog ... 67
Tex-Net ... 61
Texas Instruments TLC584 ... 54-57
TG9VT ... 85
The Amateur Radio Awards Directory ... 91
TMARC ... 60
TR1–5 NEC 85637 bipolar devices ... 64
TR6 Phillips BLU98 ... 64
Transmit Mixer board ... 64-65
Transpolar Ski Expedition ... 91
Transverters Unlimited ... 65
troubleshooting ... 18
TRS80 Model 100 ... 56
Turbo Pascal ... 57
U.S. GOES ... 70
Universal Permit Application ... 90-91
Universal Local Oscillator ... 64-65
UoSAT ... 29-31, 78-79
VAC 750 wall transformer ... 74
VE3XN, Garry V. Hammond ... 91
video processing ... 70, 72-73
VK2SG ... 85
voice synthesis ... 51-52
VS6CT, Phil Weaver ... 92
VS6DW, MBE, T.C. Chan ... 92
W1XU, Jim Gray ... 76
W4RNL, L.B. Cebik ... 11
W5PFG, W. Max Adams ... 40
W6CK, Dr. William Hess ... 38
W8NP ... 67
W9NK, Dan Frank ... 61
WA3FAE, Forrest Hudspeth ... 67
WA9TYU, Dean R. Becker ... 20
WACOM four-cavity duplexer ... 60
WB2MGP, Carole Perry ... 14
WB2NGN, Jim ... 67
WB6RQN, Brian Lloyd ... 60
WB8DQT, Dr. Ralph Taggart ... 70
WB8VGE, Mike Bryce ... 67
WB9RRT, Larry Antonuk ... 16
WD8RCL, R.C. Lukaszewicz ... 32
Weather Satellite Handbook ... 70, 73
WEFAX program ... 62
Wickramasinghe, Chandra ... 45
WSH FAX ... 72
WWV time-code format ... 62, 76
Yaesu FT-727R ... 9
Z21EI, Bernard C. Herring ... 91
Zimbabwe ... 91

*** Super Comshack 64 ***

Programable Repeater Controller/HF & VHF Remotes/Autopatch

Rotor Control/Voice;CTCSS;2 Tone Paging/User Logging/Unlimited Vocabulary

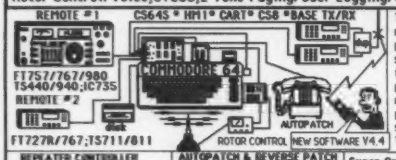

The CS64S is the most advanced control system available at any price. Total control of your ham shack/club station. Each user has individual access codes and privileges granted by the control op. All user's logged to disk &/or printer. Hi/lo priority patch & security/monitor/lock modes. Talking Packet BBS input soon.

REPEATER CONTROLLER
- *Change all variables remotely
- *Synthesized voice adj. pitch/speed
- *Program mail box or select ID tail mess. with touchtones from HT
- *Alarm clock & auto excute mode
- *Macro commands/user logging
- *Individual user access codes
- *Code practice & voice readback
- *Multifunction voice alarm clock

H.F. REMOTE #1
- *20 Macro mem./auto mode sel.
- *Scan up/down sel. rate or step
- *Voice ack. all control commands

AUTOPATCH & REVERSE PATCH
- *1000 (18 digit)tel. #'s stored
- *300 users/CTCSS & 2 tone paging
- *50 enable/disable tel.#'s
- *Individual access privilages
- *Directed/general & reverse page
- *Full or Half duplex (level cont.)
- *Security mode/ TT readback on/off
- *Store MCI/Sprint tel. #'s
- *Reverse Patch active all modes
- *Call waiting/quick dial & reset

V.H.F. REMOTE #2
- *Dual VFO's/ Rev/Split/COR detect
- *Set Scan inc. & offset/var. resume

Super Comshack CS64S $349.95 + $4.00 ship USA; incl. computer interface, disk, cables & manual (simplex version inc. on request)

SYSTEM OPTIONS
- *External Relay Control 3 DPDT relays + 5 open collector outputs..CS-8 $79.95
- *EPROM Auto boot Cartridge customized with your system .....CART $99.95
- *Beam control; speaks bearing and rotates beam ,1 degree incre. HM1 $49.95
- *Manual (Refunded).....MM1 $15.00
- *Row & col. freq. control..RAP $149.95
- *C64 D.C. Switcher P.S. DCPS $119.95

MINI (BEAR CAT) COMPUTER CONTROL FT-727R

Programs and Scans 100 ch. in Ham/General coverage. Converts HI into a powerful **100 ch. scanner** & programs all for field use!

- *Digital "S" meter ; stops scan from S(1-9); Auto resume
- *Loads & programs all FT-727R parameters in less that 15 secs.
- *Includes hardware & disk for C64 or IBM PC

MODEL 727S $39.95

12v C64 SWITCHER
- *Draws 1.1A @12v.
- *70khz 75% efficient
- *Outputs 5v @2 amps and 9 vac 60Hz
- *Crystal time base
- *Plugs into C64 power

MODEL DCPS.....$119.95



Touchtone to RS-232 (300 baud interface)

Program your computer in basic to decode multidigit "strings", sound alarms, observe codes, includes basic program for C64 VIC20/C128, **works on all computers!**

MODEL DAP $89.95

Touchtone 4 Digit Decoder & on/off latch with all 16 Digits

Expandable Repeater on/off control

- *Low power CMOS +5 to +12 Volts
- *User programable **50,000**, 4 digit codes
- *Send code once to turn on, again to turn off
- *Momentary & Latch output drives relay
- *Wrong digit reset; no falsing; 2 to 4 digits
- *Mute speaker audio until call is received
- *LED displays latch state; Optional 4 digit extra custom latch,(7225) IC's $6.95 ea.
- *Model TSD $59.95

"Audio Blaster" IC02/04;2AT;U16;FT209/727;23/73R

Module **installs inside the radio** in 15 Min. Boost audio to **1 watt!** Low standby drain/Corrects low audio/1000's of happy users. Miniature audio amplifier --> Used by Police,fire, Emergency, when it needs to be **HEARD!**

NOW FOR FT78/720 OWNER

MODEL AB1-8 $22.95

MODEL AB1-$19.95

ENGINEERING CONSULTING ** 583 CANDLEWOOD ST. BREA, CA. 92621**

MASTERCARD ** VISA ** CHECK M.O. ** CA. RES. ADD 6% TEL: 714-671-2009**

Look at our MOBILE MARK™ "ON WINDOW" Line

PATENTED



VHF (140-175)
- *No Hole*
- *Easy to Mount*
- *Rugged*
- *Superior Performance*
- *Radiator Snaps On and Off*
- *Competitively Priced*

UHF (420-520)
- *3 db gain*
- *No Hole*
- *Easy to Mount*
- *Rugged*
- *Superior Performance*
- *Radiator Snaps On and Off*
- *Competitively Priced*

Cellular/Trunking (800-895 MHz)



- *3db Gain*
- *No Hole*
- *Easy to Mount*
- *Rugged - Goes through Car Wash Without Removal*
- *Superior Performance*
- *Broad Bandwidth*
- *Small Size*
- *Competitively Priced*

MOBILE MARK, INC COMMUNICATIONS ANTENNAS

3900-B River Road
Schiller Park, IL 60176
312-671-6690

brings imagination and innovation to antennas ..... and has been since 1948 !!

CIRCLE 163 ON READER SERVICE CARD

Info-Tech RTTY Sale!

The Info-Tech M-6000 is the most powerful RTTY decoder you can buy. Simply connect to your receiver's audio output and add a video monitor to experience the exciting world of advanced RTTY monitoring. Too many features and modes to list here. Write for a free spec sheet and a free pamphlet titled: *Listening to RTTY on Your Shortwave Radio.* Reg. $849.95 **On Sale $50 Off. Only $799.95**

Info-Tech FAX Sale!

The Info-Tech M-800 is the inexpensive way to receive high resolution facsimile prints on your compatible plain-paper dot matrix printer. There are many FAX stations on SW and satellites transmitting maps, weather information, marine charts and press photos. Write for a free spec sheet, list of compatible printers and a free pamphlet titled: *Receiving Facsimile on Your Shortwave Radio.*

Reg. $349.00 **On Sale $50 Off. Only $299.00**

Universal Radio
1280 Aida Dr. Dept. 73
Reynoldsburg, OH 43068
Toll Free: 800 431-3939
In Ohio: 614 866-4267

Please add $8.00 for UPS shipping. Visa, Mastercard, Discover and checks accepted. New 70 page SWL catalog sent with each order or $1.00 without order.

DOCKING BOOSTER

Converts Your HT to a Powerful Mobile Unit

•Icom
•Kenwood
•Yaesu

NEW! DUAL BANDER FOR FT727

NAVAL ELECTRONICS, INC.
5417 Jetview Circle • Tampa, FL 33614
Phone: 813-885-6091 • Telex: 289-237 (NAVL UR)

CIRCLE 151 ON READER SERVICE CARD

Number 29 on your Feedback card

BARTER 'N' BUY

QSLs TO ORDER. Variety of styles, colors, card stock. W4BPD QSLs, PO Drawer DX, Cordova SC 29039. BNB260

THE DX'ERS MAGAZINE Up-to-date, informative, interesting. Compiled and edited by Gus Browning W4BPD, DX-CC Honor Roll Certificate 2–4. Send for *free* sample and subscription information today. PO Drawer DX, Cordova SC 29039. BNB261

QSL CARDS–Look good with top quality printing. Choose standard designs or fully customized cards. Better cards mean more returns to you. Free brochure, samples. Stamps appreciated. Chester QSLs, Dept A. 310 Commercial, Emporia KS 66801. BNB434

LEARN CODE on your IBM-PC (or compatible) or Commodore C64/128. CODE-PRO takes you from no knowledge to proficient copy. $10 plus $2 S&H. Specify computer and IBM disk size. TRIO TECHNOLOGY, Dept. 861, PO Box 402, Palm Bay FL 32906. BNB490

POST CARD QSL KIT Converts post cards, photos to QSLs! Stamp brings circular K-K Labels, PO Box 412, Troy NY 12181-0412. BNB498

COMMODORE REPAIRS We are the largest Authorized Service Center in the country and we repair your Commodore computer within days. (Our prices are low; eg. C64-$39.95 complete)... COMMODORE/AMIGA CHIPS. Authorized Distributor, Factory Fresh. #6510/6526-$9.95, #6581-$12.85, #6567-$14.75, #8701-$7.25, PLA/82S100-$12.95, 901 ROMS - $10.95, Amiga chips, and many others. Ask about quantity discount. (WE SHIP WORLDWIDE)... "THE COMMODORE DIAGNOSTICIAN", an invaluable double sided laminated guide for fixing your C64/1541 drive. It diagnoses 72 variables and tells you what chips are faulty. $6.95 plus $1 shipping... VISA/MC... Kasara Microsystems, Inc., 38 Murray Hill Drive, Spring Valley NY 10977, Call Toll Free 1-800-248-2983 (Nationwide) or 914-356-3131. BNB529

WRITTEN EXAMS SUPEREASY. Memory aids from psychologist/engineer cut studytime 50%. Novice, Tech, Gen: $5 each. Advanced, Extra: $10 each. Moneyback guarantee. Bahr, Dept. 73-4, 2549 Temple, Palmbay FL 32905. BNB531

SB-220 OWNERS!—Enhance performance—add new features. 11 step-by-step mods which include: tuned-input 6- and 160-meter operation, heavy-duty power supply mods, full QSK operation, solid-state bias control, and many more. Source of parts included. One time 50% rebate for new mods submitted and two free updates. 10 pages of tech info on the 3-500Z. Order today—$10 per copy plus $1 postage. SASE for info. Bob Kozlarek WA2SQQ, 69 Memorial Place, Elmwood Park NJ 07407. BNB581

MARCO: Medical Amateur Radio Council, operates daily and Sunday nets. Medically oriented amateurs (physicians, dentists, veterinarians, nurses, therapists, etc.) invited to join. For information, write MARCO, Box 73's, Acme, PA 15610. BNB612

WANTED: EQUIPMENT AND RELATED ITEMS. THE RADIO CLUB OF JUNIOR HIGH SCHOOL 22 NYC, INC., is a non-profit organization, granted 501(c)(3) status by the IRS, incorporated under the laws of the State of New York with the goal of using the theme of Ham Radio to further and enhance the education of young people. Your property donation would be greatly appreciated and ackowledged with a receipt for your tax deductible contribution. Please contact WB2JKJ using the callbook or telephone 516-674-4072, 24 hours, seven days a week. Thank you! BNB621

SUPERFAST MORSE CODE SUPEREASY Subliminal cassette. $10. LEARN MORSE CODE IN 1 HOUR. Amazing new supereasy technique. $10. Both $17. Moneyback guarantee. Free catalog: SASE. Bahr, Dept 73-4, 2549 Temple, Palmbay FL 32905. BNB624

HOMEBREW PROJECTS LISTS and radio magazines index information SASE. WB2EUF, Box 708, East Hampton NY 11937. BNB626

DEAD BATTERY??? NiCds/Inserts/Rebuilding. Pager (1.3V150mAh) $3.75, Cells (all sizes) "Write." Replacement packs: Yaesu FNB2 / Wilson BP4 / Maxon CPO500 $23.95, Santec 142 $21.95, Motorola Rapid/Chg: HT220 Slim/225mAh $31.95, HT220 Omni/450mAh $37.95, GE/RCA/Johnson - Write. Replacement Battery Inserts: ICOM BP2 $17.95. BP3 $16.95, BP5 $23.95, BP7 $30.95, BP8 $30.95, Kenwood: PB24 $19.95, PB25/25H/26 $24.95, Azden 300 $19.95, Tempo: S1/270mAh $21.95, S1,2,4,5,15/450mAh $22.95, Ten-Tec 2991 $24.95. Santec: KTBP $16.95, KTBP2 $21.95, Rebuilding: (Send your pack) Yeasu: FNB3 $34.95, FNB4 $37.95, Standard: BP11 $27.95, Install inserts above: add $3.00. SASE info. In PA add 6%. Add $2 Shipping. CUNARD ASSOCIATES, Dept. 7, R.D.6 Box 104, Bedford PA 15522. BNB628

R-390A RECEIVER PARTS: Info SASE. CPRC-26 military Manpack Radio, 6 meter FM, with antenna, crystal, handset: $22.50, $42.50/pair, $97.50/six. Military-spec TS-352 VoltOhm/Multimeter, leads, manual: $12.50. $4.50/piece shipping, $9 maximum. Baytronics, Box 591, Sandusky OH 44870. BNB649

ROSS $$$$ USED June SPECIALS: KENWOOD TR-9500 $459.90, R-599D and T-599D $549.90, TS-700A $309.90, YAESU YO-901P $379.90 YO-900 $169.90 FP-757HD $199.90, E.T.O. 76 $1299.90 $1295.90 76A/W 3 8874 $1999.90 LOOKING FOR SOMETHING NOT LISTED?? CALL OR WRITE, WE HAVE OVER 300 USED ITEMS in stock. *MENTION AD.* Prices cash, F.O.B. Preston. We close at 2:00 Saturdays and Mondays. ROSS DISTRIBUTING COMPANY, 78 South State, Preston ID 83263 208-852-0830 P.O. Box 234. BNB654

"HAMLOG" COMPUTER PROGRAMS 17 modules. Full features. Auto-logs, 7-band WAS/DXXCC. Apple $19.95. IBM, Kaypro, Tandy, C-128 $24.95. KA1AWH, PB 2015, Peabody MA 01960. BNB666

K1BV DX AWARDS DIRECTORY. Complete rules for over 830 certificates, 99 countries. 200 pages. $14.60 Postpaid. Ted Melinosky, 525 Foster St., South Windsor CT 06074-2936. BNB672

QSLs & RUBBER STAMPS - TOP QUALITY! States, World Maps, USA, Key, Shuttle, Globe QSLs. Report Form Rubber Stamps. More! Samples $1. (Refundable With Order). Ebbert Graphics D-7, Box 70, Westerville OH 43081 BNB675

SOLDERING STATION and TOOLS European and American. Free catalog. Robert W. Mink Import-Export, Box 6437S, Fair Haven NJ 07704. 201-758-8388. BNB682

CHASSIS AND CABINET KITS SASE; K3IWK, 5120 Harmony Grove Road, Dover PA 17315. BNB698

CALL SIGN BADGES: Custom license plate holders. Personal, distinctive. Club discounts. SASE. WB3GND, Box 750, Clinton MD 20735. 301-248-7302. BNB699

WANTED: Military radios and related equipment circa WWII. Collections or single items. KA1GON, 617-396-9354 or write, 501 Mystic Valley Pkwy., Medford MA 02155. BNB700

QUALITY QSL CARDS and rubber stamps. Send 39¢ postage or SASE for samples. New stock designs or custom cards from your black ink artwork. Sandollar Press, P.O. Box 30726, Santa Barbara CA 93130. BNB706

ROSS $$$$ NEW SPECIALS: KENWOOD TS-140S $799.90, TS-440SWAT $1199.90, TW-4100A $499.90, TM-2530A $394.90, AEA PK-64A/WHFM $199.90, MP-64 $99.90, MP-20 $79.90, ICOM IC-37A $409.90, IC-471A/W AG-1 $759.90, IC-471H/W AG-35 $969.90, IC-3200A $529.90, 04AT $349.90, IC-290H $496.90, YAESU FT-270RH $309.90, FT-726R $769.90, FT-736R $1499.90. All L.T.O. (LIMTED TIME OFFER) LOOKING FOR SOMETHING NOT LISTED?? CALL OR WRITE. Over 8780 ham-related items in stock for immediate shipment. *Mention ad.* Prices cash, F.O.B. Preston. We close at 2:00 Saturdays and Mondays. Ross Distributing Co., P.O. Box 234, 78 South State, Preston ID 83263. 208-852-0830. BNB709

Barter 'N' Buy advertising must pertain to ham radio products or services.

☐ **Individual (noncommercial)..... 25¢ per word**
☐ **Commercial ..... 60¢ per word**

Prepayment required. *Count only the words in the text. Your address is free. 73* cannot verify advertising claims and cannot be held responsible for claims made by the advertiser. Liability will be limited to making any necessary corrections in the next available issue. Please print clearly or type (double-spaced).

No discounts or commissions are available. Copy must be received in Peterborough by the first of the second month preceding the cover date. Make checks payable to *73* Magazine and send to:

Hope Currier
Barter 'N' Buy
***73* Magazine**
WGE Center
Peterborough NH 03458

WANTED: Sony 330K (with tape recorder), 320K (without tape recorder) and Sony CRF1 receivers. Please call Mathew Wolf at 713-871-9000.
BNB710

MAJOR BRAND HAM EQUIPMENT Butternut, Hustler, Larsen, MFJ, Mobile-Mark and much more. For information call Key Communications ETC. Inc., Berwyn IL 312-795-1314. BNB717

1988 NORTH AMERICAN 6 METER REPEATER DIRECTORY and 50 MHz SSB/Beacon Directory now available. 415.00 for both - Postal Money Orders preferred. Harry School KA3B, 1606 South Newkirk Street, Philadelphia PA 19145. BNB721

WANTED: Drake R74 Receiver. Tony Ficarra, 144 Gladstone Ave., Wollongong, NSW AUSTRALIA 2500.
BNB722

PACKET RADIO AMATEUR. Announces a new heavy duty C-64 Commodore replacement power supply especially for the PACKET RADIO AMATEUR. The new higher amperage output will NOW allow for 24-hour continuous "Packet" operation without voltage change or failure which the existing unit can succumb to. This heavy duty power supply also has a heavier heat sink and is an exact physical replacement for the original unit. Over 52% of the Commodore 64 failures can be directly related to the original power supply. $27.95 plus $3 UPS shipping. Kasara Microsystems, Inc., 38 Murray Hill Drive, Spring Valley NY 10977. 1-800-248-2983 (Nationwide) or (914) 356-3131. BNB725

DIGITAL AUTOMATIC DISPLAYS All radios. GRAND SYSTEMS, POB 3377, Dep't A, Blaine, Washington 98230.
BNB728

YEASU FT107M 180W XCVR original carton, never used. Best offer. T. Schrader, 7805 Lakeland Valley Dr., Springfield VA 22153. 703-455-3806.
BNB730

PROFESSIONAL QUALITY DTMF DECODER AND SELECT CALL SYSTEM by Vince Yakamavich AA4MY, see Feb *QST* Magazine for details. Blank board #152-PCB only $17.95. Kit of Parts including board, #152-KIT only $69.95. Assembled and tested board #152-ASY only $99.95. Add $2.50 per order S/H. A & A Engineering, 2521 W. LaPalma, Unit K, Anaheim CA 92801. 714-952-2114. BNB732

LABORATORY Equipment, Electronic Test Equipment, Components, Unusual items. Industrial and Government Surplus and priced Cheap! Send 50 cents for catalog to: Lehman Scientific Equipment, R.D. 1, Box 580, Wrightsville PA 17368. BNB734

HAM TRADER YELLOW SHEETS. In our 27th year. Buy, Swap, Sell ham radio gear. Published twice a month. Ads quickly circulate–no long wait for results. Send #10 SASE for sample copy. $13 for one year (24 issues). P.O.B. 2057, Glen Ellyn, IL 60138-2057. BNB741

DAIWA MT20A HANDHELD 2m transceiver and accessories wanted. LA 20 "booster," battery cases, etc., also need Eastman 35mm "dayload" developing tank. G. Rose, 524 N. Quaker Lane, Alexandria VA 22304; 703-370-1880. BNB742

B & K 1570 AP SCOPE W/4 probes 80 MHz- 4 trace - used 20 hrs, has warrenty card $1000 O.B.O. James Krueger, Rt 1, Box 364, Seguin TX 78155.
BNB743

E-Z CODE Complete novice code course on 90 minute tape by master instructor $8 postpaid. Practice tapes at most speeds from 5 to 20 wpm $7 postpaid. E-Z CODE, Box 29013, Atlanta GA 30359. BNB744

WANTED: Hallicrafters SR-150 or SR-160 with power supply. State condition and best price. WA2AFD, 2579 Putnam St., Schenectady NY 12304.
BNB745

FOR SALE 2-Azden PCS-5000, 2m-FM Mobile Radios. New in sealed factory boxes w/factory warr. $300 each plus shipping. Call 313-422-4873, Harold KA8-ZXE. BNB746

PHOTOVOLTAIC PANELS Lowest price on Sovonics, Arco panels. From 1 watt to 50. Send $1 for price specs and data sheets. Michael Bryce, 2225 Mayflower, Massillon OH 44646.
BNB747

BACK ISSUES *73, Kilobaud, Microcomputing, Byte, Popular Electronics, Radio-Electronis, Interface.* Send preference, SASE to Bill Rossman, 632 Wetmore, Everett WA 98201. BNB748

ATTENTION HAMS!

SUCTION CUP MOUNT VAK-TENNA!
Only **$29.**[95]

IDEAL FOR APARTMENTS OR OFFICES!

Mount this antenna to your window for the BEST coverage. Two VERY powerful suction cups hold firmly for weeks. Whips telescope to 79" yet fold to only 12". **This antenna is a MUST for people who travel!** Receives 30-500 MHz or transmit 70-230 MHz with up to 50 watts! Complete with 15' of RG58 coax and choice of PL259, BNC, Motorola or F connector (specify connector when ordering).

Kathy Sez: "These products are A-OK!"

SIGNAL INTENSIFIERS
Priced from **$29.**[95]

A HEARING AID FOR YOUR RECEIVER OR SCANNER!

- The State of the Art in WIDEBAND preamps!
- Make small antennas perform like BIG ones!
- Fully Assembled and BUILT TO LAST!
- 110 VAC or 12 VDC powered!
- VHF/UHF or MF/HF available!
- Many models! Send for specs!

Ultimate Mobile Speaker
Only **$29.**[95]

MOUNTS TO GLASS WITH SUCTION CUPS!



Finally a speaker you can put where YOU want it! Place it near your ear for fine armchair copy, even in your car! Specially designed suction cups hold for weeks yet remove easily for storage. Complete with 5' cable and either Mini or Sub-Mini plug (specify when ordering).

Add $3 Shipping/Handling. NY add 7.5% Sales Tax.

EPI ELECTRON PROCESSING, INC
P.O. BOX 708
MEDFORD, NY 11763
(516) 764-9798

SEND FOR MORE DETAILS! US MADE!

SATISFACTION GUARANTEED!
Order any product (except software) from EPI and if not satisfied return it within 15 days for a full refund (less shipping/handling).

CIRCLE 291 ON READER SERVICE CARD

NEW FROM GLB

GLB NETLINK 220
HIGH-SPEED DATA TRANSCEIVER

GLB Electronics is pleased to announce a fast digital-in, digital-out data radio, intended to further the development of the international amateur packet network.

Netlink radios are specifically intended for use in remote, unattended applications for long term service. Compatible with any digital format, they turn around (transmit to receive and receive to transmit) in less than a millisecond while holding keying transients within the channel. A digital sampling AFC tracks transmitted signals in frequency to maintain low error rates over long periods of time. In addition, they utilize crystal ovens and temperature-compensated circuitry for reliable operation at unheated sites.

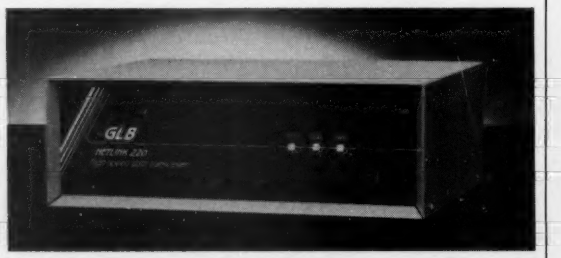

FEATURES:
Conservative design
Data-transparent operation
Digital sampling AFC
5 Helical resonator front end
High-speed squelch supplies DCD
Oven-controlled oscillators
PTT, DCD, & PWR LEDS
PIN diode antenna switching
Transmitter timeout timer
Compatible with TNC2 controllers
Complies with all applicable Sections of Part 15 FCC Rules.

SPECIFICATIONS:
Data rate: 0 - 19,200 baud
Data format: any format incl. NRZ and NRZI
Modulation: FSK
Signal levels: TTL or RS232C
Frequency: 220 to 225 Mhz
Rx bandwidth: 30 Khz
Turnaround time: 1 ms TX, 1 ms RX
Power output: 2 W min
Fuse: 3 Amp

Digital sensitivity: 5 uv for 1 error/K
Squelch response time: 1 ms
Spurious output: -60 dbc max
Power: 12 VDC
Operating temperature range: -30 to +60 degrees C
Antenna connector: BNC
RS232 connector: DB25S
Dimensions: 12 × 10 × 4 in.
Weight: 5 lbs. 8 oz.

Request our FREE catalog.
Contact GLB for additional info and available options.
We offer a complete line of transmitters and receivers strips, preselector preamps, CW/Diders & synthesizers for amateur & commercial use.

See us at DAYTON Booth 318

Amateur net $ 699.95
List price $ 799.95
MC & Visa welcome.

GLB ELECTRONICS, INC.
151 Commerce Pkwy.
Buffalo, NY 14224
716 675-6740 9 to 4

CIRCLE 17 ON READER SERVICE CARD

Dx

Hams Around the World

John TG9VT operates a "no-beacon" mailbox on 14085.625 kHz mark frequency at 74 baud. Access GUATMAIL in the daytime. At night, he's on AMTOR on 14073.500 kHz, with selcal TGVT. He runs an ICOM 751 to an Alpha 78 no-tune amp, feeding a 4-element quad.

Chod Harris VP2ML
PO Box 4881
Santa Rosa CA 95402

RTTY DXing

The recent RTTY equipment revolution has dramatically improved the sport of RTTY DXing. Once the neglected stepchild of DX, RTTY DXing is rapidly entering the main stream of the pursuit of new countries.

With the replacement of the noisy, troublesome Model 19 by silent, smoothly-operating electronics, many more amateurs have joined the digital DX crowd, including many stations in other countries.

An important benefit of the shift to electronics has been the addition of RTTY gear to major DXpeditions. Clipperton FO0, Peter I 3Y1, and Howland Island KH1 are just a few of the many DXpeditions that packed RTTY gear as well as SSB and CW equipment.

The portability of modern RTTY gear has also led to a new phenomenon: the RTTY mini-DXpedition. Many countries, especially in the Caribbean, had seen little or no RTTY activity until a few short years ago. Now vacationers heading for some sun can pack some RTTY gear along with their portable transceivers, and generate some fierce digital pile-ups from their seaside QTH.

The increasing popularity of RTTY contests, especially the new CQWW RTTY test at the end of September, has prompted contest DXpeditions, such as the HD8DX digital trip to the Galapagos Islands in 1987. These DXpeditions greatly increase the number of countries available on the digital modes.

Getting Started

RTTY DXing shares many aspects with CW and SSB DXing. A DXer needs a station of at least average capabilities, better if possible, including a good rig and antenna farm. It is more difficult to copy ("print") weak stations on RTTY than on SSB or CW, so a good station proves more important in digital DXing than in other modes. Ideally, the rig should be very stable, as even a slight frequency change can garble transmissions. The ability to use a narrow CW filter while in the lower sideband mode is another DXing advantage. The rig should also be capable of continuous transmissions for extended periods. RTTY demands a great deal of stamina from a rig and its power supply.

RTTY DXers will probably want an amplifier, for the reasons given above. Again, continuous duty is a requirement, so amps with marginal power supplies may not be up to the task. The Drake L4B, Henry 2K, and Alpha amps are good choices.

There's a wide choice of computer and dedicated RTTY gear. I use a simple Commodore C-64, and AEA Pakratt PK-64 with HF modem, for example. In any case, read the instructions carefully, and master the CQ keys, callsign insertion, receive and transmit buffers, and all the other features of the equipment before trying to chase rare DX.

The single most important piece of equipment in RTTY DXing is exactly the same as that in other DXing: your ear. DXing is at least 90% listening (or watching). Almost all HF RTTY contacts occur in very limited band segments, with 14075–14100 kHz being the most popular. With increasing sunspots, check out the corresponding band segments on 10 and 15 meters, as well as the low band spot DX frequencies of 3590 and 7040 kHz. RTTY is permitted on the new WARC bands: tune around 10145, 18105, and 24925 kHz.

Beginning RTTY DXers will make the most headway toward digital DXCC by scanning 14075–14100 kHz on a regular basis. In addition to listening for DX signals, the DXer should also print QSOs from some of the better known, more active DXers on the band. JA1ACB, TG9VT, VK2SG, W3KV, and KT1N are good stations to copy, as they are usually informed about current RTTY DX activities.

The print publications contain useful RTTY DX information as well. The *RTTY Journal* includes a DX column by KT1N with lots of DX activity reports. And the weekly DX newsletters often have RTTY reports.

Don't neglect the rest of the band while concentrating on the RTTY segment. By listening to signals on the rest of 20 meters, for example, a DXer can get an idea of the propagation paths and band openings. Many rare RTTY DX stations dislike pile-ups, and tend to answer CQs. So when the band is open to that particular part of the world, a directional CQ might put a new country in the RTTY log.

As with any DXing, keep the calls short and to the point. Avoid sending strings of RYs or repeating the DX station's callsign. Try "1 x 5" calls—the DX station's call once, followed by yours five times. And listen, listen.

RTTY DXing offers one feature not found on the other modes: It is entirely possible to have a valid contact with a station when no operator is present! Some DX stations maintain automatic "mailbox" stations and message centers. These stations will log a call and respond to it without need of an operator. A DX RTTYer can confirm TG9VT when John is not in the shack. Many of these RTTY bulletin boards can provide DX information, as well as lists of other such automatic stations. VK2AGE on 14073 kHz AMTOR has a weekly DX bulletin compiled by VK2SG, for example.

The RTTY DXer will also want to make good use of RTTY contests, especially the British Amateur Radio Teleprinting Group (BARTG) spring test, and the CQWW RTTY fall activity. The relaxed pace of the RTTY contests is a refreshing change from the feeding frenzy of SSB tests, but there's still plenty of excitement available for the digital DXer. Be sure to check out the rules and the scoring systems. (I'm still trying to figure out my BARTG score.)

The rapid increase in sunspots and the increasing availability of RTTY gear and stations means digital DXing will be great in the next few years. Why not give it a try? See you on the bands. ■

LA5HE's Commandments for QSL Managers

1. By accepting to act as a DX-station QSL manager, the volunteer assumes the responsibility to ensure that everybody who wants a card gets it in one way or another.
2. All cards received must be checked against the log copies received from the DX station, and a QSL card should be made out immediately and returned via the QSL bureau.
3. One of the services of a national society is to provide a QSL bureau for its members. The volunteer should maintain the membership of his national society (IARU member) to ensure proper receipt of QSLs via the bureau.
4. The volunteer should always make sure that the society's bureau is aware of the fact that he is handling QSLs for a station in a difficult part of the world, to ensure smooth cooperation from all parties concerned in his own country.
5. If the national QSL bureau is not automatically accepting QSLs for, or on behalf of, overseas DX stations, the volunteer should take the necessary actions to obtain acceptance before undertaking the responsibility to act as someone's QSL manager. This is very important, as the bulk of the world's QSL cards are sent via the bureau.
6. For prompter handling of QSL cards, many avid DXers are prepared to pay postage plus the service of a direct QSL card by air or surface mail. If the volunteer is prepared to provide this service, he should make sure that this information is provided by the DX station, as well as being published in the various DX news bulletins and Ham magazines. A good idea is to advise how many IRCs (International Reply Coupons) are required for air mail within the volunteer's own continent and the rest of the world, as one IRC covers surface postage only. He should make it known also if SASEs (Self Addressed Stamped Envelopes) are required.
7. For direct replies, the volunteer should never demand more than needed for actual costs. QSLs managers are expected to do their work out of dedication and pleasure. He should be prepared to accept a small loss, which will be compensated to some extent by those people sending excessive postage. Being a QSL manager, however, is most certainly a non-profit operation.
8. Remember: Being someone's QSL manager is a responsibility—not an ego trip!

Already know the code? Start copying words instead of letters! Time-proven, easy-to-learn methods. Increase skills and speed at the same Time! 3-step program.

START COPYING CW THE EASY WAY!

☐ **The QSO-TRAINER™ Code Course.**
Start copying words the very first day! Ideal, moderate speed. Two 60-min tapes and complete written instructions. $14.95 + S&H.

☐ **The QSO-MASTER™ Practice Tapes.**
The "plateau" buster! 8, 10, 12, & 14 wpm. Two 60-min tapes and complete instructions. $12.95 + S&H.

☐ **The QSO-PRO™ Practice Tapes.**
Go all the way to Extra! 16, 18, 20, & 22 wpm. Two 60-min tapes and complete instructions. $12.95 + S&H.

Order yours today!
Shipping & Handling (S&H): 1 = $2.00; 2 = $3.00; 3 or more = $3.50. IL, IN, MI, MN, OH, WI add sales tax. Send Check, Money Order, Visa, or Master Card to:

AVC INNOVATIONS, INC.• DEPT 7A
P.O. Box 20491 • Indpls, IN 46220-0491

CIRCLE 329 ON READER SERVICE CARD

5-1000 MHz PREAMPLIFIERS

	NF	G	P(1dB)	$
WLA21M	3dB	13dB	8dBm	54
WLA22M	4	11	12	58
WLA23M	4	22	12	83
WLA24M	3	20	18	109

430/50 MHz CONVERTER
RXC431 .15uV 20dB 99

WILAM TECHNOLOGY, Div. of
WI-COMM ELECTRONICS INC.
P.O. Box 5174, MASSENA, N.Y. 13662
(315) 769-8334

CIRCLE 319 ON READER SERVICE CARD

SRC-10 REPEATER/LINK CONTROLLER



DTMF muting
Intelligent ID'er
Auxiliary outputs
Easy to interface
Alarm monitor input
Telemetry response tones
Low power CMOS, 22ma @ 12v
Detailed application manual
Programmable COS polarities
Repeater & link courtesy tones
Synthesized link/remote base capability

$149.00 *Assembled & Tested*

CREATIVE CONTROL PRODUCTS
3185 Binding Avenue
Grand Junction, CO 81504
(303) 434-9405

CIRCLE 306 ON READER SERVICE CARD

CALL SIGN CUPS

YOUR AMATEUR RADIO CALL SIGN ON A DISTINCTIVE 10 OUNCE CERAMIC COFFEE MUG, WITH THE AMERICAN RADIO RELAY LEAGUE (ARRL) LOGO ON THE FLIP SIDE.

LET PEOPLE KNOW THAT YOU ARE PROUD TO BE A MEMBER OF THIS TIME HONORED FRATERNITY

CUPS COST $5.95 EACH, TWO FOR $10.95 PLUS $1.50 SHIPPING.
CUP PAIRS CAN HAVE THE SAME OR DIFFERENT CALL SIGNS.

Send check to:
Call Sign Cups
PO Box 17062
Raleigh, NC 27619

NC Residents add 5%tax
Allow 5 weeks delivery

Send for special club rates.

CIRCLE 344 ON READER SERVICE CARD

AUTHORIZED COMMODORE REPAIR SINCE 1978

C-64 REPAIR

$54.95 Includes All Parts & Labor Plus UPS

COMMODORE CHIPS
At Low Prices

6510	9.95	325572	10.95
6526	9.95	325302	12.95
6567	14.75	8721	12.50
6581	12.85	8520A	17.65
PLA/82S100	12.50	901 ROMS	10.95

AMIGA CHIPS AND MANY OTHERS

☆ *Ask for Quantity Pricing* ☆
Send for Catalog of Parts & Chips

New Heavy Duty (high amperage output) C64 Power Supply designed especially for PACKET RADIO USE. $27.95 plus $3.00 UPS.

"COMMODORE DIAGNOSTICIAN". Fantastic new way to fix your Commodore 64/periph., etc. Over 6,000 sold. An invaluable tool for diagnosing faulty chips and saving lots of money on Commodore repair. Prepaid at $7.95.

PRINT HEADS, R/W Heads for 1541, 801, 02, 03 and other very hard to obtain items

KASARA MICROSYSTEMS, INC.
33 Murray Hill Drive
Spring Valley, NY 10977
(914) 356-3131
(800) 248-2983
PRICES SUBJECT TO CHANGE

CIRCLE 322 ON READER SERVICE CARD

NEMAL ELECTRONICS

•Complete Cable Assembly facilities MIL-STD-45208
•Commercial Accounts welcome- Quantity pricing • Same day shipping most orders
•Factory authorized distributor for Alpha, Amphenol, Belden, Kings, Times Fiber

Call NEMAL for computer cable, CATV cable, Flat cable, semi-rigid cable, telephone cable, crimping tools, D-sub connectors, heat shrink, cable ties, high voltage connectors.

HARDLINE 50 OHM
FXA12 1/2" Aluminum Black Jacket ..... .89/ft
FLC12 1/2" Cablewave conn. copper blk jkt 1.59/ft
FLC7B 7/8" Cablewave conn.copper blk jkt 3.92/ft
NM12CC N conn 1/2" conn copper m/f 25.00
NM7BCC N conn 7/8" conn copper m/f 54.00

COAXIAL CABLES *(per ft)*
1180 BELDEN 9913 very low loss ..... .52
1102 RG8/U 95% shield low loss foam 11ga ..... .36
1110 RG8X 95% shield (mini 8) ..... .17
1130 RG213/U 95% shield mil spec NCV jkt ..... .39
1140 RG214/U dbl silver shld mil spec 1.85
1705 RG142B/U dbl silver shld, teflon ins 1.50
1310 RG217/U 50 ohm 5000 watt dbl shld ..... .98
1450 RG174/U 50 ohm .100" od mil spec ..... .14

ROTOR CABLE-8 CONDUCTOR
8C1622 2-16ga and 6-22ga ..... .21/ft
8C1620 2-16ga and 6-20ga ..... .39/ft

CONNECTORS-MADE IN USA
NE720 Type N plug for Belden 9913 ..... $3.95
NE723 Type N jack for Belden 9913 ..... 4.95
PL259 standard UHF plug for RG8,213 ..... .65
PL259AM Amphenol PL259 ..... .89
PL259TS PL259 teflon ins/silver plated 1.59
PL258AM Amphenol female-female (barrel) 1.45
UG175/UG176 reducer for RG58/59 (specify) ..... .22
UG21DS N plug for RG8,213,214 Silver 3.35
UG83B N jack to PL259 adapter, teflon 6.50
UG146A SO239 to N plug adapter, teflon 6.50
UG255 SO239 to BNC plug adapter, Amphenol 3.29
SO239AM UHF chassis mt receptacle,Amphenol ..... .89

GROUND STRAP-GROUND WIRE
GS38 3/8" tinned copper braid ..... .35/ft
GS12 1/2" tinned copper braid ..... .50/ft
HW08 8ga insulated stranded wire ..... .35/ft
AW14 14ga stranded Antenna wire CCS ..... .14/ft

All prices plus shipping, $3.00 min, Visa/Mastercard $30 min, COD add $3.00
Call or write for complete price list. Nemal's new 36 page CABLE AND CONNECTOR SELECTION GUIDE is available at no charge with orders of $50 or more, or at a cost of $4 with credit against next qualifying order.

NEMAL ELECTRONICS, INC. 12240 NE 14th Ave. N. Miami, FL 33161
(305) 893-3924 Telex 6975377 24hr FAX (305)895-8178

CB-TO-TEN

73 has led the way on CB-to-10 meter conversions. Take advantage of our offer to help you get on 10 meters before the sunspots peak again. It's easy and saves you money!

#	Title	Issue
1	Bandplan and Crystal Info	May 77
2	Conversion Data	May 77
3	Radio Shack TRC-47	Jul 77
4	E.F. Johnson Messenger 123A	Jul 77
5	Hy-Gain 670B	Jul 77
6	Antenna Suggestions	Dec 77
7	Radio Shack Realistic TRC-II	Dec 77
8	The Publicom I	Feb 78
9	How about SSB Conversions?	Jul 78
10	Radio Shack TRC-11 and TRC-74	Aug 78
11	Radio Shack Realistic Mini 23	Sep 78
12	Hy-Range 681A (Hy-Gain)	Sep 78
13	Kraco KCB-2310B	Oct 78
14	Lafayette Telsat SSB-75	Nov 78
15	Radio Shack Realistic TRC-452	Nov 78
16	CB Walkie-Talkie Conversion	Nov 78
17	Sharp Model CB-800A	Jan 79
18	SBE Sidebander III and Pace 123A	Jan 79
19	Midland 13-882C and Other PLL Rigs	May 79
20	Lafayette SSB-75 and SSB-100	Jun 79
21	Royce I-655	Nov 79
22	Johnson Viking 352	Nov 79
23	CB to 10 FM - Part I	Jan 80
24	CB to 10 FM - Part II	Feb 80
25	More Talk Power for the TRC-11	Mar 80
26	Sears RoadTalker 40	Mar 80
27	Penney's SSB Rig	Apr 80
28	The Poly-Paks 40-Channel CB Board	Jun 80
29	The Cobra 132	Jul 80
30	New Life for SSB CB Rigs	Jul 80
31	Double Your Channels in SSB Conversions	Jul 80
32	On Ten FM	Aug 80
33	Put That Hy-Gain CB Board to Use	Sep 80
34	Peaking and Tweaking Hy-Gain Boards	Mar 82
35	CB to CW? (Hy-Gain)	Jul 82
36	Maximum Modulation for CB Conversions	Dec 82
37	Beef Up Your CB-to-CW Conversion	Feb 83
38	Add a Digital Readout to Your CB Conversion	Feb 83

Send $3.00 for the first article and $1.50 each thereafter. Just choose the article numbers and call with a credit card number or send a check or money order to: *CB to Ten, 73 Amateur Radio Magazine, WGE Center, Peterborough NH 03458 (603-525-4201).*

QTH-DX

QTH is AUSTRALIA

Leon Fletcher N6HYK

Amazing Australia

Many nights, there are so many clear signals coming in from VK-land (Australia) that some California hams would say, "VK hardly counts as DX."

Many East Coast hams also find Australia fairly easy to work. Even hams in Europe, who are located the farthest from Australia on this planet, do not include VK in their list of "100 most wanted countries."

But Australia, the world's largest island, is certainly one of the world's most fascinating countries. For starters, it ranks in the top ten nations in a startling 51 features. Some Australians are considered to live with the best physical quality of life and have the most graduates and pupil-to-teacher ratio. Australia has the most new houses built, passenger cars, radio receivers, hospital beds, and airfields per capita. It is also proud of the civil aviation flying distances, advertising expenditures, registered industrial designs, and magazines. And the Australians consume more meat, sugar and rubber per capita than any other country.

Intriguing Contrasts

Within these rankings, reported in *New Book of World Rankings* by George Kurian, there are some intriguing contrasts. For example, Australia has the world's highest literacy rate for both males and females, yet it also tops the world in rates of rape and other sex offenses. Despite Australia's high ranking as seventh on an index called "New Social Progress," it ranks second in the world for juvenile crime.

Even though Australia is considered to be among the top ten nations of the world in having the best physical quality of life, many of its citizens apparently feel a need to escape from that desirable existence by being one of the leading countries for drug-related crimes.

Population Stats

Many Americans know Australia is about the same size as the continental United States. But some people are surprised to learn that Australia's population is less than 16 million, nearly a million fewer people than in Texas!

There are 17,207 hams in Australia, smaller than the ham population of Pennsylvania. Australia has one ham per 916 residents, compared with one ham for every 529 residents in the United States.

Amazingly, one of every four residents in the nation live in Sydney. Sydney is the country's most populated city, with about 3.3 million people. Australia's capital, Canberra, has about 250,000 residents, roughly the same as Rochester, New York, or Fresno, California.

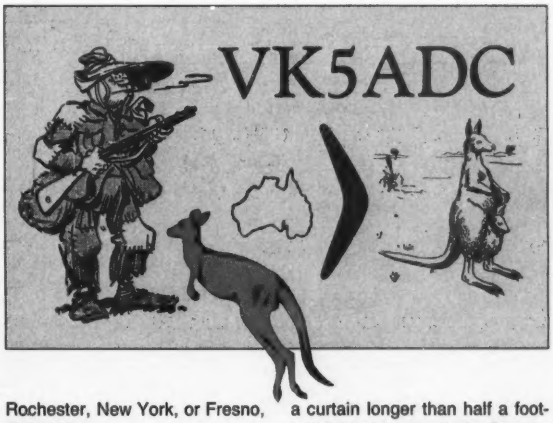

The unusual facts about Australia, some of which were reported in the February 1988 edition *National Geographic,* seem unending. It is the only nation that is a continent. Its largest lake, Eyre, is 3,600 square miles, about 1.5 times as large as Delaware—yet it is bone-dry almost all of the time. Australia has ten times as many sheep as people. It is one of the least densely populated countries in the world with only an average of only five people per square mile. Voting is compulsory. Nearly all of the world's opals come from Australia. And its per-capita income is one of the highest in the world at $11,200 equivalent in US dollars.

Man-made and Natural Wonders

Not statistics, but sights are Australia's major attractions. They range from impressive man-made drama to spectacular wonders of nature.

Pictures of Sydney's unique Opera House show the tops of its curved walls flowing inward to become roofs, uninterrupted by the 90-degree angles. Those walls soar up to 230 feet high, about the height of a 21-story building. The structure is covered with 1,056,000 white tiles made in Sweden. To some people, the building looks like billowing sails of a beautiful ship, to others it looks like a pile of broken eggs.

But the Opera House is much more than its name suggests. Indeed, opera is not even its major production. The structure includes five main performing halls, with the Opera Theater being the second largest in the building. Even though the Opera Theater seats 1,547 people and has a curtain longer than half a football field, the larger is the Concert Hall. The Concert Hall seats 2,690 people. It is used for symphony performances, chamber music, jazz and pop concerts, conventions, and such. The Australians claim the largest mechanical action organ in the world is housed here–10,500 pipes, built at a cost of $1.2 million.

Also located in the Opera House are a Drama Theatre, a Playhouse, and a Recording Hall. Then there are five rehearsal studios, an exhibition hall, two restaurants, six bars, and a library; a total of 900 rooms!

The natural wonders of Australia are indeed diverse. Wildlife includes about 400 native animals, plus about 600 species of birds unique to the country. There are more than 170 marsupials–kangaroos, koalas, wombats and such. The 50 types of kangaroos range from just a few inches tall to over six feet; some of the big "roos" jump 20 feet and race along at 30 miles an hour.

Another impressive wonder of nature in Australia is the world's biggest collection of coral in the world, the Great Barrier Reef. It extends for 1,250 miles along the country's northeast coast, lies about six to 62 miles offshore and ranges from 10 to 150 miles wide.

The reef, along with Australia's many other superior beaches, draw many locals to become almost year-round swimmers, beach loafers, snorkelers, skin divers, shell hunters, and sunworshipers supreme. But such pleasures give Australians the unenviable record of suffering from the world's highest rate of skin cancer.

Another spectacular wonder of nature is Ayers Rock, the largest rock in the world. It is located in the middle of the continent with the nearest town of Alice Springs only 280 miles away. Ayers Rock is 1,143 feet high, 5.5 miles around, set virtually alone in a broad, sandy plain. The rock is open for tourists to climb. The Aborigines call it "Uluru" and consider it a very sacred site since many of their legends center on it.

Australian Aborigines have wandered the continent for at least 40,000 years. Anthropologists estimate that about the time European ships reached Australia, the Aborigine population was more than 300,000. Today there are only about 50,000, plus 150,000 part-Aborigines.

Happy Birthday!

This year, Australia is celebrating it 200th birthday. On January 26, 1788, after an eight-month passage from London, a fleet of eleven ships arrived in what is now Sydney Harbour. The vessels had set sail from London with 776 convicts. Britain had decided to reduce crime by shipping convicts to Australia. That continued for 80 years and by the time such banishment was outlawed, 162,000 criminals had been sent to Australia.

Many outsiders find the strangest feature in all of Australia is the language they speak. It is English but not the brand known to Americans. It's *fair dinkum* (absolutely true) that if you're really *up a gum tree* (in a quandary) for a QSL card from Australia, *give it a burl* (try it) by calling "CQ VK-land"–chances are you'll soon be hearing a *copper* (friend) from Down Under answering, "Goo'dye mite!" 73

73 Advertiser's Product Index

A convenient service for our Readers.

RS#	Company	Page
AMPLIFIERS		
53	Barker and Williamson	63
99	Communications Concepts	71
263	Dentron	49
•	ICOM	Cover II
•	Kenwood	Cover IV,7,8
151	Naval Electronics	82
165	Yaesu	Cover III
111	Yaesu	102
ANTENNAS, TOWERS, CABLE AND ACCESSORIES		
65	AEA	103
89	Antennas West	49
90	Antennas West	99
236	Antennas West	53
302	Antennas West	98
303	Antennas West	58
304	Antennas West	75
53	Barker and Williamson	63
42	Bilal	99
263	Dentron	49
15	Doppler Systems	68
291	Electron Processing	84
72	Glen Martin	17
269	Hustler	2
•	ICOM	Cover II
•	Kenwood	Cover IV,7,8
23	Larsen	100
24	MFJ	3
101	Maxcom	66
163	Mobile Mark	82
	Nemal Electronics	86
29	PX Shack	16
167	Orion Hi-Tech	65
30	QEP	89
115	RF Connection	75
150	Radio Works	58
183	Spectrum International	79
•	Star Circuits	68
38	W9INN Antennas	68
319	Wi-Comm Electronics	86
165	Yaesu	CoverII
111	Yaesu	102
COMPONENTS		
194	All Electronics	63
53	Barker and Williamson	63
320	MAO Electronics	75
252	Midland Technologies	75
•	RF Parts	75
BOOKS, MAGAZINES, QSL CARDS, TAPES, COURSES		
•	ARRL	99
329	AVC Innovations	86
271	Antique Radio Classified	49
11	CTM	77
157	Cleveland Institute	63
97	International Radio	79
339	GGTE	58
296	Nuts and Volts	59
235	N6KW QSL Cards	53
•	Tab Books	71
•	Uncle Wayne's Bookshelf	69
•	W5YI	99
•	73 CB-to-10 Reprints	86
•	73 Dealer Announcement	68
•	73 QSL Cards	50
•	73 Subscription	17
•	73 Subscription Changes	75
REPEATERS, CONTROLLERS, ETC		
1	Advanced Computer Control	97
12	Connect Systems	1
10	Communications Specialists	93
306	Creative Control Products	86
•	Hamtronics	37
•	ICOM	Cover II
47	Maggiore Electronics	77
295	Micro Control Specialties	43
95	S-Comm	68
51	Spectrum Communications	10
TRANSCEIVERS, RECEIVERS		
279	ACE Communications	16
65	AEA	103
•	AXM Inc	49
•	ICOM	Cover II
•	Kenwood	Cover IV,7,8
•	PC Electronics	66
•	RF Parts	75
165	Yaesu	Cover III
111	Yaesu	102
KITS		
194	All Electronics	63
•	Giehl Electronics	75
•	Hamtronics	37
34	Ramsey Electronics	19
POWER SUPPLIES, BATTERIES		
89	Antennas West	49
90	Antennas West	99
236	Antennas West	53
302	Antennas West	98
303	Antennas West	58
304	Antennas West	75
16	Astron	21
•	Control Products Unlimited	16
•	ICOM	Cover II
•	Kenwood	Cover IV,7,8
68	Periphex	53
165	Yaesu	Cover III
111	Yaesu	102
112	E.H. Yost	53
TOOLS, TEST EQUIPMENT		
93	American Reliance	89
342	Digimax	94
•	Kenwood	Cover IV,7,8
24	MFJ	3
34	Ramsey	19
165	Yaesu	Cover III
111	Yaesu	102
KEYERS		
335	Ace Systems	97
24	MFJ	3
MISC ACCESSORIES		
65	AEA	103
321	David Alan Graphics	17
251	Aftronics	17
344	Callsign Cups	86
•	dB Electronics	49
291	Electron Processing	84
•	ICOM	Cover II
97	International Radio	79
322	Kasara Microsystems	86
•	Kenwood	Cover IV,7,8
336	Magnaphase	71
•	Maryland Monogram	58
127	Motron Electronics	18
178	Pacific Cable	68
•	Universal Radio	82
RETAILERS		
•	Amateur Electronic Supply	28
•	Associated Radio	99
41	Barry Electronics	33
92	Burghardt Amateur Radio	43
•	COMB Distributors	39
121	Communications Electronics	25
133	EGE	101
•	Ham Station	50
309	Hamtronics	66
25	Madison Electronics	16
187	Mission Consulting	18
323	National Tower	39
292	Omar Electronics	99
254	Ross Distributing	53
332	Satellite City	53
73	S-F Amateur Radio	71
298	VHF Communications	58
COMPUTER HARDWARE AND SOFTWARE		
338	Ashton	63
343	Commpute	53
80	Compumax	71
103	Dentronics	49
311	Devcom	53
•	Engineering Consulting	82
324	Epsilon	18
249	ExpertQ	53
339	GGTE	58
175	Haltronix	66
322	Kasara Micro Systems	86
153	Morlan Software	75
152	PacComm	94
•	Universal Radio	82
PACKET EQUIPMENT		
65	AEA	103
239	DRSI	59
291	Electron Processing	84
17	GLB Electronics	84
24	MFJ	3
152	PacComm	94
HAMFESTS, CLUBS, AND GATHERINGS		
•	Atlanta Ham Festival	31
341	Peoria Amateur Radio Club	58

FREE INFORMATION
READER SERVICE CARD

Name _____ Call _____

Address _____

City _____ State _____ Zip _____

For faster service call 1-800-722-7790.
In NH, call 1-525-4201.

June 1988—card valid until July 1988. You make the *73* supporting advertisers very happy when you're interested in them . . . Wayne

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100
101	102	103	104	105	106	107	108	109	110
111	112	113	114	115	116	117	118	119	120
121	122	123	124	125	126	127	128	129	130
131	132	133	134	135	136	137	138	139	140
141	142	143	144	145	146	147	148	149	150
151	152	153	154	155	156	157	158	159	160
161	162	163	164	165	166	167	168	169	170
171	172	173	174	175	176	177	178	179	180
181	182	183	184	185	186	187	188	189	190
191	192	193	194	195	196	197	198	199	200

201	202	203	204	205	206	207	208	209	210
211	212	213	214	215	216	217	218	219	220
221	222	223	224	225	226	227	228	229	230
231	232	233	234	235	236	237	238	239	240
241	242	243	244	245	246	247	248	249	250
251	252	253	254	255	256	257	258	259	260
261	262	263	264	265	266	267	268	269	270
271	272	273	274	275	276	277	278	279	280
281	282	283	284	285	286	287	288	289	290
291	292	293	294	295	296	297	298	299	300
301	302	303	304	305	306	307	308	309	310
311	312	313	314	315	316	317	318	319	320
321	322	323	324	325	326	327	328	329	330
331	332	333	334	335	336	337	338	339	340
341	342	343	344	345	346	347	348	349	350
351	352	353	354	355	356	357	358	359	360
361	362	363	364	365	366	367	368	369	370
371	372	373	374	375	376	377	378	379	380
381	382	383	384	385	386	387	388	389	390
391	392	393	394	395	396	397	398	399	400

Reader Service: To receive more information on the products advertised in this issue of *73*, circle the appropriate number. Please allow 6 weeks for processing of inquiry. Offer valid in the U.S. and possessions for a limited time only.

3868R

73 Magazine Product Report Card

Please rate any ham gear you're using from (0) poor to (9) superb.

Manufacturer	Model	Your Rating	When Purchased	Notes
1.				
2.				
3.				
4.				
5.				

Comments: _____

Your name, call, complete address: _____

Please vote on the ad in this issue you found most interesting: _____

Write Reader Service number here.

3868RR

FEEDBACK

The Pitch: *73* wants to know what you want to read. Help us by voting on this month's features and columns—you'll find their numbers in the Feedback box on the page preceding this card.

The Payoff: Each month we'll draw a card at random. If yours is picked, you'll receive a one-year subscription (or extension) to *73*.

Article #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
Great																									
OK																									
No Way																									

Article #	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
Great																									
OK																									
No Way																									

Name _____

Address _____

City _____ State _____ Zip _____

I'd like to see more _____

I'd like to see less _____

3868F

Place
Stamp
Here

73 AMATEUR RADIO

Reader Service Management Department
P.O. Box 326
Dalton, MA 01227-0326

Place
Stamp
Here

73 AMATEUR RADIO

Editorial Office
WGE CENTER
70 Route 202 North
Peterborough, NH 03458-9995

Place
Stamp
Here

73 AMATEUR RADIO

Editorial Office
WGE CENTER
70 RTE. 202 NORTH
PETERBOROUGH, NH 03458-9995

QEP's NOT TOO LATE SALE
Your not too late, copper prices WILL drive up the price of coax even more. Better buy it NOW.

- **BELDEN 9913 low-loss**
  500 ft Roll $200.00 or 42¢/ft.
- **BELDEN 8214 (foam)**
  500 ft Roll $165.00 or 36¢/ft.
- **BELDEN 8267 RG-213**
  500 ft Roll $200.00 or 42¢/ft.

AMPHENOL SPECIALS

PL-259 silver (mica filled)	$1.25
UG-21D 'N' male cable end	2.75
UG-21D 'N' (fitted for 9913)	3.50
UG-23D 'N' female cable end	3.95
UG-29A 'N' Barrel (jack-jack)	4.50
UG-57B 'N' Barrel (plug-plug)	5.20
UG-58A 'N' Chassis receptacle	3.50
UG-83U 'N' Plug to UHF Jack	8.00
UG-146 'N' Jack to UHF Plug	6.95

Copper-clad 14 ga. (7x22)
7¢ a foot (any length)
Identical to Belden 8000

VISA & MASTER CARD ACCEPTED
SHIPPING IS ADDITIONAL
Call TOLL FREE
1-800-USA-9913
in NJ 201-887-6424

110-4 Route 10
East Hanover
N.J. 07936

QEP's

**** SAME DAY SHIPPING ****
TNX JIM N2GKW & BILL KA2QEP

CIRCLE 30 ON READER SERVICE CARD

INTRODUCING
THE AR-100 MAXI-PROBE™
The World's First Pen-Style DMM with Built-In 10MHz Logic Probe

INNOVATION, NOT IMITATION.
The AR-100 Maxi-Probe. Unheard-of features and performance in one small package. Volts. Ohms. Audible continuity. Data Hold. Then add a full-function, TTL/CMOS logic probe. Screw-on accessory tips. Diode Test. Test Leads. And a storage case.
Result: All the functions you need for both analog and digital testing in one small package, at one Low price.
So visit your local ARI distributor and take hold of the future today. The AR-100 Maxi-Probe. All others pale by comparison.

Measure:
•Volts •Ohms •Diodes
•Audible Continuity
And:
TTL & CMOS Logic To 10MHz!
Features:
•Screw-On Accessory Tips
•Data Hold



AMERICAN RELIANCE INC.
VALUE BEYOND MEASURE
9241E. VALLEY BLVD. ROSEMEAD, CA 91770
(800)654-9838

ARI manufactures a complete line of electronic test equipment, including EPROM, EEPROM, and PLD programmers, IC testers, Cable testers, DPMs, DMMs, and Logic testing devices. Call or write today for your free Brochure.

CIRCLE 93 ON READER SERVICE CARD

FEEDBACK

In our continuing effort to present the best in amateur radio features and columns, we've decided to go directly to the source—you, the reader. Articles and columns are assigned feedback numbers, which appear on each article/column and are also listed below. These numbers correspond to those on the feedback card opposite this page. On the card, please check the box which honestly represents your opinion of each article or column.

Do we really read the feedback cards? You bet! The results are tabulated each month, and Larry (our editor in chief) takes a good, hard look at what you do and don't like. To show our appreciation, we'll draw one feedback card each month and award the lucky winner a free one-year subscription (or extension) to *73*. To save some money on stamps, why not fill out the the Product Report card and the Feedback card and put them in an envelope. Toss in a damning or praising letter to the editor while you're at it. You can also enter your QSL in our QSL of the Month contest. All for the low, low price of 25 cents!

Feedback#	Title
1	Welcome, Newcomers
2	Never Say Die
3	QRX
4	Flip-Flop Latch Circuits
5	New York City School Program
6	Review: Ramsey D-5100
7	Digital X-Y Oscilloscope
8	Care And Feeding of PBBS
9	Review: ICOM IC-375A
10	UoSats
11	Buyer Beware
12	Pulsed BiPhase
13	Drifting Along the Telegraph Trail
14	Briefly Speaking: RS-232C
15	Mobile R and D Lab
16	New Products
17	Ham Help
18	Digital Voice Compression
19	Voltage Sampling with a Computer
20	Packet Talk
21	RTTY Loop
22	Above and Beyond
23	QRP
24	Weather Sats
25	Circuits
26	Propagation
27	Hamsats
28	Tech Tips
29	Barter 'n' Buy
30	DX
31	QTH DX
32	Ad Index
33	73 International
34	Special Events
35	Letters
36	Dealer Directory
37	Op Ed
38	Index: 6/88

73 INTERNATIONAL

edited by Richard Phenix

Notes From FN42

Not a week passes here at Wayne Green Enterprises without at least one exotically-stamped envelope arriving, bearing within a request for a free subscription to 73 Amateur Radio. *Many of the requests are made by individuals who have thought to themselves, gosh, they print tens of thousands and probably have hundreds left over. It would cost them only the postage. . . .*

It doesn't work that way, of course. Magazine prices are set to cover all the costs of production and distribution not covered by advertising income. One item of expense: courtesy subscriptions for a limited number of individuals (or organizations) who have earned them in one way or another or whose subscriptions may lead to greater circulation. The magazine industry is, after all, supposed to be profit-making.

In the amateur radio field there is a nonprofit element, however. It can never be preached too often that amateurs have public service responsibilities, and are licensed with the understanding that they will meet their obligations. 73 Amateur Radio, *therefore, does give a number of free subscriptions on behalf of those obligations. It is our hope that amateurs and amateur organizations, particularly in international terms, will also assist hams who, for instance, live in areas or under circumstances where outside help clearly could make the difference between healthy and growing ham activity and perhaps no activity at all.*

Underwriting the cost of a subscription to the amateur radio magazine of your choice is one example of assistance that can be given, and from time to time you will see in these pages, an opportunity to do this. See the Nepal item below. In the case of Nepal, we are sending 9N1MC a one-year subscription.

Dates to remember in June: 1—Children's Day, China, National Day in Tunisia; 2—Anniversary of the Republic, Italy, Coronation Day, Great Britain; 3—Labor Day, Bahamas; 4—Queen's Birthday, New Zealand (on the 11th for Australia and Great Britain); 5—Liberation Day, Seychelles (which celebrates Independence on the 29th); 6—Memorial Day, South Korea, Bank Holiday, Ireland, National Holiday, Sweden (and for Portugal on the 10th, Luxembourg on the 23rd); 7—Independence Day, Norway (12th for the Philippines, 26th for Madagascar and Somalia); 14—Flag Day, USA (20th in Argentina); 17—Commemoration Day, Germany, Republic Day, Iceland; 18—Evacuation Day, Egypt; 19—Revolution Day, Algeria, Father's Day, USA; 22—National Sovereignty Day, Haiti; 24—Peasants Day, Peru, King's Day, Spain; 28—Mothers Day, Central African Republic.

Australia. LATE WORD. EXPO88 plans (see April issue) drastically changed—no ham activity at the site, for example. Double check all information before counting on it.

Roundup

Correction. In the box on page 94, February issue, the two addresses in Portugal should be **REP-Rede dos Emissores Portugueses, Rua D.Pedri V, 4-4 Lisboa, 1000 Portugal** (and the reciprocal license fee is around US$30); and **Direccao dos Servicos Radioelectricos, praca Francisco Sa Carneiro 13, 1, Lisboa, 1000 Portugal.**

China. The China Radio Sport Association (CRSA) of the People's Republic of China (Zhonghua Renmin Gonghe Guo) set up stations BTØLS and BTØZML last March for SSB and CW communications for a very special March-to-May, tri-nation mountaineering party (see QSL cards). The mountain: "the highest in the world—Qomolangma," writes Chang Han Dong. [*Mt. Everest—or Mt. Zhumulangmafeng—Ed.*] Half the mountaineers were to climb the north face, half the south, to meet at the peak and keep going, making the first-ever dual, over-the-peak conquering of Everest's 29,028 feet. ZML was the base camp station, LS was in LaSha (Lhasa), capital of Tibet. May 5th was to be the meeting day at the peak, at which time the Japanese Broadcasting Net planned a telecast via satellite to the whole world. The frequencies allocated for the occasion were 14.180, 14.330, 21.330, 21.180, and 7.080 MHz.

Czechoslovakia. Our Czech correspondent, Rudolf Karaba OK3CMZ, has indicated that no additional information is called for by his country beyond that requested in our draft Universal Permit Application form (for operating permission) as published on p. 78 of our January issue. He proved it by filling one out for himself and sending it to us, with the attachments called for. (We now know he drives a Fiat when mobiling, has grey eyes, and his call suffix, phonetically, is Cyril, Maria, Zuzana!) Thanks!

Israel. Want to learn the international (UN approved) language, Esperanto? Reportedly it can be learned in one-fifth to one-twentieth the time needed for a typical national language. Or, as the Esperantists say, Inteligenta persono lernas la lingvon Esperanto rapide kaj facile. Tune in Naftali 4Z4RM's weekly magazine-on-the-air linked between 40 meters and VHF repeaters in the north and south of Israel, where Rami Shlain 4Z4LX will give you a ten-minute lesson. (See the October 1987 international column for his picture.) It also is taught at the Tel-Aviv Youth Center, the home of the 4X4HQ radio club. There is a 350-plus-member International League of Amateur Radio Esperantists (ILERA) which puts out a quarterly magazine, each issue edited in a different country, and has an annual international contest in Esperanto on the HF bands on the third weekend in November. Last year 162 stations in 22 countries participated. Rami represented Israel at last year's 72nd conference of the Universala Esperanto Asocio (UEA) in Poland where 80 countries were represented, of which 18 had representatives on the Esperanto ham organization.

Republic of Korea (South Korea). Our special Olympic correspondent, HL5AP (see the International column for November, 1987, page 96), wrote a few months ago that he was QRL, following duty with some 30 others as radio men for the Olympic Practice Yacht Regatta in the Bay of Suyong, off Pusan. He will be providing the same kind of volunteer service for the Seoul Olympic Yacht Regatta. Frequencies have been allocated for the Olympics (see box), and we hope to have more details from Byong-joo Cho soon. If you plan to go to Seoul (the Sports Complex and Olympic

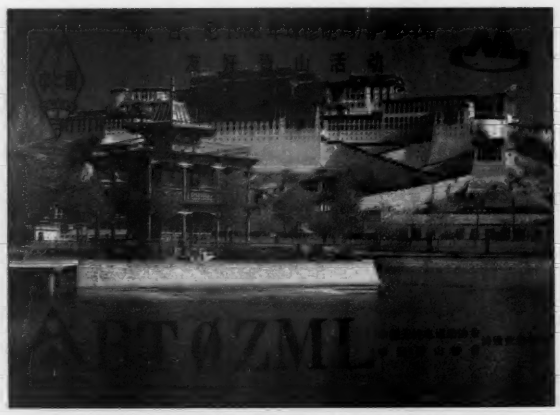

Photo A. Byong-joo Cho HL5AP.

OLYMPICS FREQUENCIES

HF, 50 W, CW, SSB, RTTY: 3500–3550, 3790–3800, 7000–7100, 14,000–14,350 kHz; FM also: 28,000–29,700 kHz.

VHF, 25 W, CW, SSB, RTTY, FM: 50–54, 145-146 MHz; same for UHF, 435.075–440.000 MHz.

Park are 10 miles from the city, just over the Han River) you'd better make arrangements yesterday. A recent report said that there are about 32,000 tourist rooms in Seoul, and 240,000 visitors are expected.

Nepal. Krishna B. Khatry 9N1MC, Chief Engineer for the Nepalese Ministry of Communications, writes that he is "trying [his] best to promote amateur radio in this country." [*To help, we are sending him a courtesy subscription of* 73. *The Kingdom of Nepal (Sri Nepala Sarkar), about the size of North Carolina, has a population of about 17.5 million; Kathmandu, 125,000, is the capital. Virtually closed to the outside world for centuries, it now is linked to India and Pakistan by road and air, and to Tibet by road.—Ed.*] He wrote of the DXpedition license granted to the Japan UNICEF Ham Club of Hokkaido for a ten-day period last December, as part of the celebration of the 43rd birthday of His Majesty, King Birendra Bir Bikram Shah Dev, of Nepal. Station 9N7YDY was operated from Kathmandu. Seven operators were authorized: JA7 BOB and XBG, JA8 OW and RUZ, JH1LKH, JH7WKU, and JN1XWO.

Sweden. The proposed Universal Permit Application looks good to Rune Wande SM0COP and Erik SM0AGD, and they suggest two additions: a place on the form where the applicant can suggest the call he would like to have assigned to him. This can be helpful to some countries where uncertainty is felt about the call to assign. "We have experienced very strange calls in some cases." And: "If there is a host or a contact person in the country one wants to work ham radio from, it [could break] red tape in many cases." [*See Zimbabwe, below, where 8000 km (5000 miles) away, give or take a few hundred, the same bright idea struck. . .*]

Zimbabwe. Bernard C. Herring Z21EI also endorses our Universal Permit Application as proposed. He makes the excellent suggestion [*and see Sweden, above!*] that in some countries the whole matter could be smoother for everybody if the application were made for the use of the gear of a resident amateur and, again in some countries, for that use to be under the supervision of the local ham. This could be made easier yet if a local amateur radio organization endorsed the idea and became the contact point for the prospective visitor looking for a local sponsor. [*A list of such countries can be added to the Universal Permit Application kit if enough national groups agree to sponsor visitor assistance plans. Let us know!*]

Photo B. Nepal's 9N1MC, center, with (L to R) Yasuo Makiyama JA7BOB, Tetsuya Sakabe JA7XBG, Lloyd Colvin W6KG (who operated 9N5QL with W6QL, separately), Masakazu Sezaki JN1XWO, and Toshikazu Kawanishi JA8RUZ.

The CRRL 1988 Polar Bridge Diploma

In honor of the Transpolar Ski Expedition, Severnaya Zemlya, USSR, to Ellesmere Island, NWT, Canada. A bilingual certificate for nine QSOs or loggings between February 15 and June 15, 1988:

- 3 different calls from North West Territories—usually VE8, but the CI8 prefix is optional here
- 3 different calls from Asiatic RSFSR (Russian Soviet Federated Socialist Republic)—usually UA9 or UA0
- 1 Base Camp Station from either Canada or the USSR (CI8C will be heard from the Resolute Bay, NWT Camp)
- 1 station from national capital region of Ottawa
- 1 station from national capital region of Moscow

Send application, certified log data (no QSLs), and 10 IRCs or $5 to me at the above address.

CANADA

Garry V. Hammond VE3XN
5 McLaren Avenue
Listowel, Ontario
Canada N4W 3K1

[*VE3XN is National Awards Manager for the Canadian Radio Relay League, CARF, and the Maple Leaf Radio Society. He has been chasing one aspect of amateur radio after another for 30 years, starting with SWLing and now awards. Over the years he has used over 16 Canadian prefixes, with the most recent being VX3SN (in conjunction with the Calgary Winter Olympics) and VE8XN, for use at the base camp of the Polar Bridge Ski Expedition of UA–VE (see January issue, p. 72). He is QSL manager for himself, HS1AMM, VP2MF, and ZF1MA. His present two-letter call was used by a Canadian pioneer operator, Hobbs Langford. The XN-4 was an early Canadian radio receiver. Nine of his Canadian prefixes were with XN. He publishes* The Amateur Radio Awards Directory of the World, *(a revised edition each year). What would you bet that the kids in the Listowel secondary school district get especially interesting geography lessons? Garry has headed the Geography Department there since 1962.—Ed.*]



FRANCE

Claude Guee FD1DGY
11 Rue Emile Labiche
28100 Dreux
France

[*FD1GY was last heard from two years ago; and that column came two years after the one before "due to a car crash and other QRM," as he put it. Hope all QRM clears up and it won't be 1990 before we hear again—how about more information about the "Gateway" project, and is there any chance that France's process for granting operating licenses to foreign visitors will be simplified?—Ed.*]

Some news from France

- The first "radio-amateur" association in France now has for the first time a YL at its head, Therese Normand FE6EPZ. Let's wish courage and good luck to this valiant YL in any future hard struggles...a new difficulty has arisen which may slow future growth, and already France probably has a smaller rate of amateurs—the cost of a license has gone up, and also the examination charges (practically double from last year, for a beginner).
- 50 MHz could be allowed in France, but with strong restrictions in area and power, due to the use of TV.

• Sandrine FA1MSG is the youngest radio amateur in France (13 the day of her exam)! Her A license doesn't allow many international QSOs, but this is only a beginning!

• This year, our national license is extended to Austria, Liechtenstein, Monaco, Netherlands, Norway, Switzerland, and West Germany, with Belgium possibly next. (With reciprocity, of course.) This may be the beginning of a Europe-wide license, an important step, and maybe even more, why not?

• Packet radio is growing rapidly here. The "hexagone" is now covered by more than 80 repeaters (144,675). Only in the west (the IN square) is there relative inactivity. There are now over 1,000 packetteurs and more than 80 BBS's, on the same frequency. F6ABJ's Paris BBS is also on 145,275 because of heavy activity. The live-wire group ATEPRA (FE6WV, F6ABJ, etc.) has been promoting this new activity.

During the last congress, in Provins, the following standardization was recommended for the SS IDs:

0—operator... 1—BBS... 3—QRV 24/h/24 with operator... 4,5,6—repeater, without operator... 7—portable... 8—portable without operator... 9—mobile, portable... 10–13—reserve... 14—emergency... 15—reserve.

"Gateway" is a very ambitious project by F6ABJ, with an HF station near Paris (7-element beam, 14 MHz, 30 meters ASL) connected with a UHF link to the capital, to make easier intercontinental packet QSOs.

• Chuck AB4Y has left France after a too-short stay here. He was the founder of PIARA, the international amateur radio club in Paris which is so helpful to travelers to Paris. Monthly meetings are held in the famous restaurant, Jenny. Many thanks, Chuck, and *a tres bientot!*

HONG KONG

Phil Weaver VS6CT
10A Bonaventure House
91 Leighton Road
Hong Kong

[*This is Part 2 of a two-part report; Part 1 was in the April issue—Ed.*]

Our Class B licenses continue to expand, and at the end of 1987 we had 373. With 190 Class A, this meant a total of 563, and expansion will continue as exams are now going to be given in Chinese. Until now they have been the same as those given in the U.K. by the City & Guilds of London, in English only.

As 10 meters becomes more active, I am afraid you will be hearing a lot of AM interference from illegal stations in Asia. Hong Kong is not alone in having this problem, where the taxi drivers have discovered a brand new world of communications amongst themselves to the detriment of other amateurs. The two main frequencies they use are 28.405 and 28.515 kHz. The local telecommunications authorities are well aware of the problem and, in conjunction with the police, catch the occasional transgressor, but the problem is endemic, and unless we can get complaints from around the world, there is little more that will be done. The problem exists in Malaysia and Indonesia also, and when the band is open to that part of the world, you will well and truly know about it!

Because of my new job [*in charge of the Port of Hong Kong Communications Center—see Part 1.—Ed.*] I have had to resign from the Committee of HARTS, after seven years, but it was good to leave after an Annual Dinner with 166 people present made it the best ever; and there were over US$7,000 worth of door prizes, thanks to local Kenwood, Waysun, Goodyear, and Pacifica Products dealers!

HARTS had five transceivers stolen from one of its 2-meter sites, and it will be some time before we can collect the money to get back to normal activity. Private repeaters have been authorized recently, and three licenses have been issued. I am sponsoring one, using English, which will be helpful for those unable to understand Cantonese.

Last August, typhoon Rima swept through the Far East, leaving a trail of smoked radios, toasted antennas, fried amplifiers, and disillusioned amateurs in Bangkok, Macau, and the Philippines. Luckily, Hong Kong was spared.

Finally, I regret to announce that our Telecommunications Authority friend, Mr. T.C. Chan VS6DW, MBE, has retired. He has done so much for amateur radio, from the official side, that his shoes may never be filled: his post will not be filled at this time because there is nobody knowledgeable enough. There will be two people splitting up his work load. We understand he is retiring to Canada; and all of us wish him a happy retirement.

SWEDEN

Rune Wande SMØCOP
Frejavagan 10
S–155 00 Nykvarn
Sweden

Common License Approved

The European Common License has been approved in Sweden as of March 1—in part. It is in accordance with the so-called CEPT Recommendation and is valid for amateurs from those other countries which also have implemented this kind of license. It means that amateurs from West Germany, Norway, Denmark, The Netherlands, Luxembourg, Belgium, Austria, Switzerland, France, and Monaco do not need to apply for a visitor's license when in Sweden—IF they are satisfied working only VHF according to CEPT Recommendation Class 2. Unfortunately, the Swedish authorities did not accept the full CEPT plan. The Swedish Telecommunication Authority did accept the full plan, but was overruled by some other government entity. Let us hope that the obstacles, whatever they were, will be cleared away in the near future.

Did you work 7S8AAA? The Swedish Antarctic Research Program (SWEDARP) was assigned the call 7S8AAA, and early this year a group of 12 geology researchers spent a few months in the Antarctic. Kent SM7DSE, a University of Lund professor, was the one who made amateur radio a part of the expedition. He planned to work CW, SSB, RTTY, AMTOR, and HF Packet. They also had a license for 3Y Bouvet, but as of this writing it is uncertain whether they'll get there this time.

QSL cards can be sent via SKØ MT, Club Taby Sandaramatorer. If you didn't work 7S8AAA this time, you will probably get another and bigger chance next year. I'll keep you posted.

Market Reef SI8MI!

SKØMT has become a very active club. They managed to get a special call for the Swedish part of the Baltic Sea rock known to DX-ers as Market Reef (prefix OJØ). For years the Finnish lighthouse on this tiny rock was on the Swedish side, and the national border was drawn through the rock! In 1985 the border was redrawn to put the lighthouse back in Finland (see map). On September 26 of that year SI8MI went on the air for the first time, but for only a few hours because of bad weather, and there are no shelters on the Swedish side. There is a good possibility that the call will be heard again this summer, however. Although it does not have DX-CC status, it is a rare call! QSL via club SKØ.

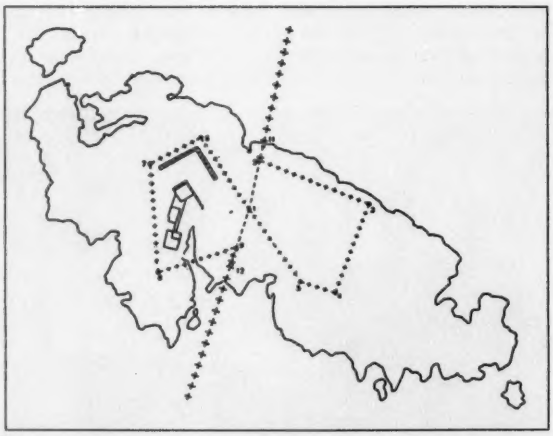

Figure 1. The old border went vertically through the middle of Market reef, which in all is about 400 meters in length and averages about 150 meters wide. The new border cuts left and around the lighthouse, and then cuts back into Finland to give Sweden an area of rock equal to the area that went with the lighthouse.

Food for thought.

Our new Universal Tone Encoder lends its versatility to all tastes. The menu includes all CTCSS, as well as Burst Tones, Touch Tones, and Test Tones. No counter or test equipment required to set frequency-just dial it in. While traveling, use it on your Amateur transceiver to access tone operated systems, or in your service van to check out your customers' repeaters; also, as a piece of test equipment to modulate your Service Monitor or signal generator. It can even operate off an internal nine volt battery, and is available for one day delivery, backed by our one year warranty.

- All tones in Group A and Group B are included.
- Output level flat to within 1.5db over entire range selected.
- Separate level adjust pots and output connections for each tone Group.
- Immune to RF
- Powered by 6-30vdc, unregulated at 8 ma.
- Low impedance, low distortion, adjustable sinewave output, 5v peak-to-peak
- Instant start-up.
- Off position for no tone output.
- Reverse polarity protection built-in.

Group A

67.0 XZ	91.5 ZZ	118.8 2B	156.7 5A
71.9 XA	94.8 ZA	123.0 3Z	162.2 5B
74.4 WA	97.4 ZB	127.3 3A	167.9 6Z
77.0 XB	100.0 1Z	131.8 3B	173.8 6A
79.7 SP	103.5 1A	136.5 4Z	179.9 6B
82.5 YZ	107.2 1B	141.3 4A	186.2 7Z
85.4 YA	110.9 2Z	146.2 4B	192.8 7A
88.5 YB	114.8 2A	151.4 5Z	203.5 M1

- Frequency accuracy, ± .1 Hz maximum - 40°C to + 85°C
- Frequencies to 250 Hz available on special order
- Continuous tone

Group B

TEST-TONES:	TOUCH-TONES:		BURST TONES:			
600	697	1209	1600	1850	2150	2400
1000	770	1336	1650	1900	2200	2450
1500	852	1477	1700	1950	2250	2500
2175	941	1633	1750	2000	2300	2550
2805			1800	2100	2350	

- Frequency accuracy, ± 1 Hz maximum - 40°C to + 85°C
- Tone length approximately 300 ms. May be lengthened, shortened or eliminated by changing value of resistor

Model TE-64 **$79.95**

COMMUNICATIONS SPECIALISTS

426 West Taft Avenue, Orange, California 92667
(800) 854-0547/ California: (714) 998-3021

MasterCard VISA

CIRCLE 10 ON READER SERVICE CARD

TINY-2 PACKET CONTROLLER

$119.95

READY TO USE - NOT A KIT

* USES TNC-2 EPROMS INCLUDING NET/ROM. FIRMWARE VERSION 1.1.5 PROVIDED
* 32K RAM AND 32K EPROM STANDARD
* SUPPORTS BOTH RS-232 AND TTL COMPUTERS, 300-19,200 BAUDS
* EXTRUDED ALUMINUM CABINET WITH OVEN-BAKED WRINKLE FINISH. ONLY 5" x 7"
* WATCHDOG TIMER, MODEM DISCONNECT HEADER, 12V DC OPERATION.

SALE SALE

THE BEST VALUE IN A VHF/HF TNC

PAC-COMM TNC-220 $149.95

WITH TUNING INDICATOR $179.95

- NOW WITH 32K RAM STANDARD, FIRMWARE VERSION 1.1.5
- SELECT EITHER HF OR VHF RADIOS FROM THE KEYBOARD.
- SUPPORTS RS-232 AND TTL COMPUTERS
- IN KIT FORM -- $129.95
- INTERNAL TUNING INDICATOR -- $44.95

PACKET TERMINAL PROGRAMS

DIGIPACK II (PC)	$49.95
MACPACKET (MAC)	$49.95
MACKET (MAC)	$39.95
COMMODORE 64	$19.95

TNC-200, TNC-220 VERSION 1.1.5 EPROMS $10.00

ACCESSORIES:

12v WALL MOUNT POWER SUPPLY $9.95
RS-232 CABLE $9.95, C-64 CABLE $12.95

WRITE OR CALL FOR OUR NEW CATALOG OF PACKET EQUIPMENT, SOFTWARE AND ACCESSORIES.

TOLL FREE
(ORDERS ONLY)
800-223-3511
EXCEPT FLORIDA

VISA MasterCard DISCOVER

PAC-COMM, 3652 West Cypress St., Tampa, FL 33607

FLORIDA ADDRESSES ADD 5%. $3.00 SHIPPING/HANDLING PER ORDER.

TECHNICAL INFORMATION
7:30 AM - 11 PM EASTERN
(813) 874-2980

TELEX: 650-288-1526 MCI
FAX: (813) 872-8696

CIRCLE 152 ON READER SERVICE CARD

ACCURACY **DIGIMAX** PERFORMANCE

DIGIMAX INSTRUMENTS CORP.

CIRCLE 342 ON READER SERVICE CARD

SPECIAL EVENTS

Ham Doings Across the Country

Special Events listings will be provided by 73 magazine free of charge on a space-available basis. Announcements must be received by the first of the month, two months prior to the month in which the event takes place (by April 1, for example, for a June or later event). Please mail to Editorial Offices, 73 Magazine, WGE Center, Peterborough NH 03458. ATTN: Special Events

LONG BRANCH NJ
JUNE 1–5

The Second Annual Convention of Chaverim International, an association of Jewish Amateur Radio operators, will be held this year at the Harbor Island Spa at Long Branch. Cost is $286 per person double occupancy, $436 per person single occupancy. Talk-in on 1 June 147.05 Asbury Park repeater. Deposit of $25 required. For reservations and information, contact *Foster Kawaler NV2W, 46 Megill Circle, Eatontown NJ 07724, or Bernie Schreibman, 362 Meadowbrook Ave., Eatontown NJ 07724.*

ST. PAUL MN
JUNE 3–4

The North Area Repeater Association will sponsor a swapfest and exposition at the state fairgrounds in St. Paul. Exhibits, flea market, dealers, prizes, license exams. $4 in advance, $5 at door. Write *Amateur Fair, PO Box 857, Hopkins MN 55343, or call 612-566-4000.*

BROOKFIELD IL
JUNE 4

The Chicago Suburban Radio Association will operate N9BAT from the Brookfield Zoo as part of the West Suburban Council Boy Scouts of America Scout-O-Rama. Operation will be on SSB frequencies 7.240 MHz, 14.260 MHz, and 28.350 MHz, and 2 meter FM 146.55 MHz. For full color QSL card, send your QSL card and large SASE to *CSRA N9BAT, Special Event, PO Box 88, Lyons IL 60534.*

PITTSBURG KS
JUNE 4

VEC exams, indoor flea market, free tables and parking, hamfest at Lincoln Park Pavilion sponsored by the Pittsburg Repeater Organization. Admission $5 per adult, $1 per additional family member over fifteen. Talk-in on 146.34/.94 or 147.84/.24. Contact *Ken Johnston KCØVZ, PO Box 1303, Pittsburg KS 66762.*

KITCHENER, ONTARIO
JUNE 4

The 14th Annual Central Ontario Amateur Radio Fleamarket, sponsored by the Guelph ARC and the Kitchener-Waterloo ARC, will be held at Bingeman Park. Admission $3, tables $5, children under twelve free. Talk-in KSR 146.37/.97, ZMG 144.61–145.21, Simplex 52/52. Contact *Fleamarket Co-Chairman, Ray Jennings VE3CZE, 61 Ottawa Crescent, Guelph, Ontario CANADA N1E 2A8. 519-822-8342.*

BANGOR ME
JUNE 4

The Pine State Amateur Radio Club is sponsoring their 2nd annual outdoor hamfest at the Hammond Street Campground. Admission $2, overnight camping June 3–5 available. PSARC annual meeting, election of officers, VEC exams, prizes, free swapfest space and more. Talk-in on 146.34/.94. Contact *Gerry Bell N1DQX, RFD 1 Box 1377, Bangor ME 04401. 207-942-3654.*

MADISON OH
JUNE 4–5

The Wireless Institute of Northern Ohio (WINO), sponsored by the Lake County AR Association, will be on the air to commemorate Ohio Wine Month. On June 4 from 2300Z to 0300Z, W.I.N.O will be operating from a local winery on 3860 and 7235 kHz, and on June 5 from 1500Z to 1900Z, they will be on 7235 and 14235 kHz. Call is KO8O. Legal-size SASE for QSL certificate from *KO8O - WINO Weekend, 10418 Briar Hill, Kirtland OH 44094.*

MANASSAS VA
JUNE 5

The Ole Virginia Hams will present the Annual Manassas Hamfest and Computer Show at the Prince William County Fairgrounds from 8 AM to 4 PM. Admission $5, children under twelve free. Tailgating $5/space. YL Program, ARRL booth, CW proficiency awards, dealers, indoor space. Talk-in on 146.37/.97, 146.52. Contact *Joe Schlatter K4FPT, 703-368-8599 (evening) or Randy Moler KA4UFF, 703-791-3061, or write Ole Virginia Hams ARC, PO Box 1255, Manassas VA 22110, or call Jack Gunsett KI4VP, 703-361-5255.*

HUMBOLDT TN
JUNE 5

The Humboldt ARC will sponsor its annual hamfest at Baily Park from 8 AM to 4 PM. Admission $1, refreshments, flea market, and parking for RVs. Talk-in on .37/.97. Contact *Ed Holmes W4IGW, 501 N. 18th Ave., Humboldt TN 38343. 901-784-3490.*

CHELSEA MI
JUNE 5

The 11th Annual Chelsea Swap 'N Shop, sponsored by the Chelsea Communications Club, will be held at the Chelsea Fair Grounds. Donation $2.50 in advance, $3 at door. YLs, XYLs, kids under twelve free. Table space $8, trunk sale space $2. Campgrounds and parking. Call *313-475-1795, Robert Schantz, 416 Wilkinson Street, Chelsea MI 48118.*

SORRENTO LA
JUNE 6–12

The Ascension ARC will hold its Annual Jambalaya Festival from 1500Z to 2359Z daily on 20–15 and 10 meter bands. Special Event package contains three Jambalaya Recipes, Certificate and Club Card with station, state and country worked, plus Honorary Membership Certificate for three or more stations worked. Send $1 postage and QSL card with calls to *A.A.R.C., PO Box 278, Sorrento LA 70778-0278.*

LOVELAND CO
JUNE 10–11

The Northern Colorado ARC is sponsoring the Tenth Annual SUPERFEST at the Larimer County Fairgrounds in the McMillan Building. Prizes, dealers, VEC examinations, refreshments, and a flea market. Station WØINK will be operating on HF with talk-in on 2 meter. Contact *Bud Hayes WØJFN, 3109 N. Douglas, Loveland CO 80537. 303-663-3119.*

MIDLAND MI
JUNE 11

The Central Michigan Amateur Repeater Association (CMARA) is sponsoring its Fourteenth Annual Hamfest at the Midland Community Center. Donation $3 at door, tables $4 and $8. FCC exams, new and used equipment. Contact *David C. Burdeaux WD8DII, CMARA Vice-President, CMARA Hamfest, PO Box 67, Midland MI 48640.*

WINSTON-SALEM NC
JUNE 11

The Forsyth Amateur Radio Club is sponsoring the Winston-Salem Hamfest & Computer Electronics Fair '88 at the Dixie Classic Fair Grounds. FCC exams (preregistration suggested), indoor dealer space, prizes, and flea market/tailgating space. Admission $4 in advance, $5 at door. Talk-in on 146.04/.64. For preregistration (SASE) contact *Dave Ward KA1LVO, 5573 Vienna-Dozier Rd., Pfafftown NC 27040.* For dealer information, contact *Jim Rodgers N1DRI, Box 11234, Winston-Salem NC 27116, 919-760-2493.* For exam information, contact *Bob Gates KJ4IC, Box 60, Cedar Grove Park, Kernersville NC 27284.*

RIO DE JANEIRO BRAZIL
JUNE 11–12

Hundreds of CW operators in South America will be on the bands this weekend. They welcome other hams who wish to meet them for the World Wide South America CW Contest. WWSA is sponsored by *Antenna-Eletronica Popular* with the cooperation of Pica-Pau Carioca and other South American CW groups. *Antenna, PO Box 1131, 20001 Rio de Janeiro, RJ, BRASIL.*

GALESBURG IL
JUNE 11–12

If you would be interested in participating in an International Telegraph Speed contest, and want more details on awards, contact *Jim Woods, The Blackhawk Chapter of the Morse Telgraph Club, RR #4 Box 22, Galesburg IL 61401.*

QUEENS NY
JUNE 12

The Hall of Science ARC Hamfest will be at the New York Hall of Science parking lot, Flushing Meadow Park, 47-01-111 Street in Queens from 9 AM to 3 PM. AR exhibit station, tune-up clinic, films. Donation $3. Sellers $5/space. Talk-in on 144.300 simplex link 223.600 repeat and 445.225 repeat. Contact (evenings) *Steve Greenbaum WB2KDG, 718-898-5599 or Arnie Schiffman WB2YXB, 718-343-0172.*

WINFIELD PA
JUNE 12

The Milton and Central Susquehanna ARCs will host the 15th Annual Central PA Ham and Computer Fest at the Winfield Fireman's Fairgrounds from 0800 to 1700 EST. VEC testing (advance registration), good food, contests, Demo BBS, packet radio, and more. Donations $4, YLs, XYLs, and children are free. Tailgating 6' table for $1. Talk-in on 146.97, 147.18, and 146.52. Call or write *Jerry Williamson WA3SXQ, 10 Old Farm Lane, Milton PA 17847, 717-742-3027 or Bob Stahl KA3PYT, 452 Fourth St., Northumberland PA 17857, 717-473-7050.*

COVINGTON KY
JUNE 12

The Northern Kentucky ARC will hold its HAM-O-RAMA 88 at the Erlanger Kentucky Lions Park. Admission $4 in advance, $5 at gate. Children under fourteen free. Prizes, ARRL, packet and emergency forums, vendors, and a outside flea market ($4/space, tables not provided. Talk-in on 147.855/.255 and 147.975/.375. For advance registration or more information, contact *WA4BRM, c/o NKARC, PO Box 281, Florence KY 41042, 606-371-8545.*

WILLOW SPRINGS IL
JUNE 12

The Six Meter Club of Chicago is sponsoring The Thirty-First Annual Hamfest at Santa Fe Park. Admission $3 in advance, $4 at gate. Prizes, large swapper's row, picnic grounds, displays in pavilion, and an AFMARS meeting. Talk-in K9ONA on 146.52 or K9ONA/R 37–97. Advance tickets and information from *Mike Corbett K9ENZ, 606 South Fenton Ave., Romeoville IL 60441.*

AKRON OH
JUNE 12

The 21st Annual Goodyear Family Hamfest will be at Wingfoot Lake Park near Akron. Family admission is $4 in advance, $5 at gate. Picnic and flea market ($3 per vehicle), and sheltered indoor dealer area ($6 per table, advance reservation suggested). Prizes for the OM, XYL, children, and Mobile Check-in. Park facilities and concessions. For tickets and information, contact *Don W. Rogers WA8SXJ, 161 Hawkins Ave., Akron OH 44313. 216-864-3665.*

SOUTH DARTMOUTH MA
JUNE 12

The Southeastern Massachusetts AR Association is holding its Semara Hamfest from 9 AM to 5 PM. General admission is free. Dealer admission is $8 in advance, $10 at door. VEC exams by appointment, Nepra packet workshop, working HF stations, and Tail Gate Sale. Hamfest talk-in on 147.000/.6 and 145.4900/.6 for backup. Contact (send SASE, please) *Peter M. Kodis N1EXA, PO Box 9187, North Dartmouth MA 02747. 617-993-1828.*

PHILADELPHIA PA
JUNE 15

A technical session featuring recent developments in Amateur Radio will be part of the IEEE International Conference on Communications '88 in Philadelphia. Jim Metzger KA3HWD, will take visiting Amateurs on a tour of the club station where they may use the repeaters (145.25 (KA3HWD/R), 224.52 (K2PM/R), and 443.10 (K3QFP/R) at the Liberty Bell site. For information, write *ICC '88, c/o ATT Network Systems, 1800 John F. Kennedy Blvd., Suite 1300, Philadelphia PA 19103 or call 1-800-ICC-88PH or 215-972-1308 (outside the US), weekdays 8 AM to 4:30 PM EST.*

NEW YORK NY
JUNE 16

The IEEE New York Section Broadcast Technology and Vehicular Technology Chapters are sponsoring "Professional Certifications Programs: An Overview." There will be representatives from the SBE, NABER, NARTE, and possibly the FCC. Admission is free. Time: 6:30 PM at the NYC Technical College, Klitgord Auditorium at 285 Jay St., Brooklyn. For more information, call *Mike Hayden at 212-246-2350, ext. 278, from 9–5 PM.*

HUGO CO
JUNE 17–19

The 13th annual SMIRK Party Contest will be held from 1900 CDT on the 17th to 1900 CDT on the 19th. Exchange callsign, SMIRK # and Grid Square. Crossband contacts, multi-operator or partial contacts not allowed. For scoring, rules, and information on awards, write *Lisa Lowell KAØNNO, PO Box 547, Hugo CO 80821.*

CORTLAND NY
JUNE 18

The Courtland Hamfest, sponsored by the Skyline ARC, will have indoor/outdoor flea markets, prizes, plenty of space and refreshments. Talk-in on 147.225 (+600) or 145.490 (-600). For reservations, contact *Skyline Amateur Radio Club, PO Box 5241, Cortland NY 13045 or call Jerry Falletta KD2DR 607-844-9350, Billy Williams N2AGF 607-749-3766, or Bill Ackroyd WA2UFQ 607-844-4815.*

DUNELLEN NJ
JUNE 18

The Raritan Valley Radio Club will hold its 17th annual Hamfest at Columbia Park. Donation $4, children and spouses free. Seller spots are $6/space or $12/multiple spaces. Prizes and refreshments. Talk-in on club repeater W2QW/R 146.025/.625 and 146.52 simplex. Advance tickets from club members or call *Dave KA2TSM at 201-763-4849, or John WA2C at 201-968-5070.*

PARK RIDGE NJ
JUNE 18

The 3rd annual SWL FEST will be at Gilfer Shortwave, 52 Park Ave., from 10 AM to 3 PM. Free admission. $3 per space for sellers (call early for reservations). Contact *Paul Lannuier N2HIE, PO Box 239, Park Ridge NJ 07656. 201-391-7887.*

MIDDLETOWN MD
JUNE 18

The Frederick ARC will hold its 11th Annual Hamfest at the Frederick County Fairgrounds from 8 AM to 4 PM. Admission $3, tailgaters $2 extra. First table $10/ea, extra tables $5/ea. YLs and children free. For more information, write *Dave Durkovic N3BKD, 7128 Limestone Lane, Middletown MD 21769.*

MONROE MI
JUNE 19

The 1988 Monroe County Radio Communications Association Hamfest will be at the Monroe County Fairgrounds. Tickets are $2 in advance or $3 at gate. Spouses, children free. Table space $6 and trunk sales $2 per space. Simplex talk-in on 146.52 MHz. Local repeaters are W3SOG/R on 146.73 MHz and WA3OHI/R on 147.06 MHz. To reserve space or order tickets, send request with SASE to *Larry Lindner KB8AIZ, 2001 Ida-Maybee Rd., Monroe MI 48161 or call Larry at 313-587-3663.*

ESCONDIDO CA
JUNE 19–25

The Escondido Amateur Radio Society will operate N6WB in conjunction with the 100th anniversary of the City of Escondido. For a large certificate, send QSL and large SASE to *Glenn Bodeker N6WB, 127 Walnut Hills Dr., San Marcos CA 92069.*

REDLANDS CA
JUNE 20–JULY 4

KX6B will operate mobile as part of the support team of Car #73 in the running of the 6th annual Great American Race to commemorate the 80th year since the original New York to Paris race. Operations will be daily 1500 UTC until 2300 UTC on the lower 25 kHz of the 40, 20, and 15 meter general phone band. Some evening operation on 75 meter phone band. Mobile Packet on 145.01 and 2 meter FM on area repeaters. For QSL send SASE to *Dick Raley KX6B, 2610 Camloop Drive, San Jose CA 95130.*

KELLEYS ISLAND OH
JUNE 29

Members of the Ohio Underwater Research Association will operate N8HHG from 1500Z to 0100Z underwater from Lake Erie aboard a shipwreck and other submerged as well as surface locations within the Lake Erie Islands area. Frequencies: 7.230, 14.245, 28.450, and 146.475 MHz (all ± 10 kHz). For photo QSL card, send QSL (SWL letter welcome) and SASE to *Paul Buescher N8HHG, 1752 Stone Creek Lane, Twinsburg OH 44087.*

UNCLE WAYNE'S CODE TAPES

We've had so many phone calls from people wanting our famous 73 code tapes that we've decided to bring them back! *Isn't it about time you dust off that keyer and sharpen up your code skills? Order now...*

"Genesis"

5 wpm–This is the beginning tape, taking you through the 26 letters, 10 numbers and necessary punctuation, complete with practice every step of the way. The ease of learning gives confidence even to the faint of heart.

"The Stickler"

6+ wpm–This is the practice tape for those who survived the 5 wpm tape, and it's also the tape for the Novice and Technician licenses. It is comprised of one solid hour of code. Characters are sent at 13 wpm and spaced at 5 wpm. Code groups are entirely random characters sent in groups of five—definitely not memorizable!

"Back Breaker"

13+ wpm–Code groups again, at a brisk 13+ wpm so you'll be really at ease when you sit down in front of a steely-eyed volunteer examiner who starts sending you plain language at only 13 per. You'll need this extra margin to overcome the sheer panic universal in most test situations. You've come this far, so don't get code shy now!

"Courageous"

20+ wpm–Congratulations! Okay, the challenge of code is what's gotten you this far, so don't quit now. Go for the Extra class license. We send the code faster than 20 per. It's like wearing lead weights on your feet when you run; you'll wonder why the examiner is sending so slowly!

Code Tapes

Genesis	$6.95	_ _ _ _ _ _ _
The Stickler	$6.95	_ _ _ _ _ _ _
Back Breaker	$6.95	_ _ _ _ _ _ _
Courageous	$6.95	_ _ _ _ _ _ _

Postage and Handling $1.00

Name _____ Call _____

Address _____

City _____ State ____ Zip ____

☐ AE ☐ MC ☐ VISA ☐ Check/MO

Card # _____ Exp. Date ____

Mail your order to *73* Magazine,
WGE Center, Peterborough NH 03458

♠ *Ace Systems* ♠
INTRODUCES
THE *Opto Keyer*
OFFERING
► BUILT-IN SPEAKER ► BATTERY OPERATED
► OPTO ISOLATED OUTPUT WITH NO MECHANICAL T/R SWITCHING
► REVERSE POLARITY PROTECTION
► SELF COMPLETING DOTS AND DASHES
► **POWER LOGIC** PROTECTION INDICATES KEYING AND BATTERY STATUS

SPECIAL INTRO: $39.99XX
COD'S ADDITIONAL $2 S&H

OUR WARRANTY IS THE BEST IN THE BUSINESS: All products guaranteed for 1 year with no charge for shipping and repairs during warranty

Ace Systems ♠ (814) 965-5937
RD 1 BOX 83; WILCOX, PA 15870

ALL ORDERS SHIPPED IMMEDIATELY

CIRCLE 335 ON READER SERVICE CARD

"Give your repeater something to celebrate!"

The new RC-96 controller for your repeater will make its day. And yours.

For you, remote programming will let you easily make changes to your repeater from anywhere without a trip to the hill. Change codes, autodial numbers, ID messages and more, with reliable storage in E²PROM memory.

Your users will love the outstanding patch and autodialer, with room for 200 phone numbers. The talking S-meter will let them check their signal strength into the repeater. Plus support for pocket pagers, linking to other repeaters, and a bulletin board.

Your technical crew will appreciate the built-in keypad and indicators. And the ease of hookup through shielded DIN cables. With pots and DIP switches easily accessible at the rear of the unit. They'll be impressed by the gas discharge tube across the phone line and transient supressors on each I/O signal to keep lightning from taking your system down.

And most important, your repeater will have a new sense of pride in being able to serve you better. You'll even hear it in its voice!

Something for everyone. A real party animal!

The RC-96 Repeater Controller – the newest choice from ACC.

acc advanced computer controls, inc.

2356 Walsh Avenue, Santa Clara, California 95051 (408) 727-3330

CIRCLE 1 ON READER SERVICE CARD

LETTERS

From the Ham Sack

Rare Finds

We, the radio amateur, are our own worst enemy. Good quality public relations that the public can understand is rare. This is only part of the problem. I became an amateur in 1971 while at college. There was a sense of discovery—an air of mysticism, of being able to take junk parts from the local radio/TV shop and make them talk around the world. There was a sense of comradeship, of adventure. Over the years we have lost out: We have become appliance operators lacking the ability to build even the simplest equipment. Part of the problem comes from ham radio magazines. They seem to think that since technology has advanced, so have the building abilities of amateurs. Seldom do I find simple, goof-proof projects using 'Radio Shack' parts that are worth any time or effort to build. If *73* magazine could, in addition to or within its current departments include those simple, goof-proof projects for amateurs, it would be providing a service that no one else provides.

Larry G. Sloop WB4UYY
Millers Creek NC

Many of our readers have similar requests, but how many understand we can only publish what writers send to us? Quality projects are few and far between in every US electronics magazine. Get busy, guys!. . . de NA5E

Russian Views

When I decided to visit the USSR, I started to learn some rudiments of Russian. No, I don't know much, but a minimum, just to ask for my way, for prices, comment about the weather, etc. Our guide did not care about me when he saw that I would not make any trouble for him and that I would not get lost. So, when I wanted to find hams, all I had to do was to examine the antennas on the roofs, and ring at the flats where the coax ended. The Q-code with my microknowledge of Russian made the rest. I found lots of helpful friends there. Being quite Vodka-proof, our friendship became even more cordial and I found that at least my friends were not great party fans. They admitted that being a party member helps a lot to get the private ham ticket. They also explained that for hamming they would do even more. Maybe Mr. Gorbatcheff will change the need for such an involvement.

People in the USSR are not easy to access. Their raw behavior shows timidness to strangers. But once the ice is broken, they are friendly, hearty, and handsome. As a foreigner it's up to you to show your interest and good will. Money is no argument for sympathy, in opposition to my experiences in the US.

By the way, do you know why the typical Russian SSB station has its characteristic sheet-iron sound? There is a shortage for all technical components on the privately accessable market. There are no stations to buy, no crystal filters, and no high-tech ICs. So the average station is built from scratch with the available TV repair material, often bought by friends who are thousands of miles away. Several projects have been published in the *Radio* magazine. The best known "19 tube, home built transceiver" is of course always the same model. SSB is made with a balanced multiplier in the 100 kHz region, LC filtered, then mixed up twice. Output power is about 200 watts, using 3 TV line amplifier tubes. How will you expect such a technology to compare to our factory built high-tech transceivers? But at least they build their own stations.

Club stations usually sound better, as they get obsolete marine transceivers which are often older than the operator. Do you really want to criticize these members of the international ham family, just because you had the privilege to be born into an easier world?

Roger A.U. Jung HB9BBR
Switzerland

Having visited 120 countries so far, my interest isn't in remaking them like America as much as seeing them and understanding them. I reported on what I saw and experienced...Wayne

Times Have Changed

I enjoy doing a variety of things within the amateur arena. Sure don't care for the B.S. that clutters up the low bands... sure enjoyed the days when you could get into a good technical conversation with another amateur. I know with the high-tech aspect of equipment these days it requires more study and time, but the rewards are worth it. Of course, the experimenters, innovators and real gentlemen of ham radio are out there, it's just more difficult to find them sometimes.

Bill Tipton W4TAL/NNN0LLX
Navy-Marine Corps MARS
Jacksonville AL

70cm Concern

We have received correspondence from a VE3CAB SAAC News Release alerting us to the fact that the Canadian DOC intends to re-classify a meteorological Clear Air Doppler Radar (CADR). Its present operating area is 404.37 MHz and it will be relocated in the 430–450 MHz 70cm amateur radio UHF band. This system, we understand transmits high-power, triple beam, broadband radar pulses.

We are very concerned about the proposed move to these transmitting devices on our northern boarders as it will almost wipe out and QRM the entire 70cm UHF amateur band. It will also disrupt all present modes of FM, SSB, ATV OSCAR, packet, and EME communications! Likewise, if this system is allowed to relocate without challenge, it is just a matter of time before the US will be pressured to endorse such a relocation as well. This will put the highly used 70cm amateur radio band into serious jeopardy!

What is the reason given for this Canadian move? We feel it is a longer range plot to overtake the 70cm amateur UHF band. We have already lost a vast amount of usable frequency spectrum to the LINE-A restrictions placed upon us. We cannot afford to lose any more!

Mike Stone WB8QCD
USATVS
Editor SPEC-COM

Who Wants the Hot Potato?

The FCC has said that recognized coordinators will decide the right to use a given repeater frequency. Great in theory, but who is the recognized frequency coordinator?

Several questions come to mind.

1. Who picks the coordinator?
2. Who determines who is a coordinator?
3. What are the qualifications to be a coordinator?
4. What other factors are to be considered when determining who is the frequency coordinator?

Some hams have suggested that the ARRL act as the coordinators' coordinator. Their answer: No way. Some have suggested the FCC should take a more active role. Their answer: No personnel, no money, and perhaps no care. Let's throw the names in a hat and have a lottery. Why have rules, tests, or even licenses? If nobody cares let's have a ball and we will have the 11-meter mess again.

I don't see Commission lawyers donating any time to the problem. They want to be paid for their time.

Who is going to coordinate the appointment of the arbitrators? What is to be the arbitrators' qualifications? Will the arbitration be binding? Who will defend the arbitrator if he gets sued? (California, with an arbitration statute gives them immunity, but tell that to a bull-headed amateur.) What about any financial liability? Who is going to develop the forms, rules, procedure, and handle the paper work?

Nice idea but. . . I guess we might do it the Old West way: He who has the highest mountain and the biggest amplifier gets the frequency or maybe we will go back to the old repeater wars.

Oh well, welcome to the new Citizen's Band radio. Uncle Charlie old buddy, you really have a hot potato, with lots of potential law suits. I suggest you "Tell it to the Judge," when you are sued, to enforce Part 97.

Joseph Merdler N6AHU
Atty At Law
Los Angeles CA

QRP Confusion

ARRL recommends 7040 kHz for "RTTY DX" while Mike Bryce, representing *73*, calls 7040 kHz "the QRP calling frequency..." My guess is that this co-use of the frequency is pretty hard on the little guys, viz., QRP'ers.

Frank R. Prina N2DLN
Springville NY

Multiband QRV 160-10 Emergency Pack

Field Day Winner — **Fastest Antenna in the West**

The Emergency Pack contains QRV 160-10 All Band kink-proof weather sealed antenna, Quick Launch kit, 70' RG-8x feedline, 160 meter adapter, all band counterpoise, 200' rotproof line. Complete and QRV. One person installs in 15 minutes.

$139.95 +$10 P.&H. incl 47 page Tech Manual

Info: 56c s.a.s.e.

1971 N. Oak Lane 1300 E. Provo, UT 84604-2138

AntennasWest (801) 374-1084

CIRCLE 90 ON READER SERVICE CARD

★ OMAR ELECTRONICS ★

FOR ALL YOUR AMATEUR NEEDS

SPECIAL PRICES on all

MFJ PRODUCTS ★ A.R.R.L. PUBLICATIONS

and other Ham Radio equipment!

VISA **404-466-3241** MasterCard

OMAR ELECTRONICS • Omar Pupo WA8FON

RTE 1 HIGHWAY 81 SO. • LOGANVILLE, GA 30249

CIRCLE 292 ON READER SERVICE CARD

THE **ISOTRON** ANTENNAS FROM 160–10 METERS

NEW LOCATION

NO TUNERS!
NO RADIALS!
NO RESISTORS!
NO COMPROMISE!

THREE EXCELLENT REVIEWS JUST DON'T HAPPEN BY CHANCE.

CALL US FOR A FREE CATALOG

• See review in Oct 73, 1984 • Sept 73, 1985 • March 73, 1986

BILAL COMPANY

137 Manchester Dr.

Florissant, CO 80816 PH: 719-687-0650

VISA

CIRCLE 42 ON READER SERVICE CARD

HAM RADIO SELF STUDY COURSE

NOW ONLY $19.95 Plus $2.00 shipping & handling

VISA/MasterCard Accepted

Prepare for the fantastic world of amateur radio. Study at your leisure. No technical background required. Entry level amateur radio operators can now talk on the ten meter band and FM repeaters. . .even link their ham radio stations to the public telephone system and personal computers. Privileges never before available to the beginner! Complete FCC license preparation course contains everything you need to know to pass both the written and Morse code examination in a very short time. Written in easy-to-understand language. Contains fully illustrated text book, two long-play code learning cassettes, all 302 word-for-word FCC license test questions, answers. . .and much more! You can't miss! Sold with a 10 day money back guarantee. Phone orders accepted. Dealer and classroom instructor discounts available.

W5YI-VEC P.O. BOX #10101

Dallas, Texas 75207 - Tel: 817-461-6443

ASSOCIATED RADIO

VISA—MC
AMEX—DISC.

8012 CONSER BOX 4327

OVERLAND PARK, KANSAS 66204

(EVERY DAY A HAMFEST)

BUY—SELL—TRADE

ALL BRANDS NEW AND RECONDITIONED

WE'LL BUY YOUR EXTRA RIG STATIONS—ESTATES ETC.

Call 913/381-5900

FAX 913/648-3020

SEND $2 FOR CATALOG AND WHOLESALE LIST

JOIN ARRL

BENEFITS FOR YOU

QST, QSL Bureau, Awards, Low Cost Insurance, Operating Aids, Government Liaison and More—Much More!

MEMBERSHIP APPLICATION

Name _____ Call _____

Street _____

City _____ Prov./State _____ PC/Zip _____

$25 in U.S. $33 elsewhere (U.S. funds) Licensed amateurs, or age 65 or over, upon submitting proof of age, may request the special dues rate of $20 in the U.S. $28 elsewhere, in U.S. funds) Persons age 17 and younger may qualify for special rates, write for application.

For postal purposes, fifty percent of dues is allocated to QST, the balance for membership.

VISA _____ Expires _____

_____ Bank. No. _____ Expires _____

The American Radio Relay League

225 Main St. Newington, CT. 06111 USA

Tone Decoder Notes

I'd like to make the following clarifications regarding my 4+1 DTMF decoder (April issue).

The present circuit may not decode tones if the receiver's volume control is set too high. This problem can be reduced by replacing C1 (0.01µf) with a 1kΩ resistor in series with a 0.01µf capacitor. Also, the brightness of LED can be increased by reducing R1. R1 can be as low as 100Ω, depending upon the LED.

If the Midland Technologies PC board is used, note that R9 is wired clockwise to decrease the speaker on time.

Finally, many people spend too much for tone decoder chips. The SSI-202 sometimes sells for $15 or more. The equivalent chip, the RCA CD22204, is sold by RCA distributers in single lots for $4.50. If local distributors do not stock the CD22204, and the builder does not want to wait 12 weeks for delivery, the chip is available through Circuit Specialists (P.O. Box 3047, Scottsdale, AZ 85257) for about $6.

Andrew Mitz WA3LTJ
Kensington, MD

Down Under No-Code

I would like to point out an error in the *QRX* page in the December 1987 issue (only recently received!). Under the heading of "Aussie Novice 2m Phone?", you incorrectly state that "Australia still has no-code license class." Permit me to point out that Australia has had a no-code license class since about 1959, when the "Limited" class license was introduced. It can therefore be seen that Australia has had a no-code licence for something like 30 years, along with many other countries!

Basically, the "Limited" call allows full power and modes on all bands above 30 MHz, and indeed, much of the pioneering work on these bands was performed by these "Z" calls. Why are they called "Z" calls? Under the Australian licensing scheme, "Limited" calls were issued with the series "VKnZAA" to "VKnZZZ", subsequently extended to "Y" suffixes, then "X" suffixes, and now "T" suffixes.

David I. Horsfall VK2KFU
Australia

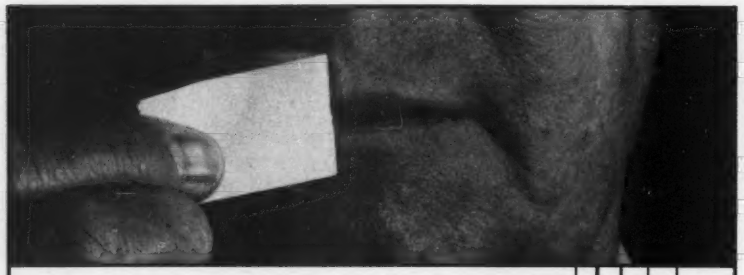

Now that you can speak, talk to Larsen.

Novice Enhancement opens up a whole new way for novices to communicate. To make the most of it, talk to Larsen Electronics.

We'll tell you how Larsen antennas can greatly improve your powers of communication. We'll also explain how Larsen 220 and 1296 MHz antennas are designed to give you the best performance.

Talk to your Larsen amateur dealer today, and see if Larsen performance doesn't speak for itself.

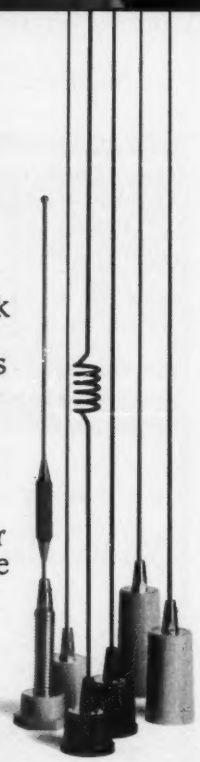

Larsen Antennas
The Amateur's Professional™

See your favorite amateur dealer or write for a free amateur catalog.

IN USA: Larsen Electronics, Inc., 11611 N.E. 50th Ave., P.O. Box 1799, Vancouver, WA 98668. 206-573-2722.
IN CANADA: Canadian Larsen Electronics, Ltd., 149 West 6th Avenue, Vancouver, B.C. V5Y 1K3. 604-872-8517.

CIRCLE 23 ON READER SERVICE CARD

Computerized CW

I have noticed that CW is not one of Wayne's favorite operating modes. (In fact, it probably does not have a spot on a lot of people's lists of operations.) However, I recently discovered the pleasures of CW via my computer. It is a very interesting way to get on the air.

My XYL gave me an AEA PK-232 for Christmas, and I have had a great time with packet, RTTY, and CW. This morning I had a 45-minute QSO with a local ham on 40m CW. We operated at 30 wpm and discussed antennas, the local ham politics, antenna projects, power supplies, etc.

Dust off your computer and try some computerized CW. I'll bet you enjoy it (despite yourself).

Tom Hart AD1B
Dedham, MA

Circuit Correction

I started building your circuit "Beacon Transmitter" in the April 1988 issue and found that there is a slight problem. In order to get the circuit to oscillate, you need to connect pin #6 to pin #2 on both IC-1 and IC-2. The way it is set up now, the circuit is in the monostable mode and needs a trigger to keep it going. With pin #6 and pin #2 connected, the circuit is in the astable mode and the oscillator will be free running.

Duane Tuma KA9UMM
Carpentersville, IL

KLM cushcraft CORPORATION TELEX hy-gain
KENWOOD TOKYO HY-POWER
Beckman Larsen HUSTLER
Heathkit ALLIANCE METRON ASTRON CORPORATION
Phillystran MIRAGE DAIWA
concepts Bearcat
Mosley
B&W
CENTURION
ICOM
TRIPP LITE
MFJ
Unarco-Rohn
TEN-TEC YAESU
Amphenol DIAMOND
SMILEY TE SYSTEMS
CES Cobra Kantronics AMERITRON

Our Antenna & Tower Discounts Are Tops

Hy-Gain, Cushcraft, Rohn, Tri-Ex, and Alliance Package Specials Available

Call and Compare Our Prices

KENWOOD

NEW TM-721A
2m/440 MHz dual-band mobile with deluxe features.

YAESU

NEW FT-212
Mini 2m mobile with 45 Watts

ICOM

IC-27A SPECIAL
25-Watt Mobile with UT-16 speech synthesizer already installed.
$349.95
Offer good while they last. Limited quantity subject to prior sale.

Orders & Quotes Toll Free 800-444-4799

ege inc™
1988 Buyer's Guide/Catalog Available - Send $1

EGE VIRGINIA
14803 Build America Drive, Bldg. B
Woodbridge, Virginia 22191
Information: (703) 643-1063
Service Dept: (703) 494-8750
Fax: (703) 494-3679
Store Hours: M-F: 10-6; Sat: 10-4
Order Hours: M-F 9-7; Sat: 10-4

EGE NEW ENGLAND
8 Stiles Road
Salem, New Hampshire 03079
New England (NH Included)
Toll Free: 800-444-0047
Info & Service: (603) 898-3750
Store Hours: MTuWF: 10—5
Th: 12—8; Sat: 10—4

Our associate store:
Lacombe Distributors
Davis & Jackson Road
P.O. Box 293
Lacombe, Louisiana 70445
Phone: (504) 882-5355

CIRCLE 133 ON READER SERVICE CARD

220 MHz
Model FT-312RM
Now Available

Introducing the only mobiles that double as answering machines.

Now you can stay in touch—even when you're away from your radio.

With Yaesu's 2-meter FT-212RH and 70-cm FT-712RH, an optional, internal digital voice recorder serves as a convenient answering machine for you and your friends. And that's just the beginning!

High performance mobiles. The FT-212RH features wideband receive coverage of 140-174 MHz (144-148 MHz Tx), while the FT-712RH covers 430-450 MHz. An oversize amber display includes an innovative photo-sensor which increases the display brightness during the day. The function buttons are arranged in a chromatic musical scale—ideal for visually-impared operators. You get 45 watts output on 2 meters, 35 watts on 70 cm.

An autodialer DTMF microphone with 10 memories, each ready to store telephone numbers up to 22 digits long.

And, like our FT-211RH Series mobiles, you'll enjoy surprisingly simple controls, yet highly sophisticated microprocessor-based flexibility. Including 18 memories that store frequency, offset, PL tone, and PL mode (CTCSS unit optional). Band or memory scanning. Offset tuning from any memory channel. Memory channel lockout for scanning. High-low power switch.

All in an amazingly small package, shown actual size below.

Digital voice recorder option. Only Yaesu brings you the advanced technology found in our digital voice recorder option.

You can store messages or your call sign—in your own voice, not a synthesized replica—or give your friends a private code for leaving messages on your radio. All they need is a DTMF microphone! Then you can play back your messages either in-person, or remotely by using another radio with a DTMF microphone. And you've always got security because you can command your radio to respond only to in-person playback requests.

Visit your Yaesu dealer today. And test drive Yaesu's FT-212RH and FT-712RH mobiles. The only radios with the power to keep you in touch. Always.

YAESU

Yaesu USA 17210 Edwards Road, Cerritos, CA 90701 (213) 404-2700. **Repair Service:** (213) 404-4884. **Parts:** (213) 404-4847.

Prices and specifications subject to change without notice. PL is a registered trademark of Motorola, Inc.

CIRCLE 111 ON READER SERVICE CARD

Others May Try to Imitate, But...

Only One Can Be The Best

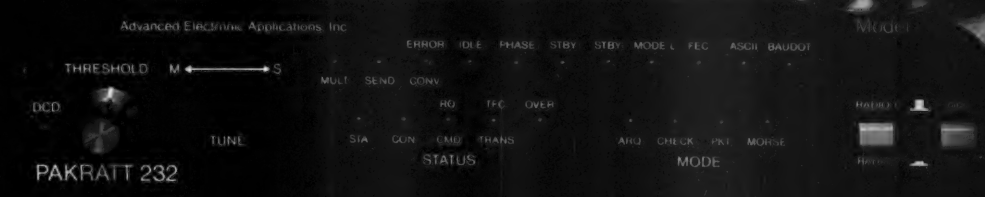

Morse Code - Baudot - ASCII - AMTOR - Packet - Facsimile - Navtex

Amateur Net Price $319.95

It's a lesson you learn very early in life. Many can be good, some may be better, but only one can be the best. The PK-232 is the best multi-mode data controller you can buy.

1 Versatility

The PK-232 should be listed in the amateur radio dictionary under the word Versatile. One data controller that can transmit and receive in six digital modes, and can be used with almost every computer or data terminal. You can even monitor Navtex, the new marine weather and navigational system. Don't forget two radio ports for both VHF and HF, and a no compromise VHF/HF/CW internal modem with an eight pole bandpass filter followed by a limiter discriminator with automatic threshold control.

The internal decoding program (SIAM[tm]) feature can even identify different types of signals for you, including some simple types of RTTY encryption. The only software your computer needs is a terminal program.



PC Pakratt Packet TX/RX Display



Facsimile Screen Display

2 Software Support

While you can use most modem or communications programs with the PK-232, AEA has two very special packages available exclusively for the PK-232....PC Pakratt with Fax for IBM PC and compatible computers, and Com Pakratt with Fax for the Commodore 64 and 128.

Each package includes a terminal program with split screen display, QSO buffer, disk storage of received data, and printer operation, and a second program for transmission/reception and screen display of facsimile signals. The IBM programs are on 5-1/4" disk and the Commodore programs are plug-in ROM cartridges.

3 Proven Winner

No matter what computer or terminal you plan to use, the PK-232 is the best choice for a multi-mode data controller. Over 20,000 amateurs around the world have on-air tested the PK-232 for you. They, along with most major U.S. amateur magazines, have reviewed the PK-232 and found it to be a good value and excellent addition to the ham station.

No other multi-mode controller offers the features and performance of the PK-232. Don't be fooled by imitations. Ask your friends, or call the local amateur radio store. We're confident the PK-232 reputation will convince you that it's time to order your very own PK-232.

Call an authorized AEA dealer today. You deserve the best you can buy, you deserve the PK- 232.

Advanced Electronic Applications, Inc.

P.O. Box C-2160
Lynnwood, WA 98036
206-775-7373

AEA Brings you the Breakthrough!

CIRCLE 65 ON READER SERVICE CARD

OP ED

by Larry Ledlow, Jr. NA5E

Promoting the Higher Bands

Apparently, most hams' ideas of DX involve the HF bands. Ask a ham to describe what it's like to operate above 30 MHz, and more often than not you'll hear terms like "two meters," "FM" and "repeaters." We have ourselves to blame for perpetuating such narrow views of hamming. We humans sure are creatures of habit. Well, when the language gets too bad on the local two meter machine, or when you get hoarse from yelling into a pileup on 20 meters, think long and hard about exploring some of the many (albeit poorly publicized) possibilities on the VHF and UHF bands.

DX and Contests

Beauty, of course, is in the eye of the beholder, and so is DX. Those two letters, which make up the most popular term in the ham radio lexicon, definitely take on new meaning and present fantastically fun challenges above 30 MHz. Whether chasing countries, zones, states, or grid squares, the DXer gets a kick from working a new one. The tally is a testimony to his or her tenacity and skill. VHF DX is no different.

Six meters usually receives a lot of attention during a few years of every solar cycle. Sporadic E propagation occurs each year, but when the solar index begins to peak, six meters can support worldwide contacts. DXCC and *73*'s DX Dynasty Award on six are becoming relatively easy to obtain, too, since more countries are adopting amateur radio allocations on this band.

More and more DXpeditions these days take along gear for six meters. For example, both Jim Treybig W6JKV on Aruba and Harry Schools KA3B on St. Pierre will have six meter gear turned on for the June 11–12 VHF QSO Party. Bart Jahnke KB9NM will activate 4U1UN on 50 through 2304 MHz (!) for the contest, too. (Don't forget that 4U1UN counts for DX-DA and DXCC country credit. It is also in grid square FN30). July 7–14 will also see some HF and six meter activity from PJ0M, courtesy of the Six Meter DX Society.

Two and 1.25 meters and 70cm usually come alive with DX activity during the summer, too. Most DX action here is due to tropospheric ducting, which actually occurs with great regularity during the warmest months. Contacts over several hundred miles are very common, even on a bad day. When I lived in the UK, I regularly worked two meters into France, Germany, Switzerland, Scandanavia, and even Eastern Europe using 25 watts from my IC-290H and a single KLM-13LBA antenna. (Get Wayne to tell you about his two meter exploits 40 years ago. Now *that's* DX.) Although the majority of DX contacts involve SSB and CW, try giving a shout on 145.52 FM simplex once in a while.

Our own Pete Putman KT2B and company will take advantage of the generally good VHF and UHF summer conditions along the East Coast to operate in the June QSO Party from Chincoteague Island (grid FM27). His group plans an impressive operation on 50, 144, 220, 430, 903, 1296, and 2304 MHz. Do you think any of these guys would work so hard to turn on these bands if there wasn't any DX action and excitement on VHF and UHF?

"Do you think any of these guys would work so hard to turn on these bands if there wasn't any DX action and excitement on VHF and UHF?"

Modest Requirements

No, you don't need to go out and spend a zillion dollars on good VHF/UHF gear. You can get perfectly acceptable results with transverters, which will take an SSB signal from, say, your HF rig, translate it to a higher frequency, and downconvert VHF/UHF signals for reception on the HF rig. Many transverters come in kit form, but others are already assembled. You don't need kilowatts of power to have a respectable signal on the higher bands, either. One or 200 watts is serious RF at these frequencies, and a modest VHF amplifier costs about one tenth the price of an HF amplifier.

I like to work at VHF and UHF, because the erection of a high gain antenna system doesn't require a great deal of real estate or manpower. Rotor systems are smaller, too.

All in all, you keep the costs down with smaller system requirements. Take a look at previous "Above and Beyond" columns to see how inexpensively you can get on the other bands.

Campaign for 902 MHz

Not long ago I asked a few hams if they knew of any activity in their area on the 33cm band. More than one answered with something like, "You mean 1296? Nah." No, I meant 33cm, not 23. "*That's* not a ham band . . . is it?" All together, now, turn to Section 97.61 of the Amateur Radio Service Rules and Regulations. Yes, the 902–928 MHz band is allocated to amateur radio.

"Think long and hard about exploring some of the many (albeit poorly publicized) possibilities on the VHF and UHF bands."

Take a look at the 1987–88 *ARRL Repeater Directory*. You'll find a handful of 900 MHz ATV repeaters and two-and-a-half dozen FM repeaters scattered from Massachusetts to California. Disappointing, to say the least, but understandable considering the lack of readily available 900 MHz equipment. Certainly the Big Three amateur radio manufacturers don't support 902 MHz, and I've only come across a couple of 33cm transverters in the past several years.

I don't get it. We go to all the trouble to get a 902 MHz allocation from WARC, and hardly anyone takes advantage of it! You'd better believe that 902 MHz is next on the commercial interest hit list. They'll be after that band once they get 220 MHz.

I had a nice chat the other day on 70cm with Harry Chase WA1VVH. Harry's got the UHF bug, and he's doing a lot of interesting work on 902 and 1296 MHz. In fact, Harry is custodian of the 919.10 MHz repeater in Pepperell, MA. He expressed disappointment at the lack of press 902 MHz gets. I have been pro-902 from the beginning, and I thought Harry brought up some valid points. I think *73* should do its bit to promote activity on 33cm.

There's a great lack of detailed information on groups actually involved with 33cm work. I know of a few ATV and repeater clubs, and packeteers are investigating high-speed networks on this band. Most of these groups operate in relative isolation, however. We need to document and keep track of all the activity on 902 MHz to aid and encourage these groups' work. Also, a central source of 33cm material would help dispel the notion that there's no activity on the band. This will be very important when the FCC accepts a petition from a commercial interest group to take the 33cm band away from us.

Thus, we have two main goals for the "73 for 33" campaign. We need an individual or group to coordinate and disseminate 33cm information, and to keep 902 MHz enthusiasts in touch with each other. Then, of course, we need the shakers and movers at 902 to start writing articles promoting the band. Since there is little commercial gear available, I expect quite a few good 33cm projects to grace the pages of *73*. Get busy and start writing!

Is this just a 902 MHz pie in the sky? Well, that's what a lot of people thought about Wayne's push for FM repeaters 20 years ago. Sometime around 1998, when I ask hams to describe the activity on VHF and UHF, I expect to hear things like "digital ATV," "40 megabaud," and even "902 MHz." Remember, 73 for 33! ■

Yaesu's FT-736R. Because you never know who's listening.



Why just dream of talking beyond earth?

With Yaesu's new FT-736R VHF/UHF base station, you can discover some of the best DX happening in ham radio. Via moonbounce. Tropo. Aurora. Meteor scatter. Or satellites.

You see, the FT-736R is the most complete, feature-packed rig ever designed for the serious VHF/UHF operator. But you'd expect this of the successor to our legendary FT-726R.

For starters, the FT-736R comes factory-equipped for SSB, CW and FM operation on 2 meters and 70 cm (430-450 MHz!), with two additional slots for optional 50-MHz, 220-MHz, or 1.2-GHz modules.

Crossband full duplex capability is built into every FT-736R for satellite work. And the satellite tracking function (normal *and* reverse modes) keeps you on target through a transponder.

The FT-736R delivers 25 watts RF output on 2 meters, 220 MHz, and 70 cm. And 10 watts on 6 meters and 1.2 GHz. Store frequency, mode, PL frequency, and repeater shift in each of the 100 memories.

For serious VHF/UHF work, use the RF speech processor. IF shift. IF notch filter. CW and FM wide/narrow IF filters. VOX. Noise blanker. Three-position AGC selection. Preamp switch for activating your tower-mount preamplifier. Even an offset display for measuring observed Doppler shift on DX links.

And to custom design your FT-736R station, choose from these popular optional accessories: Iambic keyer module. FTS-8 CTCSS encode/decode unit. FVS-1 voice synthesizer. FMP-1 AQS digital message display unit. 1.2-GHz ATV module. MD-1B8 desk microphone. E-736 DC cable. And CAT (Computer Aided Transceiver) system software.

Discover the FT-736R at your Yaesu dealer today. But first make plenty of room for exotic QSL cards. Because you *never* know who's listening.

YAESU

Yaesu USA, 17210 Edwards Road, Cerritos, CA 90701. (213) 404-2700. Repair Service: (213) 404-4884. Parts: (213) 404-4847.

Prices and specifications subject to change without notice. PL is a registered trademark of Motorola, Inc. FT-736R shown with 220-MHz option installed.

CIRCLE 193 ON READER SERVICE CARD

KENWOOD

pacesetter in Amateur Radio

DX-cellence!

#1 Rated HF!

TS-940S

Competition class HF transceiver

TS-940S—the standard of performance by which all other transceivers are judged. Pushing the state-of-the-art in HF transceiver design and construction, no one has been able to match the TS-940S in performance, value and reliability. The product reviews glow with superlatives, and the field-proven performance shows that the TS-940S is "The Number One Rated HF Transceiver!"

- **100% duty cycle transmitter.** Kenwood specifies transmit duty cycle ***time.*** The TS-940S is guaranteed to operate at full power output for periods ***exceeding one hour.*** (14.250 MHz, CW, 110 watts.) Perfect for RTTY, SSTV, and other long-duration modes.
- **First with a full one-year limited warranty.**
- **Extremely stable phase locked loop (PLL) VFO.** Reference frequency accuracy is measured in ***parts per million!***






2.
Interfering signal
Desired signal
Noise
AF signal spectrum
AF tune operation
•The AF TUNE function reduces interfering signals and white noise.
•This function should only be used during operation in the CW mode.



1) CW Variable Bandwidth Tuning. Vary the passband width continuously in the CW, FSK, and AM modes, without affecting the center frequency. This effectively minimizes QRM from nearby SSB and CW signals.

2) AF Tune. Enabled with the push of a button, this CW interference fighter inserts a tunable, three pole active filter between the SSB/CW demodulator and the audio amplifier. During CW QSOs, this control can be used to reduce interfering signals and noise, and peaks audio frequency response for optimum CW performance.

3) SSB Slope Tuning. Operating in the LSB and USB modes, this front panel control allows independent, continuously variable adjustment of the high or low frequency slopes of the IF passband. The LCD sub display illustrates the filtering position.

4) IF Notch Filter. The tunable notch filter sharply attenuates interfering signals by as much as 40 dB. As shown here, the interfering signal is reduced, while the desired signal remains unaffected. The notch filter works in all modes except FM.

- **Complete all band, all mode transceiver with general coverage receiver.** Receiver covers 150 kHz-30 MHz. All modes built-in: AM, FM, CW, FSK, LSB, USB.
- **Superb, human engineered front panel layout for the DX-minded or contesting ham.** Large fluorescent tube main display with dimmer; direct keyboard input of frequency; flywheel type main tuning knob with optical encoder mechanism all combine to make the TS-940S a joy to operate.
- **One-touch frequency check (T-F SET) during split operations.**
- **Unique LCD sub display indicates VFO, graphic indication of VBT and SSB Slope tuning, and time.**
- **Simple one step mode changing with CW announcement.**
- **Other vital operating functions.** Selectable semi or full break-in CW (QSK), RIT/XIT, all mode squelch, RF attenuator, filter select switch, selectable AGC, CW variable pitch control, speech processor, and RF power output control, programmable band scan or 40 channel memory scan.

Optional accessories:
• AT-940 full range (160-10m) automatic antenna tuner • SP-940 external speaker with audio filtering • YG-455C-1 (500 Hz), YG-455CN-1 (250 Hz), YK-88C-1 (500 Hz) CW filters; YK-88A-1 (6 kHz) AM filter • VS-1 voice synthesizer • SO-1 temperature compensated crystal oscillator • MC-43S UP/DOWN hand mic. • MC-60A, MC-80, MC-85 deluxe base station mics. • PC-1A phone patch • TL-922A linear amplifier • SM-220 station monitor • BS-8 pan display • SW-200A and SW-2000 SWR and power meters • IF-232C/IF-10B computer interface.

Complete service manuals are available for all Kenwood transceivers and most accessories. Specifications, features, and prices are subject to change without notice or obligation.

KENWOOD

KENWOOD U.S.A. CORPORATION
2201 E. Dominguez St., Long Beach, CA 90810
P.O. Box 22745, Long Beach, CA 90801-5745